

**CALIFORNIA ENERGY COMMISSION**

**EXPRESS TERMS (15-DAY LANGUAGE)**

**and**

**NOTICE OF ADOPTION HEARING**

**FOR PROPOSED AMENDMENTS TO**

**CALIFORNIA CODE OF REGULATIONS, TITLE 20:  
DIVISION 2, CHAPTER 4: ENERGY CONSERVATION,  
ARTICLE 4: APPLIANCE EFFICIENCY REGULATIONS,  
SECTIONS 1601 - 1608**

**and**

**CALIFORNIA CODE OF REGULATIONS, TITLE 24:  
PART 6, SUBCHAPTER 2: BUILDING STANDARDS,  
SECTIONS 110 - 111:**

**Docket No. 01-AB970-APSTD**

**January 22, 2002**

This document ("15-Day Language") contains proposed regulations on appliance efficiency. This 15-Day Language shows changes to the 45-Day Language that was published on November 23, 2001, with additions to the 45-Day Language shown in underline and deletions from the 45-Day Language shown in ~~strikeout~~. The California Energy Commission proposes to amend the existing regulations in the sections listed above by substituting the 15-Day Language as shown here.

The Commission will hold a hearing to consider adopting the 15-Day Language on Wednesday, February 6, 2002, beginning at 10:00 a.m., in Hearing Room A at 1516 Ninth Street, Sacramento, California. Written and oral comments on the changes in the 15-Day Language may be submitted until the end of the hearing. The comment period on the 45-Day Language is closed. No additional comments will be accepted on the 45-Day Language – the only new comments that are allowed are comments on the proposed 15-Day Language changes, except that persons who submitted comments on the 45-Day Language may briefly summarize those comments orally at the hearing. Comments that were submitted during the comment period on the 45-Day Language are in the rulemaking record and are being fully considered by the Commission.

**CALIFORNIA ENERGY COMMISSION**

**EXPRESS TERMS  
(15-DAY LANGUAGE)**

**PROPOSED AMENDMENTS TO**

**CALIFORNIA CODE OF REGULATIONS, TITLE 20:  
DIVISION 2, CHAPTER 4, ARTICLE 4, SECTIONS 1601 - 1608:  
APPLIANCE EFFICIENCY REGULATIONS**

**and**

**CALIFORNIA CODE OF REGULATIONS, TITLE 24:  
PART 6, SUBCHAPTER 2, SECTIONS 110 - 111:  
BUILDING STANDARDS**

**EFFECTIVE DATE: JULY 1, 2002  
(EXCEPT AS OTHERWISE NOTED)**

**Docket No. 01-AB970-APSTD**

**January 22, 2002**

NOTE: THIS "15-DAY LANGUAGE" SHOWS PROPOSED CHANGES TO THE 45-DAY LANGUAGE THAT WAS PUBLISHED ON NOVEMBER 23, 2001. ADDITIONS ARE SHOWN IN UNDERLINE AND DELETIONS IN ~~STRIKEOUT~~. - THE ENERGY COMMISSION WILL CONSIDER ADOPTING THE 15-DAY LANGUAGE AT A HEARING BEGINNING AT 10:00 A.M. ON FEBRUARY 6, 2002.

**(1) PROPOSED CHANGES TO APPLIANCE EFFICIENCY REGULATIONS FOR**

(a) REFRIGERATORS, REFRIGERATOR-FREEZERS, AND FREEZERS

(b) ROOM AIR CONDITIONERS

(c) CENTRAL AIR CONDITIONERS

(d) SPOT AIR CONDITIONERS

(e) GAS AND OIL SPACE HEATERS

(f) WATER HEATERS

(g) POOL HEATERS

(h) PLUMBING FITTINGS

(i) PLUMBING FIXTURES

(j) FLUORESCENT LAMP BALLASTS

(k) LAMPS

(l) EMERGENCY LIGHTING

(m) TRAFFIC SIGNAL MODULES

(n) LUMINAIRES

(o) DISHWASHERS

(p) CLOTHES WASHERS

(q) CLOTHES DRYERS

(r) COOKING PRODUCTS AND FOOD SERVICE EQUIPMENT

(s) ELECTRIC MOTORS

(t) DISTRIBUTION TRANSFORMERS

California Code of Regulations, Title 20:  
Division 2, Chapter 4, Article 4 Sections 1601 – 1608:  
Appliance Efficiency Regulations

**AND**

**(2) CORRESPONDING CHANGES TO BUILDING STANDARDS**

California Code of Regulations, Title 24  
Part 6, Subchapter 2, Sections 110-111:  
Building Standards

**California Energy Commission  
January 22, 2002**

## TABLE OF CONTENTS

<b><u>Section</u></b>	<b><u>Title</u></b>	<b><u>Page</u></b>
TITLE 20 APPLIANCE EFFICIENCY REGULATIONS		
1601	Scope and Effective Date .....	1
1602	Definitions and Rules of Construction.....	3
1603	Testing: All Appliances .....	33
1604	Test Methods for Specific Appliances .....	35
1605	Energy Performance, Energy Design, Water Performance, and Water Design Standards: In General .....	57
1605.1	Federally-Regulated Appliances: Standards Applicable to Both Sale (Federal Enforcement) and to Title 24 Construction (California Enforcement) .....	59
1605.2	State Standards for Federally-Regulated Appliances: Standards Applicable to Both Sale (California Enforcement) and to Title 24 Construction (California Enforcement).....	79
1605.3	State Standards for Non-Federally-Regulated Appliances: Standards Applicable to Both Sale (California Enforcement) and to Title 24 Construction (California Enforcement).....	85
1606	Filing by Manufacturers; Listing of Appliances in Database.....	99
1607	Marking of Appliances.....	123
1608	Compliance, Enforcement, and General Administrative Matters .....	127
TITLE 24 BUILDING STANDARDS		
110	Systems and Equipment – General .....	133
111	Mandatory Requirements for Appliances Regulated by the Appliance Efficiency Regulations .....	134

(This Table of Contents is not part of the Proposed Regulations but is provided here for the convenience of the reader.)

## LIST OF TABLES

<b><u>Table</u></b>	<b><u>Title</u></b>	<b><u>Page</u></b>
A-1	Non-Commercial Refrigerator, Refrigerator-Freezer, and Freezer Test Methods .....	35
A-2	Commercial Refrigerator, Refrigerator-Freezer, and Freezer Test Methods.....	36
B-1	Room Air Conditioner, Room Air-Conditioning Heat Pump, Packaged Terminal Air Conditioner, and Packaged Terminal Heat Pump Test Methods .....	37
C-1	Central Air Conditioner Test Methods .....	38
E-1	Gas and Oil Space Heater Test Methods.....	39
F-1	Small Water Heater Test Methods .....	40
G	Pool Heater Test Methods .....	47
P-1	Clothes Washer Test Methods.....	50
R	Cooking Product and Food Service Equipment Test Methods.....	50
A-3	Standards for Refrigerators, Refrigerator-Freezers, and Freezers.....	60
B-2	Standards for Room Air Conditioners and Room Air-Conditioning Heat Pumps.....	61
B-3	Standards for Packaged Terminal Air Conditioners and Packaged Terminal Heat Pumps .....	62
C-2	Standards for Single Phase Air-Cooled Air Conditioners with Cooling Capacity Less than 65,000 Btu Per Hour and Single Phase Air-Source Heat Pumps with Cooling Capacity Less than 65,000 Btu Per Hour, Not Subject to EPA Act .....	62
C-3	Standards for Air-Cooled Air Conditioners and Air-Source Heat Pumps Subject to EPA Act.....	63
C-4	Standards for Evaporatively-Cooled Air Conditioners .....	63
C-5	Standards for Water-Cooled Air Conditioners and Water-Source Heat Pumps .....	64
E-2	Standards for Gas Wall Furnaces, Floor Furnaces, and Room Heaters.....	65
E-3	Standards for Gas- and Oil-Fired Central Boilers .....	66
E-4	Standards for Gas- and Oil-Fired Central Furnaces .....	66

## LIST OF TABLES (Continued)

<b><u>Table</u></b>	<b><u>Title</u></b>	<b><u>Page</u></b>
F-2	Standards for Large Water Heaters (Effective January 1, 1994 through October 28, 2003).....	67
F-3	Standards for Large Water Heaters (New Standards Effective October 29, 2003) .....	68
F-4	Standards for Large Water Heaters (Existing Standards Remaining in Effect On and After October 29, 2003) .....	69
F-5	Standards for Small Federally-Regulated Water Heaters .....	69
H-1	Standards for Plumbing Fittings .....	70
I	Standards for Plumbing Fixtures .....	71
J-1	Standards for Fluorescent Lamp Ballasts and Replacement Fluorescent Lamp Ballasts.....	72
J-2	Standards for Fluorescent Lamp Ballasts .....	72
K-1	Standards for General Service Fluorescent Lamps .....	73
K-2	Standards for Incandescent Reflector Lamps.....	73
O	Standards for Dishwashers .....	74
P-2	Standards for Clothes Washers.....	75
Q	Standards for Clothes Dryers.....	76
S	Standards for Electric Motors.....	77
C-6	Standards for Air-Cooled Air Conditioners and Air-Source Heat Pumps.....	81
A-4	Standards for Wine Chillers.....	85
A-5	Standards for Freezers.....	85
A-6	Standards for Reach-In Cabinets, Pass-Through Cabinets, Roll-In or Roll-Through Cabinets, and Wine Chillers that are Not Consumer Products.....	86
C-7	Standards for Water-Source and Ground Water-Source Heat Pumps Manufactured On or After January 1, 1993, but Before October 29, 2003 .....	87

## LIST OF TABLES (Continued)

<b><u>Table</u></b>	<b><u>Title</u></b>	<b><u>Page</u></b>
C-8	Standards for Ground Water-Source and Ground Source Heat Pumps Manufactured On or After October 29, 2003 .....	88
C-9	Standards for Air-Cooled Computer Room Air Conditioners .....	88
C-10	Standards for Water-Cooled, Glycol-Cooled, and Evaporatively-Cooled Computer Room Air Conditioners .....	89
E-5	Standards for Boilers.....	90
E-6	Standards for Furnaces.....	90
E-7	Standards for Duct Furnaces and Unit Heaters .....	91
F-6	Standards for Small Water Heaters that are Not Federally-Regulated Consumer Products .....	92
H-2	Standards for Tub Spout Diverters .....	93
L	Standards for Exit Signs .....	94
M	Standards for Traffic Signal Modules .....	95
P-3	Standards for Commercial Clothes Washers.....	96
T	Standards for Distribution Transformers.....	97
U	Data Submittal Requirements.....	102
V	Requirements for Marking of Federally-Regulated Commercial and Industrial Equipment.....	124

(This List of Tables is not part of the Proposed Regulations but is provided here for the convenience of the reader.)

**CALIFORNIA CODE OF REGULATIONS, TITLE 20:  
DIVISION 2, CHAPTER 4, ARTICLE 4, SECTIONS 1601-1608:  
APPLIANCE EFFICIENCY REGULATIONS**

**Section 1601. Scope and Effective Date.**

The amendments to this Article take effect on July 1, 2002, unless otherwise noted. Until the amendments take effect, the provisions of this Article that were in effect before adoption of the amendments remain in effect.

This Article applies to the following types of new appliances, if they are sold in California or installed in Title 24 construction, except those sold wholesale in California for final retail sale outside the state and those designed and sold exclusively for use in recreational vehicles, or other mobile equipment.

- (a) Refrigerators, refrigerator-freezers, and freezers that can be operated by alternating current electricity, including but not limited to refrigerating bottled or canned beverage vending machines, but excluding the following types:
  - (1) consumer products with total refrigerated volume exceeding 39 ft<sup>3</sup>;
  - (2) commercial refrigerators, commercial refrigerator-freezers, and commercial freezers with total refrigerated volume exceeding 85 ft<sup>3</sup>;
  - (3) refrigerators, refrigerator-freezers, and freezers designed to be used without doors (other than those intended for the display of canned or bottled beverages);
  - (4) remote refrigerators, remote refrigerator-freezers, and remote freezers; and
  - (5) blast chillers.
- (b) Room air conditioners, room air-conditioning heat pumps, packaged terminal air conditioners, and packaged terminal heat pumps.
- (c) Central air conditioners, which are electrically powered unitary air conditioners and electrically-powered unitary heat pumps, except those designed to operate without a fan; and gas-fired air conditioners and gas-fired heat pumps, ~~including but not limited to engine-driven heat pumps, absorption-cycle heat pumps, and desiccant-type heat pumps.~~
- (d) Spot air conditioners.
- (e) Vented gas space heaters and vented oil space heaters, ~~including but not limited to~~ vented and unvented -infrared gas space heaters, and gas-fired combination space-heating and water-heating appliances; ~~and unvented infrared gas space heaters.~~

*Note: See Health and Safety Code Section 19881 for restrictions on the sale of unvented gas space heaters and unvented oil space heaters.*



**1601**

- (f) Water heaters, including but not limited to hot water supply boilers.
- (g) Gas pool heaters, oil pool heaters, electric resistance pool heaters, and heat pump pool heaters.
- (h) Plumbing fittings, which are showerheads, lavatory faucets, kitchen faucets, metering faucets, replacement aerators, wash fountains, and tub spout diverters.
- (i) Plumbing fixtures, which are water closets and urinals.
- (j) Fluorescent lamp ballasts that are designed to (1) operate at nominal input voltages of 120 or 277 volts, (2) operate with an input current frequency of 60 Hertz, and (3) be used with T5, T8, or T12 lamps.
- (k) Lamps, which are general service fluorescent lamps and incandescent reflector lamps.
- (l) Emergency lighting, which is illuminated exit signs.
- (m) Traffic signal modules and traffic signal lamps.
- (n) Luminaires, which are torchieres.
- (o) Dishwashers that are federally-regulated consumer products.
- (p) Clothes washers that are federally-regulated consumer products; and commercial clothes washers.
- (q) Clothes dryers that are federally-regulated consumer products.
- (r) Cooking products that are federally-regulated consumer products; and food service equipment.
- (s) Electric motors, excluding definite purpose motors, special purpose motors, and motors exempted by the U.S. Department of Energy under 42 U.S.C. Section 6313(b).
- (t) Low voltage dry-type distribution transformers that are designed to operate at a frequency of 60 Hertz, and that have a rated power output of not less than 15 kVa.

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.

Reference: Sections 25402(c) and 25960, Public Resources Code.

## Section 1602. Definitions and Rules of Construction.

### Rules of Construction.

- (1) Where the context requires, the singular includes the plural and the plural includes the singular.
- (2) The use of “and” in a conjunctive provision means that all elements in the provision must be complied with, or must exist in order to make the provision applicable. “Or” (rather than “and/or”) is used where compliance with one or more elements suffices, or where the existence of one or more elements makes the provision applicable.
- (3) “Shall” is mandatory and “may” is permissive.

**Definitions.** In this Article the following definitions apply. If a term is not defined here, the applicable definition in NAECA, EPAAct, or the test methods listed in Section 1604 shall apply where it is reasonable to do so.

#### (a) General.

“Accessible place” means a place on an appliance that can be easily seen without the need for tools to remove any covering (1) by a consumer if the appliance is on display in a store or (2) by a building official if the appliance is installed in Title 24 construction.

“AHAM” means the Association of Home Appliance Manufacturers.

“ANSI” means the American National Standards Institute.

“Approved industry certification program” means an appliance certification program that the Executive Director has determined, pursuant to Section 1603(b):

- (1) is operated by an appliance manufacturer trade association or other entity approved by the Executive Director;
- (2) is accredited by ANSI or ISO, or has received from a nationally-recognized entity an approval that provides substantially similar guarantees of substantive and procedural reliability and accuracy; and
- (3) provides:
  - (A) an internet-accessible listing of appropriate energy performance information that is updated at least every 6 months;
  - (B) testing of appliances according to applicable test methods and accurate reporting of test results;
  - (C) listings that:
    - (i) include no appliance not meeting an applicable federal standard,

- (ii) clearly and distinctly indicate which appliances meet the applicable federal standard but do not meet an applicable California standard, which shall be identified, and
- (iii) where there is no federal standard, clearly and distinctly indicate which appliances do not meet an applicable California standard which shall be identified; and
- (D) verification of manufacturer-submitted data;
- (E) an appropriate procedure for program participants to challenge listed information; and
- (F) compatibility with the database described in Section 1606(c).

“ARI” means the Air-Conditioning and Refrigeration Institute.

“ASHRAE” means the American Society of Heating, Refrigerating and Air-Conditioning Engineers.

“ASME” means the American Society of Mechanical Engineers, International.

“Basic model” of a federally-regulated consumer product means “basic model” as defined in 10 CFR Section 430.2 (2009<sup>1</sup>). “Basic model” of any other appliance means all units of a given type of appliance (or class thereof) that are manufactured by one manufacturer, that have the same primary energy source, and that do not have any differing electrical, hydraulic, physical, or functional characteristics that affect energy consumption.

“Btu” means British thermal unit.

“°C” means degrees Celsius.

“CFR” means Code of Federal Regulations.

“Commission” means the California Energy Commission.

“Consumer product” means any article of a type which, to any significant extent, is distributed in commerce for personal use or consumption by individuals.

“CSA” means CSA International.

“Database” means the database established pursuant to Section 1606(c).

“Date of sale” means the day when the appliance is physically delivered to the buyer.

“Design standard” means a prescriptive standard, such as a ban on constant burning pilots or a requirement that a clothes washer have a particular feature.

“Directory” means a directory, a supplement thereto, or a part of a directory or supplement.

“Electric resistance heating” means the production of heat by passing electric current through a resistive element.

“Energy efficiency standard” means a performance standard expressed in numerical form, such as energy factor, EER, or thermal efficiency.

“EPA” means the Energy Policy Act of 1992, 42 U.S.C. Section 6311 et seq.

“Executive Director” means the Executive Director of the Commission or his or her designee.

“°F” means degrees Fahrenheit.

["Federally-regulated appliance" means an appliance that is federally-regulated commercial and industrial equipment or a federally-regulated consumer product.](#)

“Federally-regulated commercial and industrial equipment” means commercial and industrial equipment for which there exists a test method and an energy conservation standard prescribed by or under EPA.

“Federally-regulated consumer product” means a consumer product for which there exists a test method and an energy conservation standard prescribed by or under NAECA.

“FSTC” means Pacific Gas and Electric Company’s Food Service Technology Center.

“Gallon (g)” means U.S. liquid gallon.

“GAMA” means the Gas Appliance Manufacturers Association.

“Gas” means natural gas or ~~a~~ liquefied petroleum gas.

[“gpm” means gallons per minute.](#)

“HI” means the Hydronics Institute.

“IAPMO” means the International Association of Plumbing and Mechanical Officials.

“ISO” means the International Organization for Standardization.

[“kW” means kilowatt.](#)

“kWh” means kilowatt-hour.

“LPG” means liquefied petroleum gas.

“Manufacturer” means any person engaged in the original production or assembly of an appliance. For plumbing fittings, “manufacturer” also means a private brand packager or reassembler.

“Model” means any collection of appliance units to which the manufacturer has assigned the same model number.

“Model number” means a combination of letters, digits, or characters representing the manufacturer, brand, design, or performance of an appliance.

“NAECA” means the National Appliance Energy Conservation Act, 42 U.S.C. Section 6291 et seq.

“NEMA” means the National Electrical Manufacturers Association.

“NFPA” means the National Fire Protection Association.

“Non-federally-regulated appliance” means an appliance that is neither federally-regulated commercial and industrial equipment nor a federally-regulated consumer product.

“NSF International” means the National Sanitation Foundation, International.

“Other mobile equipment” means transportation machinery including but not limited to cars, trucks, trains, airplanes, boats, and buses, but excluding mobile homes and manufactured homes.

“Ozone-depleting substance” means any substance that has been found by the United States Environmental Protection Agency to act as a catalyst in the breaking down of ozone, O<sub>3</sub>, into molecular oxygen, O<sub>2</sub>.

“Performance standard” means a standard that specifies a minimum level of energy or water efficiency or of a maximum level of energy or water consumption of an appliance.

“Recreational vehicle” means a van or utility vehicle used for recreational purposes.

“Title 24 construction” means building construction that is within the scope of Section 100 of Subchapter 2 of Part 6 of Title 24 of the California Code of Regulations and for which a building permit is required under Section 10-103(d)1 of Article 1 of Part 1 of Title 24 of the California Code of Regulations.

“UL” means Underwriters Laboratories, Inc.

“U.S.C.” means the United States Code.

**(b) Refrigerators, Refrigerator-Freezers, and Freezers.**

“Automatic defrost system” means a defrost system in which the defrosting action for refrigerated surfaces is initiated ~~and/or~~ terminated automatically.

“Blast chiller” means a refrigerator designed to cool food products from 140° F to 40° F within four hours.

Buffet table” means a commercial refrigerator, such as a salad bar, that is designed with mechanical refrigeration and that is intended to receive refrigerated food, to maintain food product temperatures, and for customer service.

“Chest freezer” means a freezer to which access is gained through a top-opening door.

“Commercial freezer” means a freezer that is not a federally-regulated consumer product.

“Commercial refrigerator” means a refrigerator that is not a federally-regulated consumer product.

“Commercial refrigerator-freezer” means a refrigerator-freezer that is not a federally-regulated consumer product.

“Compact freezer” means a freezer that has total volume less than 7.75 ft<sup>3</sup> rated volume, as determined using 10 CFR, Part 430, Appendix B1 of Subpart B (2001), and that is 36 inches or less in height.

“Compact refrigerator” means a refrigerator that has total volume less than 7.75 ft<sup>3</sup> rated volume, as determined using 10 CFR, Part 430, Appendix A1 of Subpart B (2001), and that is 36 inches or less in height.

“Compact refrigerator-freezer” means a refrigerator-freezer that has total volume less than 7.75 ft<sup>3</sup> rated volume, as determined using 10 CFR, Part 430, Appendix A1 of Subpart B (2001), and that is 36 inches or less in height.

“Drawer unit” means a residential refrigerator, residential freezer, or residential refrigerator-freezer one or more of whose [externally-accessed](#) compartments are drawers.

“Freezer” means a cabinet that is designed as a unit for the freezing and storage of food, beverages, or ice at temperatures of 0° F or below and that has a source of refrigeration requiring an energy input.

“Freezer compartment” means a compartment designed for the freezing and storage of food at temperatures below 8° F.

“Freezer volume” means net freezer compartment volume as defined in ANSI/AHAM ~~HRF-1-1979~~[HRF1-1988](#).

“Ice cream cabinet” means a reach-in cabinet commercial freezer that has top, or top and side, doors that are hinged or sliding and that is designed for the storage or dispensing of ice cream [or similar foods](#).

“Integrated average product temperature” means the integrated average of all test package temperatures ~~recorded at 15 minute intervals~~ as determined using the applicable test method in Section 1604(a).

“Internal freezer refrigerator” means a refrigerator that includes a compartment contained within the refrigerator cabinet that is designed for the short-term storage of food at temperatures below 32° F.

“Kitchen unit” means a compact refrigerator, with or without an internal freezer, integrated with other appliances or facilities, including but not limited to microwave ovens, sinks, and electric cooktops.

“Manual defrost system” means a defrost system in which the defrosting action for refrigerated surfaces is initiated or terminated manually.

“Milk, beverage, and ice cream cabinet” means a reach-in cabinet commercial refrigerator-freezer that has top, or both top and side, doors that are hinged or sliding and that is designed for the storage or dispensing of milk or other beverages, and ice cream or similar foods.

“Milk or beverage cabinet” means a reach-in cabinet commercial refrigerator that has top, or both top and side, doors that are hinged or sliding and that is designed for the storage or dispensing of milk or other beverages.

“Non-commercial freezer” means (1) a freezer that is a federally-regulated consumer product or (2) a freezer exceeding 30 ft<sup>3</sup> but not exceeding 39 ft<sup>3</sup> that is a consumer product.

“Non-commercial refrigerator” means a refrigerator that is a federally-regulated consumer product or a wine chiller that is a consumer product.

“Non-commercial refrigerator-freezer” means a refrigerator-freezer that is a federally-regulated consumer product.

“Partial automatic defrost system” means a defrost system in which the defrosting action for refrigerated surfaces in the refrigerator compartment is initiated and terminated automatically and the defrosting action for refrigerated surfaces in the freezer is initiated manually.

“Pass-through cabinet” means a commercial refrigerator or commercial freezer with hinged or sliding doors on both front and rear of the refrigerator or freezer.

“Preparation table” means a commercial refrigerator with a countertop refrigerated compartment with or without cabinets below, and with self-contained refrigeration equipment.

“Reach-in cabinet” means a commercial refrigerator, commercial refrigerator-freezer, or commercial freezer with hinged or sliding doors or lids, but excluding roll-in or roll-through cabinets and pass through cabinets.

“Refrigerating bottled or canned beverage vending machine” means a commercial refrigerator that cools bottled or canned beverages and dispenses them upon payment.

“Refrigerator” means a cabinet that is designed for the refrigerated storage of food, including but not limited to solid food and wine, beer, and other beverages, at temperatures above 32° F, and that has a source of refrigeration requiring an energy input. It may include a compartment for the freezing and storage of food at temperatures below 32° F, but it does not provide a separate low temperature compartment designed for the freezing and storage of food at temperatures below 8° F.

“Refrigerator compartment” means a compartment designed for the refrigerated storage of food, at temperatures above 32° F.

“Refrigerator volume” means fresh food compartment volume as defined in [ANSI/AHAM-~~HRF-1-1979~~HRF1-1988](#).

“Refrigerator-freezer” means a cabinet that (1) consists of two or more compartments with at least one of the compartments designed for the refrigerated storage of food, including but not limited to solid food and wine, beer, and other beverages, at temperatures above 32° F; (2) has at least one of the compartments designed for the freezing and storage of food or ice at temperatures below 8° F that may be adjusted by the user to a temperature of 0° F or below; and (3) has a source of refrigeration requiring an energy input.

“Remote freezer” means a freezer that (1) receives refrigerant fluid from a condensing unit located externally to its cabinet assembly; and (2) is capable of being purchased and installed with different types of compressor or condenser, so that its efficiency depends on the type of compressor or condenser applied by the purchaser, installer, or user.

“Remote refrigerator” means a refrigerator that (1) receives refrigerant fluid from a condensing unit located externally to its cabinet assembly; and (2) is capable of being purchased and installed with different types of compressor or condenser, so that its efficiency depends on the type of compressor or condenser applied by the purchaser, installer, or user.

“Remote refrigerator-freezer” means a refrigerator-freezer that (1) receives refrigerant fluid from a condensing unit located externally to its cabinet assembly; and (2) is capable of being purchased and installed with different types of compressor or condenser, so that its efficiency depends on the type of compressor or condenser applied by the purchaser, installer, or user.

“Roll-in or roll-through cabinet” means a commercial refrigerator or commercial freezer that allows wheeled racks of product to be rolled into or through the refrigerator or freezer.

“Standard vendible capacity” means the maximum quantity of standard product that can be dispensed from one full loading of ~~the~~ [a refrigerating bottled or canned beverage](#) vending machine without further reload operations when used as recommended by the manufacturer.

“Total volume” means the sum of refrigerator volume and freezer volume.

“Undercounter cabinet” means a reach-in cabinet commercial refrigerator or reach-in cabinet commercial freezer that has no worktop surface and that is intended for installation under a separate counter.

“Upright freezer” means a freezer to which access is gained through a side-opening door.

“Wine chiller” means a refrigerator designed for the cooling and storage of wine.

“Worktop table” means a counter-height commercial refrigerator with a worktop surface.

**(c) Air Conditioners.**

“Air conditioner” means an appliance that supplies cooled air to a space for the purpose of cooling



objects within the space.

“Air-cooled air conditioner” means an air conditioner using an air-cooled condenser.

“Air source heat pump” means an appliance that consists of one or more factory-made assemblies, that includes an indoor conditioning coil, a compressor, and a refrigerant-to-air heat exchanger, and that provides heating and cooling functions.

“Casement-only room air conditioner” means a room air conditioner with an encased assembly designed for mounting in a casement window with a width of 14.8 inches or less and a height of 11.2 inches or less.

“Casement-slider room air conditioner” means a room air conditioner with an encased assembly designed for mounting in a sliding or casement window with a width of 15.5 inches or less.

“Casement window” means a window that opens on hinges at the side.

“Central air conditioner” means an air-conditioner that is capable of cooling only by refrigeration and is not a room air conditioner or a packaged terminal air conditioner.

“Central air-conditioning heat pump” means a central air conditioner that is capable of cooling and heating by refrigeration.

“Coefficient of performance (COP)” of a heat pump means the ratio of the rate of useful heat output delivered by the complete heat pump unit (exclusive of supplementary heating) to the corresponding rate of energy input, in consistent units and as determined using the applicable test method in Section 1604(b) or 1604(c).

“Compressor motor nominal horsepower” means the horsepower of a compressor motor as listed on the compressor motor's nameplate.

“Compressor power” means the rate of electrical consumption of a compressor, in watts.

“Computer-room air conditioner” means a central air conditioner specifically designed for use in data processing areas, maintaining an ambient temperature of approximately 72° F and a relative humidity of approximately 52 percent.

“Cooling capacity” means a measure of the ability of an air conditioner to remove heat from an enclosed space, as determined using the applicable test method in Section 1604(b) or 1604(c).

“db” means dry bulb.

“Energy efficiency ratio (EER)” means the cooling capacity of an air conditioner in Btu per hour divided by the total electrical input in watts, as determined using the applicable test method in Section 1604(b) or 1604(c).

“Evaporatively-cooled air conditioner” means an air conditioner whose refrigerating system has an evaporatively-cooled condenser.

“Gas-fired air-conditioner” means an air conditioner which utilizes gas as the primary fuel..

“Gas-fired heat pump” means a heat pump which utilizes gas as the primary fuel.

“Ground source closed-loop heat pump” means an appliance that (1) consists of one or more factory-made assemblies; (2) includes an indoor conditioning coil with air moving means, a compressor, and a refrigerant-to-ground heat exchanger; and (3) provides heating, cooling, or heating and cooling functions.

“Ground water-source heat pump” means an appliance that (1) consists of one or more factory-made assemblies; (2) includes an indoor conditioning coil with air moving means, a compressor, and a refrigerant-to-water heat exchanger; and (3) provides heating, cooling, or heating and cooling functions.

“Heat pump” means an appliance, other than a packaged terminal heat pump, that consists of one or more assemblies; that uses an indoor conditioning coil, a compressor, and a refrigerant-to-outdoor air heat exchanger to provide air heating; and that may also provide air cooling, dehumidifying, humidifying, circulating, or air cleaning.

“Heating seasonal performance factor (HSPF)” means the total heating output of a central air-conditioning heat pump during its normal usage period for heating, divided by the total electrical energy input in watt-hours during the same period, as determined using the applicable test method in Section 1604(c).

“Indoor fan electrical input” means the electrical input required for the operation of an indoor fan, in watts.

“Indoor fan motor nominal horsepower” means the horsepower of an indoor fan motor as listed on the fan motor’s nameplate.

“Indoor fan motor type” means the internal construction design of a motor.

“Integrated part load value (IPLV)” means part load efficiency, as determined using the applicable test method in Section 1604(c).

“Outdoor fan electrical input” means the ~~the~~ electrical input required for the operation of an outdoor fan, in watts.

“Outdoor fan motor nominal horsepower” means the horsepower of an outdoor fan motor as listed on the fan motor's nameplate.

“Packaged terminal air conditioner” means a wall sleeve and a separate unencased combination of heating and cooling assemblies that (1) is intended for mounting through the wall and (2) includes a prime source of refrigeration, separable outdoor louvers, forced ventilation, and heating availability by hot water, steam, or electric resistance heat.

“Packaged terminal heat pump” means a packaged terminal air conditioner that uses reverse cycle refrigeration as its prime heat source and that has a supplementary heat source of hot water, steam, or electric resistance heat.

“Premium motor” means a premium motor as defined in *NEMA Premium™: Product Scope and Nominal Efficiency Levels (2001)*.

“Room air conditioner” means a factory-encased air conditioner that is designed (1) as a unit for mounting in a window, through a wall, or as a console, and (2) for delivery without ducts of conditioned air to an enclosed space.

“Room air-conditioning heat pump” means a room air conditioner that is capable of heating by refrigeration.

“Seasonal energy efficiency ratio (SEER)” means the total cooling output of an air-cooled central air conditioner during its normal annual usage period for cooling, divided by the total electrical energy input in watt-hours during the same period, as determined using the applicable test method in Section 1604(c).

“Single package central air conditioner” means a central air conditioner in which all the major assemblies are enclosed in one cabinet.

“Single package heat pump” means a heat pump in which all the major assemblies are enclosed in one cabinet.

“Space constrained product” means a central air conditioner or heat pump: (1) that has a rated cooling capacity no greater than 30,000 Btu/hr; (2) that has an outdoor or indoor unit having at least two overall exterior dimensions or an overall displacement that: (i) are substantially smaller than those of other units that are (A) currently usually installed in site-built single family homes, and (B) of a similar cooling, and, if a heat pump, heating, capacity, and (ii) if increased, would certainly result in a considerable increase in the usual cost of installation or would certainly result in a significant loss in the utility of the product to the consumer; and (3) is a product type that was available for purchase in the United States as of December 1, 2000.

“Split system central air conditioner” means a central air conditioner in which one or more of the major assemblies are separate from the others.

“Split system heat pump” means a unitary heat pump in which one or more of the major assemblies are separate from the others in a central air conditioner or a central air conditioning heat pump.

“Standard motor” in a central air conditioner or a central air-conditioning heat pump means a motor that is not a premium motor.

“Thermostatic expansion valve (TXV)” means a refrigerant metering valve, installed in an air conditioner or heat pump, which controls the flow of liquid refrigerant entering the evaporator in response to the super heat of the gas leaving it.

“Unitary air conditioner” means a central air conditioner consisting of one or more factory-made assemblies that include an evaporator or cooling coil and an electrically-driven compressor and condenser combination.

“Unitary heat pump” means a central air conditioning heat pump that consists of one or more factory-made assemblies, including an indoor conditioning coil, a compressor, and an outdoor coil, that provides a heating function, and that may provide a cooling function.

“Water-cooled air conditioner” means an air conditioner whose refrigerating system has a water-cooled condenser.

“Water-source heat pump” means an appliance that (1) consists of one or more factory-made assemblies; (2) includes an indoor conditioning coil, a compressor, and a refrigerant-to-water heat exchanger; and (3) provides heating and cooling functions.

“wb” means wet bulb.

“Year-round air conditioner” means an appliance that contains an air conditioner and a furnace in the same cabinet.

**(d) Spot Air Conditioners.**

“Cooling efficiency ratio (CER)” means the efficiency of a spot air conditioner obtained by dividing the sum of the cooling capacity and the fan electrical input, both in Btu per hour by the total electrical input in watts, all as determined using the test method specified in Section 1604(d).

“Spot air conditioner” means an air conditioner that discharges cool air into a space and discharges rejected heat back into that space, where there is no physical boundary separating the discharges.

**(e) Gas and Oil Space Heaters.**

“Annual fuel utilization efficiency (AFUE)” of a space heater means a measure of the percentage of heat from the combustion of gas or oil that is transferred to the space being heated during a year, as determined using the applicable test method in Section 1604(e).

“Boiler” means a space heater that is a self-contained appliance for supplying steam or hot water primarily intended for space-heating. “Boiler” does not include hot water supply boilers.

“Central furnace” means a self-contained space heater designed to supply heated air through ducts of more than 10 inches length.

“Combination space-heating and water-heating appliance” means an appliance that is designed to provide both space heating and water heating from a single primary energy source.

“Combined annual efficiency (CAE)” means  $(SHF \times \text{Eff}_{hs}/100) + (WHF \times \text{Eff}_{ss}/100) + (R \times NHF \times EF)/SHF + WHF + (R \times NHF)$  as defined in [the](#) applicable test method [in Section 1604\(e\)\(3\)](#).

“Combustion efficiency of a space heater” means a measure of the percentage of heat from the combustion of gas or oil that is transferred to the space being heated or lost as jacket loss, as determined using the applicable test method in Section 1604(e).

“Duct furnace” means a space heater designed to be installed within a duct.

“Energy consumption during standby” means the energy consumed by a gas or oil space heater when the main burner is not operating, not including energy consumption related to associated cooling equipment, and reported in watts, based on a conversion factor of 3.412 Btu per watt-hour.

“Fan type gas space heater” means a space heater in which heat is distributed to the surrounding area through the use of an electric fan.

“Floor furnace” means a self-contained, floor-mounted space heater without ducts.

“Floor-mounted unit heater” means a unit heater designed for mounting on the floor rather than suspension mounting.

“Gravity type gas space heater” means a gas space heater in which heat is distributed to the surrounding area as a result of the differences in densities of cooler and warmer air in the surrounding atmosphere.

“High intensity infrared heater” means an infrared gas space heater that has a radiating surface that operates at or above 1,350° F.

“High static unit heater” means a unit heater that has an integral means for the circulation of air against 0.2 inch or greater static pressure.

“Indoor duct furnace” means a duct furnace designed to operate under sheltered conditions.

“Infrared gas space heater” means a gas space heater that directs a substantial amount of its energy output in the form of infrared energy into the area to be heated.

“Low intensity infrared heater” means an infrared gas space heater that has a radiating surface that operates at less than 1,350° F.

“Low static unit heater” means a unit heater that has an integral means for the circulation of air against less than 0.2 inch static pressure.

“Non-packaged boiler” means a boiler that is not a packaged boiler.

“Outdoor duct furnace” means a duct furnace designed to function normally under varying outdoor weather conditions.

“Output” means the rate of useful heat output when operating under steady state conditions.

“Packaged boiler” means a boiler that is shipped complete with heating equipment, mechanical draft equipment, and automatic controls; including factory-built boilers, manufactured as a unit or system, disassembled for shipment, and reassembled at the site.

“Patio heater” means an infrared gas space heater that is designed for warming outdoor areas using radiant heat.

“Portable infrared heater” means a free-standing infrared gas space heater designed with the intent of being moved from one space to another.

“Premium motor” means a premium motor as defined in *NEMA Premium™: Product Scope and Nominal Efficiency Levels (2001)*.

“Radiant coefficient” means a measure of efficiency of an infrared heater, as determined using the applicable test method in Section 1604(e).

“Radiant tube-type infrared heater” means a low-intensity infrared gas space heater in which combustion takes place within a tube.

“Room heater” means a free-standing non-recessed space heater.

“Space heater” means an appliance that supplies heat to a space for the purpose of providing warmth to objects within the space.

“Standard motor” of a central gas furnace means a motor that is not a premium motor.

“Standby loss” of a boiler means the sum of the gas used by the pilot (converted to watts), the electricity used by controls, and any other energy used while the boiler is not operating.

“Steam boiler” means a boiler that supplies steam.

“Thermal efficiency” of a space heater means a measure of the percentage of heat from the combustion of gas or oil that is transferred to the space being heated, or in the case of a boiler, to the hot water or steam, as determined using the applicable test methods in Section 1604(e).

“Unit heater” means a self-contained, automatically-controlled, vented fan-type gas space heater designed to be installed without ducts, within the heated space.

“Unvented gas space heater” means a gas space heater designed to be used without a vent.

“Unvented oil space heater” means an oil space heater designed to be used without a vent.

***Note: See Health and Safety Code Section 19881 for restrictions on the sale of unvented gas ~~and oil~~ space heaters and unvented oil space heaters.***

“Vented gas space heater” means a gas space heater designed to be used with a vent.

“Vented oil space heater” means an oil space heater designed to be used with a vent.

“Wall furnace” means a wall-mounted, self-contained space heater without ducts that exceed 10 inches.

“Water boiler” means a boiler that supplies hot water.

(f) **Water Heaters.**

“Booster water heater” means a water heater that raises the temperature of the preheated water supplied to the unit typically from 110° F - 140° F to 180° F - 195° F.

“Energy factor” of a water heater means a measure of overall water heater efficiency, as determined using the applicable test method in Section 1604(f).

“Energy input rate” of a booster water heater means the peak rate at which a booster water heater consumes energy, expressed in Btu/hr or kW.

“Heat pump water heater” means a device using the vapor compression cycle to transfer heat from a low-temperature source to a higher temperature sink for the purpose of heating water, including all necessary ancillary equipment, fans, blowers, pumps, storage tanks, piping, and controls.

“Hot water dispenser” means a small electric water heater ~~whose input is no greater than 1.5 kW and~~ that has a measured storage volume no greater than ~~0.5~~ 1.0 gallon.

“Hot water supply boiler” means an appliance for supplying hot water for purposes other than space heating or pool heating.

“Input” means rate of energy consumption.

“Instantaneous water heater” means a water heater that has an input rating of at least 4,000 Btu per hour per gallon of stored water.

“Large water heater” means a water heater that is not a small water heater.

“Mini-tank electric water heater” means a small electric water heater that has ~~an input no greater than 1.5 kW and~~ a measured storage volume more than ~~0.5~~ 1.0 gallon but no more than 20 gallons.

“Recovery efficiency” of a water heater means the ratio of energy delivered to the water to the energy content of the fuel consumed by the water heater, as determined using the applicable test method in Section 1604(f).

“Small water heater” means a water heater that is a gas storage water heater with an input of 75,000 Btu per hour or less, an oil storage water heater with an input of 105,000 Btu per hour or less, an electric storage water heater with an input of 12 ~~kilowatts~~ kW or less, a gas instantaneous water heater with an input of 200,000 Btu per hour or less, an oil instantaneous water heater with an input of 210,000 Btu per hour or less, an electric instantaneous water heater with an input of 12 ~~kilowatts~~ kW or less, or a heat pump water heater rated at 24 amps or less.

“Storage water heater” means a water heater that heats and stores water within the appliance at a thermostatically-controlled temperature for delivery on demand, and that has an input less than 4,000 Btu per hour per gallon of stored water.

“Tabletop water heater” means a water heater in a rectangular box enclosure designed to slide into a kitchen countertop space with typical dimensions of 36 inches high, 25 inches deep, and 24 inches wide.

“Thermal efficiency” of a water heater means a measure of the percentage of heat from the combustion of gas or oil that is transferred to the water, as determined using the applicable test method in Section 1604(f).

“Water heater” means an appliance for supplying hot water for purposes other than space heating or pool heating.



**(g) Pool Heaters.**

“Coefficient of performance (COP)” of a heat pump pool heater means the ratio of heat output to the total power input in consistent units, as determined using the applicable test method in Section 1604(g).

“Heat pump pool heater” means an air-to-water heat pump pool heater, employing a compressor, water-cooled condenser, and outdoor air coil in a single package assembly.

“Low temperature rating” means the conditions described as “low temperature rating” in Table G of Section 1604(g).

“Pool heater” means an appliance designed for heating non-potable water contained at atmospheric pressure for swimming pools, spas, hot tubs and similar applications.

“Readily accessible on-off switch” of a pool heater means an on-off switch located in a place that can be easily used without the need for tools to remove any covering when the pool heater is on display in a store or when it is installed.

“Spa conditions rating” means the conditions described as “spa conditions rating” in Table G of Section 1604(g).

“Standard temperature rating” means the conditions described as “standard temperature rating” in Table G of Section 1604(g).

“Thermal efficiency” of a pool heater means a measure of the percentage of heat from the input that is transferred to the water, as determined using the applicable test method in Section 1604(g).

**(h) Plumbing Fittings.**

“Flow rate” means the rate of water flow of a plumbing fitting, as determined using the applicable test method in Section 1604(h).

~~“gpm” means gallons per minute.~~

“Kitchen faucet” means a faucet designed for discharge into a kitchen sink.

“Kitchen replacement aerator” means an aerator sold as a replacement, separate from the kitchen faucet to which it is intended to be attached.

“Lavatory” means a basin or bowl designed for washing the face and hands.

“Lavatory faucet” means a plumbing fitting designed for discharge into a lavatory.

“Lavatory replacement aerator” means an aerator sold as a replacement, separate from the lavatory faucet to which it is intended to be attached.

“Leakage rate” means the rate of leakage through a tub spout diverter directly into the bathtub when the diverter is in the diverting position, as determined using the applicable test method in Section 1604(h).

“Lift-type tub spout diverter” means a tub spout diverter that is operated by lifting the control.

“Metering faucet” means a faucet that, when turned on, will gradually shut itself off over a period of several seconds.

“Plumbing fitting” means a showerhead, lavatory faucet, kitchen faucet, metering faucet, lavatory replacement aerator, kitchen replacement aerator, wash fountain, or tub spout diverter.

“Private brand packager” of plumbing fittings means any person that buys plumbing fittings from a manufacturer, packages them using its own brand name, and distributes them for sale using its own brand name.

“psi” means pounds per square inch.

“Pull-type tub spout diverter” means a tub spout diverter that is operated by pulling the control.

“Push-type tub spout diverter” means a tub spout diverter that is operated by pushing the control.

“Reassembler” of plumbing fittings means any person that buys plumbing fittings from a manufacturer, modifies them, and distributes them for sale using its own brand name.

“Showerhead” means a device through which water is discharged for a shower bath.

“Showerhead-tub spout diverter combination” means a group of plumbing fittings sold as a matched set and consisting of a control valve, a tub spout diverter, and a showerhead.

“Tub spout diverter” means a device designed to stop the flow of water into a bathtub and to divert it so that the water discharges through a showerhead.

“Turn-type tub spout diverter” means a tub spout diverter that is operated by turning the control.

“Wash fountain” means a lavatory faucet designed for simultaneous use by two or more persons.

(i) **Plumbing Fixtures.**

“Blowout type bowl” means a nonsiphonic type water closet bowl that is designed for a blowout action, and that has an integral flushing rim, a trapway at the rear of the bowl, a visible or concealed jet, a wall outlet, and, if wall mounted, a three bolt hole configuration.

“Blowout water closet” means a water closet with a blowout type bowl.

“Electromechanical hydraulic water closet” means a water closet that incorporates an electric motor, pump, and controller to facilitate the flushing action.

“Flushometer tank” means a flushometer valve that is integrated within an accumulator vessel affixed and adjacent to a plumbing fixture inlet so as to cause an effective enlargement of the supply line immediately before the fixture.

“Flushometer tank water closet” means a water closet utilizing a flushometer tank.

“Flushometer valve” means a valve that is attached to a pressurized water supply pipe and that is designed so that when actuated it opens the line for direct flow into the fixture at a rate and predetermined quantity to properly operate the fixture, and then gradually closes in order to provide trap reseal in the fixture and to avoid water hammer. The pipe to which the device is connected is, in itself, of sufficient size that when open shall allow the device to deliver water at a sufficient rate of flow for flushing purposes.

“Gallons per flush (gpf)” means gallons per flush as determined using the applicable test method in Section 1604(i).

“Gravity tank-type water closet” means a water closet that includes a storage tank from which water flows into the bowl by gravity.

[“Plumbing fixture” means a water closet or a urinal.](#)

“Prison-type urinal” means a urinal designed and marketed expressly for use in prison-type institutions.

“Prison-type water closet” means a water closet designed and marketed expressly for use in prison-type institutions.

“Trough-type urinal” means a urinal designed for simultaneous use by two or more persons.

“Urinal” means a plumbing fixture that receives only liquid body waste and, on demand, conveys the waste through a trap seal into a gravity drainage system.

“Vacuum-type urinal” means a urinal whose bowl is evacuated by the application of a vacuum.

“Vacuum-type water closet” means a water closet whose bowl is evacuated by the application of a vacuum.

“Water closet” means a plumbing fixture having a water-containing receptor that receives liquid and solid body waste through an exposed integral trap into a gravity drainage system.

“Waterless urinal” means a urinal designed to be used without the application of water for flushing.

(j) **Fluorescent Lamp Ballasts.**

“Ballast efficacy factor” means the ratio of the relative light output to the power input of a fluorescent lamp ballast, as determined using the applicable test method in Section 1604(j).

“Cathode heater cut-out circuit design” or “Cathode cut-out circuit design” means a fluorescent lamp ballast design that incorporates a cathode heater cutout device that turns off the cathode heaters in fluorescent lamps once the lamps are ignited and operating.

“Continuous dimming ballast” means a fluorescent lamp ballast that can ~~linearly~~ continuously vary lamp light levels. |

“Electronic circuit design” means the type of circuit used in an electronic fluorescent lamp ballast.

“Fluorescent lamp ballast” means a device that is used to start and operate fluorescent lamps by providing a starting voltage and current and limiting the current during normal operation.

“F40T12 lamp” means a tubular fluorescent lamp that is a nominal 40 watt lamp, has a 48 inch tube length, is 1½ inches in diameter, and conforms to ANSI C78.1-1991 (R1996).

“F96T12 lamp” means a tubular fluorescent lamp that is a nominal 75 watt lamp, has a 96 inch tube length, is 1½ inches in diameter, and conforms to ANSI C78.3-1991 (R1996).

“F96T12HO lamp” means a tubular fluorescent lamp that is a nominal 110 watt lamp, has a 96 inch tube length, and is 1½ inches in diameter.

“Instant start ballast” or “slimline instant start ballast” means a fluorescent lamp ballast that allows for instantaneous light production without the use of a starter circuit.

“Luminaire” means a complete lighting unit consisting of a lamp or lamps together with the parts designed to distribute the light, to position and protect the lamps and to connect the lamps to the power supply.

“Magnetic circuit design” means a fluorescent lamp ballast design that uses a magnetic core and coil and that alters the voltage and current, but not the frequency, to the lamp.

“Power factor” of a fluorescent lamp ballast means the ratio of the real power component to the total (complex) power component.

“Power input” means the power consumption in watts of a ballast and its associated fluorescent lamp or lamps, as determined using the applicable test method in Section 1604(j).

“Rapid start ballast” means a fluorescent lamp ballast design that uses a starter circuit to heat the cathodes before and during operation.

“Relative light output” means the light output delivered through the use of a ballast divided by the light output delivered through the use of a reference ballast, expressed as a percent, as determined using the applicable test method in Section 1604(j).

“Replacement ballast” means a ballast that: (1) is manufactured on or before June 30, 2010; (2) is designed for use to replace an existing ballast in a previously installed luminaire; (3) is marked “FOR REPLACEMENT USE ONLY”; (4) is shipped by the manufacturer in packages containing

not more than 10 ballasts; and (5) has output leads that when fully extended are a total length that is less than the length of the lamp with which they are intended to be operated.

“Stepped dimming ballast” ~~or “Multilevel ballast”~~ means a fluorescent lamp ballast that can operate lamps at two or more light output steps.

“T5 lamp” means a tubular fluorescent lamp 5/8 inches in diameter.

“T8 lamp” means a tubular fluorescent lamp 8/8 or 1 inch in diameter.

“T12 lamp” means a tubular fluorescent lamp 12/8 or 1-1/2 inches in diameter.

**(k) Lamps.**

“Average lamp efficacy (LPW)” means the lamp efficacy of fluorescent lamps or incandescent reflector lamps, expressed in lumens per watt, as determined using the applicable test method in Section 1604(k).

“Bi-pin lamp” means a lamp having a base with two pins that is used for tungsten-halogen reflector lamps, low-voltage tungsten-halogen lamps, or fluorescent lamps.

“Color rendering index (CRI)” means the measured degree of color shift objects undergo when illuminated by a light source as compared with the color of those same objects when illuminated by a reference source of comparable color temperature, as determined using the applicable test method in Section 1604(k).

“Fluorescent lamp” means a glass tube coated on the inside with a substance that emits light when mercury vapor in the tube is acted upon by an electric charge.

“General service fluorescent lamp” means any fluorescent lamp which can be used to satisfy the majority of fluorescent lighting applications, but does not include any lamp designed and marketed for the following non-general applications: (1) fluorescent lamps designed to promote plant growth; (2) fluorescent lamps specifically designed for cold temperature applications; (3) colored fluorescent lamps; (4) impact-resistant fluorescent lamps; (5) reflectorized or aperture fluorescent lamps; (6) fluorescent lamps designed for use in reprographic equipment; (7) fluorescent lamps primarily designed to produce radiation in the ultra-violet region of the spectrum; or (8) fluorescent lamps with a CRI of 82 or greater.

“Incandescent lamp” means a glass enclosure in which light is produced by a filament of conducting material contained in a vacuum and heated by an electric current.

“Incandescent reflector lamp” (commonly referred to as a reflector lamp) means any lamp in which light is produced by a filament heated to incandescence by an electric current, that: (1) is not colored or designed for rough or vibration service applications; (2) contains an inner reflective coating on the outer bulb to direct the light; (3) has an R, PAR, or similar bulb shape (excluding ER or BR) with an E26 medium screw base; (4) has a rated voltage or voltage range that lies at least partially in the range of 115 and 130 volts; (5) has a diameter that exceeds 2.75 inches; and

(6) is either a low(er)-wattage reflector lamp that has a rated wattage between 40 and 205, or a high(er)-wattage reflector lamp that has a rated wattage above 205.

“Lamp” means a fluorescent lamp or an incandescent lamp.

“Nominal lamp wattage” means the lamp wattage stated by the manufacturer on the lamp and on any accompanying documents or packaging.

“Slimline lamp” means a fluorescent lamp designed for use with a slimline instant start ballast.

“U-shaped lamp” means a fluorescent lamp with the tube bent in the middle so that the ends fit into the same side of a luminaire.

## (I) **Emergency Lighting**

“Average Luminance” means the arithmetic mean of all points measured on a surface.

“Edge-lit exit sign” means an illuminated exit sign in which lettering etched into a glass, plastic, or similar panel is illuminated through the edge of the panel and in which the lettering and the background are luminous.

“Electroluminescent light source” means a solid-state device which produces light when an electric current is passed through a phosphor-impregnated material.

“Face” means an instructional surface on an illuminated exit sign.

“Illuminated exit sign” means a sign that:

- (1) is designed to be permanently fixed in place to identify an exit; and
- (2) consists of:
  - (A) an electrically powered integral light source that illuminates the legend “EXIT” and any directional indicators; and
  - (B) provides contrast between the legend, any directional indicators, and the background.

“Input power” means the rate of electricity consumption, in watts, of an illuminated exit sign.

~~“Electroluminescent Light Source” means a solid-state device which produces light when an electric current is passed through a phosphor-impregnated material.~~

“Light emitting diode (LED)” means a semiconductor diode that emits light when an electric current is applied.

“Luminance” means a measure of the brightness of a luminous surface.

“Luminance contrast” means the relative brightness of an object against its background.

“Matrix illuminated exit sign” means an illuminated exit sign that uses an array of small light sources, such as LEDs, to form the lettering of a sign.

~~“Luminance uniformity”~~ “Maximum to minimum luminance ratio” means the ~~ratio~~<sup>ratio</sup> of maximum to minimum luminance where the luminance should be uniform.

“Panel-type exit sign” means an illuminated exit sign in which a translucent panel diffuses a light source and in which both the lettering and background are luminous.

“Photometric measurements” means the measurements of luminance levels made on the face of the sign.

“Stencil illuminated exit sign” means an illuminated exit sign in which an opaque panel conceals the light source and in which only translucent lettering is luminous.

(m) **Traffic Signal Modules and Traffic Signal Lamps.**

“Light emitting diode (LED)” means a semiconductor diode that emits light when an electric current is applied.

“Power consumption” means the power consumption, in watts, of a traffic signal module or a traffic signal lamp.

“Traffic signal lamp” means a lamp that is designed with lifetime, wattage, focal length, filament configuration, mounting, lamp glass, and lamp base characteristics appropriate for use in traffic signals.

“Traffic signal module” means a traffic signal that is a standard 8-inch (200 mm) or 12-inch (300 mm) round traffic signal indication; consists of a light source, a lens, a lamp, and all other parts necessary for operation; and communicates stop, start, caution, lane control, and turning messages to drivers in red, amber, green, or similar colors.

(n) **Luminaires**

“Torchiere” means a portable electric lighting fixture with a reflector bowl giving light directed upward so as to give indirect illumination.

(o) **Dishwashers.**

“Compact dishwasher” means a dishwasher of less than 22 inches in exterior width.

“Cycle” means a sequence of operations of a dishwasher that performs a complete dishwashing operation, and that may include variations or combinations of the functions of washing, rinsing, and drying.

“Dishwasher” means a cabinet-like appliance that with the aid of water and detergent, washes, rinses, and dries (when a drying process is included) dishware, glassware, eating utensils, and cooking utensils by chemical, mechanical, or electrical means, and discharges to a plumbing drainage system.

“Energy factor” of a dishwasher means cycles per kWh, as determined using the applicable test method in Section 1604(o).

“Standard dishwasher” means a dishwasher of 22 inches or more in exterior width.

“Truncated normal cycle” means the normal cycle interrupted to eliminate the power-dry feature after the termination of the last rinse option.

“Water heating dishwasher” means a dishwasher which is designed for heating cold inlet water (nominal 50° F) or a dishwasher for which the manufacturer recommends operation with a nominal inlet water temperature of 120° F, and may operate at either of these inlet water temperatures by providing internal water heating to above 120° F in at least one phase of the normal cycle.

**(p) Clothes Washers.**

“Automatic clothes washer” means a clothes washer that has a control system that is capable of scheduling a pre-selected combination of operations, such as regulation of water temperature, regulation of the water fill level, and performance of wash, rinse, drain, and spin functions without the need for user intervention subsequent to the initiation of machine operation. Some models may require user intervention to initiate these different segments of the cycle after the machine has begun operation, but they do not require the user to intervene to regulate the water temperature by adjusting the external water faucet valves.

“Clothes washer” means an appliance designed to clean clothes, utilizing a water solution of soap or detergent and mechanical agitation or other movement.

“Commercial clothes washer” means a soft mount front-loading or soft mount top-loading clothes washer with clothes container compartment no greater than 3.5 ft<sup>3</sup> for horizontal-axis clothes washers, or no greater than 4.0 ft<sup>3</sup> for vertical-axis clothes washers, that is designed for use in (1) applications where the occupants of more than one household will be using it, such as multi-family housing common areas and coin laundries; or (2) other commercial applications.

“Compact clothes washer” means a clothes washer of less than 1.6 ft<sup>3</sup> in clothes container compartment capacity.

“Cycle” means a sequence of operations of a clothes washer that performs a complete washing operation.

“Energy factor” of a clothes washer means ft<sup>3</sup> per kWh per cycle, as determined using the applicable test method in Section 1604(p).

“Front-loading clothes washer” means a clothes washer with the clothes container compartment access located on the front of the machine.



“Modified energy factor (MEF)” of a clothes washer means the quotient of the ft<sup>3</sup> capacity of the clothes container divided by the total clothes washer energy consumption per cycle, with such energy consumption expressed as the sum of the machine electrical energy consumption, the hot water energy consumption, and the energy required for removal of the remaining moisture in the wash load, as determined using the applicable test method in Section 1604(p).

“Semi-automatic clothes washer” means a clothes washer that is the same as an automatic clothes washer except that user intervention is required to regulate the water temperature by adjusting the external water faucet valves.

“Soft mount clothes washer” means a clothes washer that does not require mechanical fastening to a floor for proper operating performance under typical commercial clothes washer applications.

“Standard clothes washer” means a clothes washer of 1.6 ft<sup>3</sup> or more in clothes container compartment capacity.

“Suds-saving” means a feature or option on a clothes washer which allows the user to store used wash water in an external laundry tub for use with subsequent wash loads.

“Top-loading clothes washer” means a clothes washer with the clothes container compartment access located on the top of the machine.

“Water factor” means the quotient of the total weighted per-cycle water consumption divided by the capacity of the clothes washer, determined using the applicable test method in [Section 1604\(p\)](#).

**(q) Clothes Dryers.**

“Automatic termination control” means a dryer control system with a sensor which monitors either the dryer load temperature or its moisture content and with a controller which automatically terminates the drying process. A mark or detent which indicates a preferred automatic termination control setting must be present if the dryer is to be classified as having an “automatic termination control”.

“Clothes dryer” means a cabinet-like appliance that is designed to dry fabrics in a tumble-type drum with forced air circulation and that has a drum and a blower driven by an electric motor.

“Compact clothes dryer” means a clothes dryer with a drum capacity less than 4.4 ft<sup>3</sup>.

“Electric clothes dryer” means a clothes dryer whose heat source is electricity.

“Energy factor” of a clothes dryer means pounds of clothes dried per kWh, as determined using the applicable test method in Section 1604(q).

“Gas clothes dryer” means a clothes dryer whose heat source is gas and the drum and blower(s) are driven by an electric motor(s).

“Standard clothes dryer” means a clothes dryer with a drum capacity of 4.4 ft<sup>3</sup> or greater.

(r) **Cooking Products and Food Service Equipment.**

“Commercial convection oven” means an appliance that is not a consumer product and that is designed for cooking food by forcing hot air over it using a fan in a closed cavity.

“Commercial hot food holding cabinet” means an appliance that is not a consumer product and that is designed to hold hot food that has been cooked in a separate appliance, at a specified temperature.

“Commercial range top” means an appliance that is not a consumer product and that is designed for cooking food by direct or indirect heat transfer from one or more cooking units to one or more cooking containers.

“Cooking products” means consumer products that are used as the major household cooking appliances. They are designed to cook or heat different types of food by one or more of the following sources of heat: gas, electricity, or microwave energy. Each product may consist of a horizontal cooking top containing one or more surface units ~~and~~/or one or more heating compartments. They must be one of the following classes: conventional ranges, conventional cooking tops, conventional ovens, microwave ovens, microwave/conventional ranges, and other cooking products.

“Food service equipment” means a commercial hot food holding cabinet, a commercial convection oven, or a commercial range top.

(s) **Electric Motors.**

“Closed motor” means an enclosed motor.

“Definite purpose motor” means any motor designed in standard ratings with standard operating characteristics or standard mechanical construction for use under service conditions other than usual or for use on a particular type of application and which cannot be used in most general purpose applications.

“Efficiency” of an electric motor means the ratio of an electric motor's useful power output to its total power input, expressed in percentage.

“Electric motor” has the meaning described in (1) - (3) immediately below:

- (1) “Electric motor” means a machine which converts electrical power into rotational mechanical power and which:
  - (i) is a general purpose motor including but not limited to motors with explosion-proof construction;
  - (ii) is a single speed, induction motor (MG1);
  - (iii) is rated for continuous duty (MG1) operation or is rated duty type S1 (IEC);

- (iv) contains a squirrel-cage (MG1) or cage (IEC) rotor and has foot-mounting, including foot-mounting with flanges or detachable feet;
  - (v) is built in accordance with NEMA T-frame dimensions (MG1) or IEC metric equivalents (IEC);
  - (vi) has performance in accordance with NEMA Design A (MG1) or B (MG1) characteristics or equivalent designs such as IEC Design N (IEC); and
  - (vii) operates on polyphase alternating current 60-Hertz sinusoidal power, and:
    - (A) is rated 230 volts or 460 volts, or both, including any motor that is rated at multi-voltages that include 230 volts or 460 volts, or
    - (B) can be operated on 230 volts or 460 volts, or both.
- (2) Terms in this definition followed by the parenthetical “MG1” must be construed with reference to provisions in NEMA Standards Publication MG1-1993, *Motors and Generators*, with Revisions 1, 2, 3, and 4, as follows:
- (i) Section I, *General Standards Applying to All Machines*, part 1, *Referenced Standards and Definitions*, paragraphs 1.16.1, 1.16.1.1, 1.17.1.1, 1.17.1.2, and 1.40.1 pertain to the terms “induction motor,” “squirrel-cage,” “NEMA Design A,” “NEMA Design B,” and “continuous duty” respectively;
  - (ii) Section 1, *General Standards Applying to All Machines*, Part 4, *Dimensions, Tolerances, and Mounting*, paragraph 4.01 and Figures 4-1, 4-2, 4-3, and 4-4 pertain to “NEMA T-frame dimensions;”
  - (iii) Section II, *Small (Fractional) and Medium (Integral) Machines*, Part 11, *Dimensions-AC and DC Small and Medium Machines*, paragraphs 11.01.2, 11.31 (except the lines for frames 447T, 447TS, 449T and 449TS), 11.32, 11.34 (except the line for frames 447TC and 449TC, and the line for frames 447TSC and 449TSC), 11.35, and 11.36 (except the line for frames 447TD and 449TD, and the line for frames 447TSD and 449TSD), and Table 11-1, pertain to “NEMA T-frame dimensions;” and
  - (iv) Section II, *Small (Fractional) and Medium (Integral) Machines*, Part 12, *Tests and Performance-AC and DC Motors*, paragraphs 12.35.1, 12.35.5, 12.38.1, 12.39.1, and 12.40.1, and Table 12-2, pertain both to “NEMA Design A” and “NEMA Design B.”
- (3) Terms in this definition followed by the parenthetical “IEC” must be construed with reference to provisions in IEC Standards as follows:
- (i) IEC Standard 60034-1 (1996), *Rotating Electrical Machines*, Part 1: *Rating and Performance*, with Amendment 1 (1997), Section 3: *Duty*, clause 3.2.1 and figure 1 pertain to “duty type S1”;

- (ii) IEC Standard 60050-411 (1996), *International Electrotechnical Vocabulary Chapter 411: Rotating Machines*, Sections 411-33-Q7 and 411-37-26, pertain to “cage”;
- (iii) IEC Standard 60072-1 (1991), *Dimensions and Output Series for Rotating Electrical Machines-Part 1: Frame Numbers 56 to 400 and Flange Numbers 55 to 1080*, clauses 2, 3, 4.1, 6.1, 7, and 10, and Tables 1, 2, and 4, pertain to “IEC metric equivalents” to “T-frame” dimensions; and
- (iv) IEC Standard 60034-12 (1980), *Rotating Electrical Machines, Part 12: Starting Performance of Single-Speed Three-Phase Cage Induction Motors for Voltages Up to and Including 660 V*, with Amendment 1 (1992) and Amendment 2 (1995), clauses 1, 2, 3.1, 4, 5, and 6, and Tables I, II, and III, pertain to “IEC Design N.”

“Enclosed motor” means an electric motor constructed so as to prevent the free exchange of air between the inside and outside of the case but not sufficiently closed to be termed airtight.

“General purpose motor” means any motor which is a general purpose T-frame, single-speed, foot-mounting, polyphase squirrel-cage induction motor of ~~the National Electrical Manufacturers Association~~ [NEMA](#), Design A and B, continuous rated, operating on 230/460 volts and constant 60 Hertz line power as defined in NEMA Standards Publication MG1-1987.

“IEC” means the International Electrotechnical Commission.

“Multi-voltage electric motor” means an electric motor that is capable of operating at (1) 230 volts and another voltage other than 460 volts, (2) 460 volts and at another voltage other than 230 volts, or (3) both 230 volts and 460 volts and another voltage.

“Nominal full load efficiency” means the average efficiency of a population of motors of duplicate design as determined in accordance with NEMA Standards Publication MG1-1987.

“Open motor” means a motor having ventilating openings which permit passage of external cooling air over and around the windings of the machine.

“Special purpose motor” means any motor, other than a general purpose motor or definite purpose motor, which has special operating characteristics or special mechanical construction, or both, designed for a particular application.

(t) **Distribution Transformers.**

“Autotransformer” means a transformer in which the primary and secondary windings are not electrically isolated, and with at least a portion of the secondary voltage derived from the primary winding.

“Distribution transformer” means a low voltage dry-type distribution transformer that is designed to operate on a frequency of 60 hertz and that has a rated power output of not less than 15 kVa.

“Drives transformer” means a transformer designed only to provide power to operate electronic variable speed motor drives.

“Efficiency of distribution transformer” means the ratio of power output to power input, expressed as a percent, as determined using the applicable test method in Section 1604(t).

“Grounding transformer” means a transformer designed only to provide a system ground reference point.

“Harmonic transformer” means a transformer that is designed to supply loads with higher than normal harmonic current levels and that has a K-rating of K-4 or greater.

“Impedance transformer” means a transformer that has a specified impedance less than 4 percent or greater than 8 percent.

“kVa” means kilovolt-ampere, which is the designation for the apparent power of a circuit.

“Low voltage dry-type distribution transformer” means a transformer that has an input voltage of 600 volts or less, that is air cooled, and that does not use oil as a coolant. “Low voltage dry-type distribution transformer” does not include autotransformers, drives transformers, grounding transformers, harmonic transformers, impedance transformers, machine tool transformers, rectifier transformers, regulating transformers, sealed and non-ventilating transformers, testing transformers, transformers with multiple voltage taps with the highest voltage tap more than ~~15~~20 percent greater than the lowest voltage tap, UPS transformers, and welding transformers.

“Machine tool transformer” means a transformer designed only to provide power to machine tool equipment.

“Rectifier transformer” means a transformer that is designed to provide power only to rectifier circuits, and that has nameplate ratings for both fundamental frequency power rating and RMS power rating.

“Regulating transformer” means a transformer with automatic tap changers.

“Sealed and non-ventilating transformer” means a transformer designed to prevent airflow through the transformer.

“Testing transformer” means a transformer designed only as part of, or to supply power to, electrical test equipment.

“Transformer” means an appliance that consists of two or more coils of insulated wire and that transfers alternating current by electromagnetic induction from one coil to another in order to change the original voltage, along with necessary accessories.

“UPS transformer” means a transformer designed only as an integral part of an uninterruptible power system.

“Welding transformer” means a transformer designed only to provide power to welding equipment.

The following standards are incorporated by reference in Section 1602.

***Number***

***Title***

**FEDERAL TEST METHODS**

CFR, Title 10, Section 430.23 (2001)

CFR, Title 10, Sections 431.23-431.28 (2001)

Copies available from:

Superintendent of Documents  
U.S. Government Printing Office  
Washington, DC 20402  
[www.access.gpo.gov/nara/cfr](http://www.access.gpo.gov/nara/cfr)

**AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)**

ANSI C78.1-1991 (R1996)      Dimensional and Electrical Characteristics of Fluorescent Lamps, Rapid Start Types

ANSI C78.3-1991 (R1996)      Dimensional and Electrical Characteristics of Fluorescent Lamps, Instant Start and cold Cathode Types

Copies available from:

American National Standards Institute  
 1819 L Street, NW, 6th Floor  
 Washington, DC 20036  
[www.ansi.org](http://www.ansi.org)  
 Phone: (202) 293-8020  
 FAX: (202) 293-9287

**~~AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)~~**

~~ANSI/ASHRAE 72-1998      Method of Testing Open Refrigerators~~

~~ANSI/ASHRAE 117-1992      Method of Testing Closed Refrigerators~~

~~Copies available from:~~

~~American Society of Heating, Refrigerating and  
 Air-Conditioning Engineers  
 791 Tullie Circle N.E.  
 Atlanta, GA 30329  
[www.ashrae.org](http://www.ashrae.org)  
 Phone: (800) 527-4723 (U.S./Canada) or (404) 636-8400  
 FAX: (404) 321-5478~~

**ASSOCIATION OF HOME APPLIANCES MANUFACTURERS (AHAM)**

| ANSI/AHAM ~~HRF-1-1979~~[HRF1-1988](#) Household Refrigerators, Combination Refrigerator-Freezers,  
and Household Freezers

Copies available from: Association of Home Appliance Manufacturers  
1111 19<sup>th</sup> Street, NW, Suite 402  
Washington, DC 20036  
[www.aham.org](http://www.aham.org)  
Phone: (202) 872-5955  
FAX: (202) 872-9354

**INTERNATIONAL ELECTROTECHNICAL COMMISSION (IEC)**

IEC 60034-1 (1996) Rotating Electrical Machines

IEC 60050-411 (1996) International Electrotechnical Vocabulary Chapter 411: Rotating  
Machines

| IEC 60072-1 (1991) Dimensions and Output Series for Rotating Electrical Machines-Part  
1: Frame Numbers 56 to ~~500~~[400](#) and Flange Numbers 55 to 1080

IEC 60034-12 (1980) Rotating Electrical Machines, Part 12: Starting Performance of  
Single-Speed Three-Phase Cage Induction Motors for Voltages Up  
to and Including 660 V

Copies available from: International Electrotechnical Commission  
3, rue de Varembé  
P.O. Box 131  
CH - 1211 Geneva 20  
Switzerland  
<http://www.iec.ch>  
Phone: +41 22 919 02 11  
FAX: +41 22 919 03 00

**NATIONAL ELECTRIC MANUFACTURERS ASSOCIATION (NEMA)**

NEMA MG1-1987                      Motors and Generators

NEMA MG1-1993                      Motors and Generators

NEMA Premium™: Product  
Scope and Nominal Efficiency  
Levels (2001)                      Motors

Copies available from:              National Electric Manufacturers Association  
1300 N. 17<sup>th</sup> Street, Suite 1847  
Rosslyn, VA 22209  
www.nema.org  
Phone: (703) 841-3200  
FAX: (703) 841-3300

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
Reference: Sections 25402(c) and 25960, Public Resources Code.



**Section 1603. Testing: All Appliances.**

- (a) **Testing Requirements.** The manufacturer shall cause the testing of units of each basic model of appliance within the scope of Section 1601, using the applicable test method listed in Section 1604. If the manufacturer of the basic model does not participate in an approved industry certification program for the basic model, or does not apply such a program to test all units under this Article, the testing shall be at a laboratory that the Executive Director determines that:
- (1) has conducted tests using the applicable test method within the previous 12 months;
  - (2) agrees to and does interpret and apply the applicable test method set forth in Section 1604 precisely as written;
  - (3) has, and keeps properly calibrated and maintained, all equipment, material, and facilities necessary to apply the applicable test method precisely as written;
  - (4) agrees to and does maintain copies of all test reports, and provides any such report to the Executive Director on request, for all basic models that are still in commercial production; and
  - (5) agrees to and does allow the Executive Director to witness any test of such an appliance on request, up to once per calendar year for each basic model.
- (b) **Approved Industry Certification Programs.**
- (1) The Executive Director shall, within 30 days of receiving a written request by an entity administering an appliance certification program, determine whether the program meets the criteria in Section 1602(a). If the Executive Director determines that the program meets all the criteria, he or she shall designate the program as an approved industry certification program. The Executive Director shall periodically publish a list of all approved industry certification programs.
  - (2) The Executive Director shall, within 30 days of receiving a written request, determine whether an approved industry certification program continues to meet the criteria in Section 1602(a). If the Executive Director determines that the program meets all the criteria, the program shall remain on the list of approved industry certification programs published under subparagraph (1). If the Executive Director determines that the program does not meet all the criteria, he or she shall remove the program from the list, and the program shall no longer be an approved industry certification program.
  - (3) Until ~~July 1~~January 1, 200~~2~~3, the programs listed below are deemed to be approved industry certification programs. Thereafter, approved industry certification programs are only those programs that have been approved by the Executive Director under paragraph (1).

AHAM:	Listing of Room Air Conditioners.
ARI:	Listing of Unitary Air-conditioning Systems (AC), Unitary Heat Pump Systems (HP), Packaged Terminal Air Conditioners (PTAC), Packaged Terminal Heat Pumps (PTHP), Unitary Large Equipment (ULE), Ground Water-Source Heat Pumps (GWHP), <del>and</del> Ground-Source Heat Pumps (GSHP), <a href="#">and Water-Source Heat Pumps (WSHP)</a> .
CSA:	Listing of Plumbing Fittings and Fixtures
GAMA:	Listing of Residential Heating Equipment Listing of Residential Water Heating Equipment
IAPMO:	Listing of Plumbing Fittings and Fixtures
NSF International:	Listing of Plumbing and Mechanical Products
UL:	Listing of Plumbing Fixtures and Related Products Listing of Fixture Fittings

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
Reference: Sections 25402(c) and 25960, Public Resources Code.

**Section 1604. Test Methods for Specific Appliances.****(a) Refrigerators, Refrigerator-Freezers, and Freezers.**

- (1) The test methods for non-commercial refrigerators, non-commercial refrigerator-freezers, and non-commercial freezers, are shown in Table A-1.

**Table A-1**  
**Non-Commercial Refrigerator, Refrigerator-Freezer, and Freezer Test Methods**

<i>Appliance</i>	<i>Test Method</i>
Non-commercial refrigerators, <u>designed for the refrigerated storage of food at temperatures above 32° F and below 39° F, configured for general refrigerated food storage;</u> refrigerator-freezers; and freezers; <del>excluding wine chillers</del>	10 CFR Sections 430.23(a) (2001) and 430.23(b) (2001), as applicable
Wine chillers that are consumer products	<p>10 CFR Section 430.23(a) (2001) with the following modifications:</p> <p>Standardized temperature as referred to in Section 3.2 of Appendix A1 shall be 55° F (12.8° C). <del>Correction factor K as referred to in Section 5.4.2.1 of Appendix A1 shall be 0.85.</del></p> <p><u>The calculation of test cycle energy expended (ET) in Section 5.2.1.1 of Appendix A1 shall be made using the modified formula:</u></p> <p><u><math>ET = (EP \times 1440 \times k) / T</math></u></p> <p><u>Where <math>k = 0.85</math></u></p>

- (2) The test methods for commercial refrigerators, commercial refrigerator-freezers, and commercial freezers are shown in Table A-2.

**Table A-2**  
**Commercial Refrigerator, Refrigerator-Freezer, and Freezer Test Methods**

<i>Appliance</i>	<i>Test Method</i>										
Refrigerating bottled or canned beverage vending machines	ANSI/ASHRAE 32.1-1997										
Refrigerated buffet and preparation tables	ANSI/ASTM F2143-01										
Other commercial refrigerators, refrigerator-freezers, and freezers, with doors	<p><a href="#">Volume measured using ANSI/AHAM HRF1-1988</a>  <a href="#">Energy consumption measured using ANSI/ASHRAE 117-1992</a>, except that with the controls adjusted to obtain the following product temperatures and with the back (loading) doors of pass-through and roll-through refrigerators and freezers shall remain closed throughout the test:</p> <table> <tr> <td><i>Type</i></td><td><i>Integrated Average Product Temperature (Section 9.1.1) in ° F</i></td></tr> <tr> <td>Refrigerator Compartment</td><td>38 ± 2</td></tr> <tr> <td>Freezer Compartment</td><td>0 ± 2</td></tr> <tr> <td>Wine chiller</td><td>45 ± 2</td></tr> <tr> <td>Ice Cream Cabinet</td><td>-5 ± 2</td></tr> </table>	<i>Type</i>	<i>Integrated Average Product Temperature (Section 9.1.1) in ° F</i>	Refrigerator Compartment	38 ± 2	Freezer Compartment	0 ± 2	Wine chiller	45 ± 2	Ice Cream Cabinet	-5 ± 2
<i>Type</i>	<i>Integrated Average Product Temperature (Section 9.1.1) in ° F</i>										
Refrigerator Compartment	38 ± 2										
Freezer Compartment	0 ± 2										
Wine chiller	45 ± 2										
Ice Cream Cabinet	-5 ± 2										
Other commercial refrigerators, refrigerator-freezers, and freezers, without doors	<p><a href="#">Volume measured using ANSI/AHAM HRF1-1988</a>  <a href="#">Energy consumption measured using ANSI/ASHRAE 72-1998</a>, with the controls adjusted to obtain the following product temperatures:</p> <table> <tr> <td><i>Type</i></td><td><i>Integrated Average Product Temperature (Section 9.1.1) in ° F</i></td></tr> <tr> <td>Refrigerator Compartment</td><td>38 ± 2</td></tr> <tr> <td>Freezer Compartment</td><td>0 ± 2</td></tr> <tr> <td>Wine chiller</td><td>45 ± 2</td></tr> <tr> <td>Ice Cream Cabinet</td><td>-5 ± 2</td></tr> </table>	<i>Type</i>	<i>Integrated Average Product Temperature (Section 9.1.1) in ° F</i>	Refrigerator Compartment	38 ± 2	Freezer Compartment	0 ± 2	Wine chiller	45 ± 2	Ice Cream Cabinet	-5 ± 2
<i>Type</i>	<i>Integrated Average Product Temperature (Section 9.1.1) in ° F</i>										
Refrigerator Compartment	38 ± 2										
Freezer Compartment	0 ± 2										
Wine chiller	45 ± 2										
Ice Cream Cabinet	-5 ± 2										

- (3) When a refrigerator, refrigerator-freezer, or freezer can be operated using either alternating current electricity or one or more other sources of primary power, the test shall be performed using alternating current electricity only.

- (b) **Room Air Conditioners, Room Air Conditioning Heat Pumps, Packaged Terminal Air Conditioners, and Packaged Terminal Heat Pumps.** The test methods for room air conditioners, room air-conditioning heat pumps, packaged terminal air conditioners, and packaged terminal heat pumps are shown in Table B-1.

**Table B-1**

**Room Air Conditioner, Room Air-Conditioning Heat Pump, Packaged Terminal Air Conditioner, and Packaged Terminal Heat Pump Test Methods**

<i>Appliance</i>	<i>Test Method</i>
Room air conditioners and room air-conditioning heat pumps	10 CFR Section 430.23(f) (2001) (Cooling) ASHRAE 58-74 (Heating)
Packaged terminal air conditioners and packaged terminal heat pumps	ANSI/ARI 310/380-93

- (c) **Central Air Conditioners.**

- (1) The test methods for central air conditioners are shown in Table C-1.
- (2) Air-cooled central air conditioners with rated cooling capacity less than 65,000 Btu per hour that are designed for use either at 230 volts or at another voltage may be tested at 230 volts and the results applied to the other voltages. Central air conditioners that are designed for use either at 208 volts or at another voltage may be tested at 208 volts and the results applied to the other voltages.
- (3) Split system central air conditioners and compressor-containing units shall be tested with the non-compressor-containing unit most likely to represent the highest national sales volume for the combined equipment.

**Table C-1**  
**Central Air Conditioner Test Methods**

<i>Appliance</i>	<i>Test Method</i>
Computer room air conditioners	ANSI/ASHRAE 127-2001
Other electric-powered unitary air-conditioners and electric-powered heat pumps	
air-cooled air conditioners and air-source heat pumps	
< 65,000 Btu/hr	ANSI/ARI 210/240-94 or <a href="#">ARI</a> /ISO 13253:1995 (at manufacturer's option)
≥ 65,000 and < 135,000 Btu/hr	ANSI/ARI 210/240-94
≥ 135,000 Btu/hr	ANSI/ARI 340/360-93
water-cooled air conditioners, evaporatively-cooled air conditioners, and water-source heat pumps	
< 135,000 Btu/hr	ANSI/ARI 320-98
≥ 135,000 Btu/hr	ANSI/ARI 340/360-93
ground water-source heat pumps	ARI/ISO-13256-1:1998
ground source closed-loop heat pumps	ARI/ISO-13256-1:1998
Gas-fired air conditioners and gas-fired heat pumps	ANSI Z21.40.4-1996 as modified by CEC, Efficiency Calculation Method for Gas-Fired Heat Pumps as a New Compliance Option (1996)

(d) **Spot Air Conditioners.** The test method for spot air conditioners is ANSI/ASHRAE 128-2001.

(e) **Gas Space Heaters and Oil Space Heaters.**

- (1) The test methods for gas space heaters and oil space heaters are shown in Table E-1.
- (2) Gas space heaters intended for use either with natural gas or LPG may be tested with natural gas and the results applied to both fuel types.

- (3) **Combination Space-Heating and Water-Heating Appliances.** The test method for combination space-heating and water-heating appliances is ANSI/ASHRAE 124-1991.

**Table E-1**  
**Gas and Oil Space Heater Test Methods**

<i>Appliance</i>	<i>Test Method</i>
Central furnaces	
< 225,000 Btu/hr, single phase	10 CFR Section 430.23(n) (2001)
< 225,000 Btu/hr, three phase	10 CFR Section 430.23(n) (2001) or ANSI Z21.47-2001 (at manufacturer's option)
≥ 225,000 Btu/hr	
gas-fired	ANSI Z21.47-2001
oil-fired	<del>ANSI</del> /UL 727- <del>94</del> <a href="#">1994</a>
Gas infrared heaters	
patio heaters	FSTC 025-01
gas-fired high-intensity infrared heaters	ANSI Z83.19-2001
gas-fired low-intensity infrared heaters	ANSI Z83.20-2001
Unit heaters	
gas-fired	ANSI Z83.8-1996*
oil-fired	<del>ANSI</del> /UL 731- <del>95</del> <a href="#">1995</a> *
Gas duct furnaces	ANSI Z83.9-1990
Boilers	
< 300,000 Btu/hr	10 CFR Section 430.23(n) (2001)
≥ 300,000 Btu/hr	HI BTS-2000
Wall furnaces, floor furnaces, and room heaters	10 CFR Section 430.23(o) (2001)

\*To calculate maximum energy consumption during standby, measure the gas energy used in one hour (in BTUs) and the electrical energy used (in watt-hours) over a one-hour period, when the main burner is off.

Divide BTUs and watt-hours by one hour to obtain BTUs per hour and watts. Divide BTUs per hour by 3.412 to obtain watts. Add watts of gas energy to watts of electrical energy to obtain standby energy consumption in watts.



(f) **Water Heaters.**

- (1) **Small Water Heaters.** The test methods for small water heaters are shown in Table F-1.

**Table F-1**  
**Small Water Heater Test Methods**

<i>Appliance</i>	<i>Test Method</i>
Small water heaters that are federally-regulated consumer products	10 CFR Section 430.23(e) (2001)
Small water heaters that are not federally-regulated consumer products	
Gas and oil storage-type < 20 gallons	ANSI/ASHRAE 118.2-1993
Booster water heaters	ANSI/ASTM F2022-01 (for all matters other than volume) ANSI Z21.10.3-1998 (for volume)
Hot water dispensers	Test Method in 1604(f)(4)
Mini-tank electric water heaters	Test Method in 1604(f)(5)
All others	10 CFR Section 430.23(e) (2001)

- (2) **Large water heaters.** The test method for large water heaters is: for booster water heaters ANSI/ASTM F2022-01, and for all others ANSI Z21.10.3-1998, modified as follows:
- (A) When testing an electric storage-type water heater for standby loss using Section 2.10 of ANSI Z21.10.3-1998:
- (i) the electrical supply voltage shall be maintained within  $\pm 1$  percent of the center of the voltage range specified on the water heater nameplate; and
  - (ii) when needed for calculations, the thermal efficiency ( $E_t$ ) shall be 98 percent.
- (B) When testing an oil water heater using Sections 2.9 and 2.10 of ANSI Z21.10.3-1998:
- (i) a vertical length of flue pipe, of sufficient height to establish the minimum draft specified in the manufacturer's installation instructions, shall be connected to the flue gas outlet;
  - (ii) all measurements of oil consumption shall be taken by instruments with an accuracy of  $\pm 1$  percent or better; and

- (iii) the burner rate shall be adjusted to achieve an hourly Btu input rate within  $\pm 2$  percent of the manufacturer's specified input rate, with the CO<sub>2</sub> reading as specified by the manufacturer, with smoke no greater than 1, and the fuel pump pressure within  $\pm 1$  percent of the manufacturer's specification.
- (3) **Dual-Fuel Models.** Water heaters intended for use either with natural gas or LPG may be tested with natural gas and the results applied to both fuel types.
- (4) **Hot Water Dispensers.** The test method for hot water dispensers is as follows:
  - (A) Connect the hot water dispenser to a water supply, a power supply and a means of measuring energy use. Fill the hot water dispenser with water and apply the power supply. Control the ambient temperature in the laboratory at  $77^{\circ}\text{F} \pm 7^{\circ}\text{F}$  throughout the test.
  - (B) Let the unit operate in standby mode for at least 2 complete cycles of thermostat operation, with the thermostat set to  $150^{\circ}\text{F} \pm 10^{\circ}\text{F}$  as described below.
  - (C) If the thermostat is adjustable, set it to produce water at  $150^{\circ}\text{F} \pm 10^{\circ}\text{F}$ , determined by discharging 5 oz. of water into an insulated cup immediately after a thermostat cut out, then measuring its temperature.
  - (D) If the thermostat is adjustable, and the temperature is not within the tolerance shown in Step B, readjust the thermostat and allow it to operate in standby mode for 2 cycles, measuring the discharge temperature immediately after the second cutout, as described above.
  - (E) After the thermostat has been properly adjusted, allow the unit to operate in standby mode for a minimum of 2 cycles, then measure the electricity used (in Wh) during the next 24 hours (plus time for first cut out after 24 hours). Begin measuring electricity usage immediately after a thermostat cut out, and end just after the first thermostat cut out after 24 hours. The total length of the test will be somewhat longer than 24 hours, depending on the first cut out after 24 hours. Divide the measured electricity used (in Wh) by the time (in hours), to obtain the standby loss (in watts).
  - (F) Record the water temperature measured in Step D and the standby loss calculated in Step E.
- (5) **Mini-Tank Electric Water Heaters.** The test method for mini-tank electric water heaters is as follows:
  - (A) **Storage Tank Volume**

Determine the storage capacity of the water heater, in gallons, by subtracting the weight of the empty water heater from the weight of the water heater when completely filled with water (with all air eliminated and line pressure applied) and dividing the resulting net weight by the density of water at the measured temperature.

$$V = \frac{W_f - W_t}{\rho}$$

Where:

V = the storage capacity in gallons

W<sub>f</sub> = the weight of the water heater when full (lb)

W<sub>t</sub> = the weight of the empty water heater (lb)

ρ = the density of the water (lb/gal)

#### (B) Test Set-Up

- (i) Insulate the water piping, including heat traps, if provided by the manufacturer, for a length of 4 feet from the connection to the appliance with material having a thermal resistance (R) value of not less than 4° F x ft<sup>2</sup> x hr/Btu. Ensure that the insulation does not contact any water heater surface except at the location where the pipe connections penetrate the appliance jacket.
- (ii) If the manufacturer has not provided a temperature and pressure relief valve, one shall be installed and insulated.
- (iii) Maintain the temperature of the supply water at 70°F ± 2° F and the pressure of the water supply between 40 psi and the maximum pressure specified by the manufacturer. The accuracy of the pressure measuring devices shall be within ± 1.0 pound per square inch. The water heater shall be isolated by use of a shut-off valve in the supply line with an expansion tank installed in the supply line downstream of the shutoff valve. There shall be no shut-off means between the expansion tank and the appliance inlet.
- (iv) Before starting testing of the water heater, the setting of the thermostat shall first be obtained by supplying the water in the system at 70°F ± 2° F and then noting the maximum mean temperature of the water after the thermostat shuts off the electric supply to be 142°F ± 8° F.
- (v) For measuring the energy consumption, instrumentation shall be installed which measures within ± 2 percent. Voltage shall be within ± 10 percent of the rated voltage.
- (vi) Three or more temperature sensing means shall be installed inside the storage tank on the vertical center of each of three or more nonoverlapping sections of approximately equal volume from the top to the bottom of the tank. Each temperature sensing means is to be located as far as possible from any heat source or other irregularity, anodic protective device, or water tank or flue wall. The anodic protective device shall be removed in order to install the temperature sensing means and testing shall be carried out with the device removed.

If the temperature sensing means cannot be installed as specified above, placement of the temperature sensing means shall be made at the discretion of the testing agency so that comparable water temperature measurements are obtained. A temperature sensing means, shielded against direct radiation and positioned at the vertical midpoint of a tank-type water heater at a perpendicular distance of approximately 24 inches from the surface of the jacket, shall be installed in the test room.

- (vii) The ambient air temperature of the test room shall be maintained at  $75^{\circ}\text{F} \pm 10^{\circ}\text{F}$ . The ambient temperature shall not vary more than  $\pm 7.0^{\circ}\text{F}$  from the average during the test, temperature readings being taken at 15 minute intervals and averaged at the end of the test.

(C) First Hour Rating,  $F_{\text{hr}}$ , gallons/hr

Heat the water to mean water temperature of  $142^{\circ}\text{F} \pm 8^{\circ}\text{F}$ . Draw hot water at  $0.6 \text{ gpm} \pm 0.1 \text{ GPM}$  until the mean water temperature drops  $25^{\circ}\text{F}$ , while recording the water temperature every 5 seconds. Maintain the supply water temperature at  $70^{\circ}\text{F} \pm 2^{\circ}\text{F}$ . Measure the volume of water drawn, ( $F_{\text{hr}}$ ), which is the first hour rating  $F_{\text{hr}}$ .

(D) Standby Loss

Fill the water heater with water. Turn on the electric power to the water heater. After the first cutout, allow the water heater to remain in the standby mode until the next cutout. At this time, record the time, ambient temperature and begin measuring the electric consumption. Record the maximum mean tank temperature that occurs after cutout.

Record the mean tank temperature and the ambient air temperature at the end of the first 15 minute interval and at the end of each subsequent 15 minute interval. The duration of this test shall be until the first cutout that occurs after 24 hours.

Immediately after the conclusion of the test, record the total electrical energy consumption, the final ambient air temperature, and the time duration of the standby loss test (t) in hours rounded to the nearest one hundredth of an hour and the maximum mean tank temperature that occurs after cutout. Calculate the average of the recorded values of the mean tank temperatures and of the ambient air temperatures taken at the end of each time interval, including the initial and final values.

Determine the difference ( $\Delta T_3$ ) between these two averages by subtracting the latter from the former, and the differences ( $\Delta T_4$ ) between the final and initial mean tank temperatures by subtracting the latter from the former.

Standby Loss (% per hour).

Determine the percentage standby loss using the formula:

$$S = \left[ \frac{E \times 3412}{(K)(V)(\Delta T_3)(t)} - \frac{(\Delta T_4)}{(\Delta T_3)(t)(E_r/100)} \right] \times 100$$

Where:

- S = standby loss, percent per hour, expressed as a ratio of the heat loss per hour to the heat content of the stored water above room temperature
- K = 8.25 Btu per gallon °F, the nominal specific heat of water
- V = tank capacity expressed in gallons
- 3412 = conversion factor, 1 kWh = 3412 Btu
- $\Delta T_3$  = difference between the mean tank temperature and the average ambient air temperature, °F
- $\Delta T_4$  = difference between the final and initial mean tank temperature, °F
- t = duration of test, hrs.
- E = electrical energy consumption in kWh
- $E_r$  = recovery efficiency, assumed to be 98% for water heaters with immersed heating elements

#### (E) Calculations

Determine the Recovery Efficiency ( $E_r$ ) using the following formula:

$$E_r = 1 - \frac{(S \times K \times V \times \Delta T_2)}{(P \times 3412 \text{ Btu/kWh})}$$

Where:

- S = standby loss,  $\text{hr}^{-1}$
- $\Delta T_2$  = 45° F, the nominal average difference between the mean tank temperature and the ambient air temperature during recovery
- P = Rated input, kW
- K = 8.25 Btu per gallon °F, the nominal specific heat of water
- V = tank capacity expressed in gallons

Determine the Standby Loss (W) using the formula:

$$W = S \times K \times V (\Delta T_1) / (3412 \text{ Btu/kWh})$$

Where:

- $\Delta T_1$  = 70° F, difference between final mean tank temperature and the average ambient air temperature
- S = standby loss,  $\text{hr}^{-1}$
- K = 8.25 Btu per gallon °F, the nominal specific heat of water



$V$  = tank capacity expressed in gallons

3412 = conversion factor from kWh to Btu/hr

Determine the Daily Water Heating Energy Consumption, ( $C_{wh}$ ) using the formula:

$$C_{wh} = \frac{K \times U \times \Delta T_5}{E_r}$$

Where:

$U$  = 12 gallons, daily water use

$\Delta T_5$  = 72° F, difference in outlet and inlet water temperatures

$K$  = 8.25 Btu per gallon °F, the nominal specific heat of water

$E_r$  = recovery efficiency, assumed to be 98%

Determine the Average Hourly Hot Water Storage Energy Consumption, ( $C_{us}$ ) using the formula:

$$C_{us} = S \times K \times V \times \Delta T_1$$

Where:

$\Delta T_1$  = 70° F, nominal difference between the mean tank temperature and the ambient air temperature

$S$  = standby loss,  $hr^{-1}$

$K$  = 8.25 Btu per gallon °F, the nominal specific heat of water

$V$  = tank capacity expressed in gallons

Determine the Average Daily Energy Consumption for Electric Water Heaters, ( $C_y$ ) using the formula:

$$C_y = C_{wh} + C_{us} \times \frac{24 \text{ hrs}}{\text{day}} - \frac{C_{wh}}{P \times 3412 \text{ Btu/kWh}}$$

Where:

$$C_{wh} = \frac{K \times U \times \Delta T_5}{E_r}$$

$$C_{us} = S \times K \times V \times \Delta T_1$$

$P$  = Rated input, kW

3412 = conversion factor from kWh to Btu/hr



Determine the Daily Hot Water Energy Consumption, ( $C_c$ ) using the formula:

$$C_c = K \times U \times \Delta T_5$$

Where:

$K$  = 8.25 Btu per gallon °F, the nominal specific heat of water

$U$  = 12 gallons, daily water use

$\Delta T_5$  = 72° F, difference in outlet and inlet water temperatures

Determine the Annual Energy Consumption, kBtu/year ( $E_{\text{annual}}$ ) using the formula:

$$E_{\text{annual}} = \frac{C_{y, \text{ Btu/day}} \times 365 \text{ days/yr}}{1000}$$

(F) Report the following values:

Measured Volume, $V$	=	gallons
First Hour Rating, $F_{\text{hr}}$	=	gallons/hr
Rated electrical input, $P$	=	kW
Size (overall dimensions)	=	inches (h x w x d)
Recovery Efficiency, $E_r$	=	%
Standby Loss, $S$	=	%/hr
Standby Loss	=	Watts
Annual Energy Consumption, $E_{\text{annual}}$	=	kBtu

(g) **Pool Heaters.**

The test methods for pool heaters are shown in Table G.

**Table G**  
**Pool Heater Test Methods**

<i>Appliance</i>		<i>Test Method</i>	
Gas-fired and oil-fired pool heaters		ANSI Z21.56- <del>1994</del> <a href="#">1998</a>	
Electric resistance pool heaters		ANSI/ASHRAE 146-1998	
Heat pump pool heaters		ANSI/ASHRAE 146-1998, as modified by Addendum Test Procedure published by Pool Heat Pump Manufacturers Association dated April, 1999, Rev 4: Feb. 28, 2000:	
<i>Reading</i>	<i>Standard Temperature Rating</i>	<i>Low-Temperature Rating</i>	<i>Spa Conditions Rating</i>
Air Temperature			
Dry-bulb	27.0° C (80.6° F)	10.0° C (50.0° F)	27.0° C (80.6° F)
Wet-bulb	21.7° C (71.0° F)	6.9° C (44.4° F)	21.7° C (71.0° F)
Relative Humidity	63%	63%	63%
Pool Water Temperature	26.7° C (80.0° F)	26.7° C (80.0° F)	40.0° C (104.0° F)

(h) **Plumbing Fittings.**

- (1) The test method for plumbing fittings is ANSI/ASME A112.18.1-2000.
- (2) Showerhead-tub spout diverter combinations shall have both the showerhead and tub spout diverter tested individually.

(i) **Plumbing Fixtures.** The test method for plumbing fixtures is ANSI/ASME A112.19.2M-1998.

(j) **Fluorescent Lamp Ballasts.** The test method for fluorescent lamp ballasts is 10 CFR Section 430.23(q) (2001).

(k) **Lamps.** The test method for general service fluorescent lamps and incandescent reflector lamps is 10 CFR Section 430.23(r) (2001).

(l) **Emergency Lighting.**

- (1) Conditions for testing:
  - (A) testing shall be conducted in clear (non-smoke) conditions;
  - (B) all measurements shall be made in a stable ambient air temperature of 25° C ± 5° C;

- (C) all voltages shall be provided within  $\pm 0.5$  percent by a constant voltage power supply;
- (D) signs which are rated for continuous operation at more than one AC input voltage shall be tested at each of the rated AC input voltages.
- (E) prior to input power or photometric measurements, the sign shall be operated at the rated input voltage for a period of 100 hours;
- (F) in addition, a sign with an internal battery shall be operated from the battery for one-and-one-half hours and then recharged for the period specified by the manufacturer; and
- (G) all of the light sources of the sign, except those only energized in the battery operation mode, shall produce light throughout the first 100 hours of operation.

(2) Input power measurement

Measure the ~~The~~ total input power ~~of each face~~ of the sign in its entirety ~~shall be measured~~ with an appropriate true RMS watt meter at the rated input voltage which represents normal operation. For a sign that includes a battery, the battery circuit shall be connected and the battery fully charged before any measurements are made. Calculate input power per face by dividing total input power of the sign by the number of faces.

(3) Photometric measurements. Each of the luminance characteristics of the sign shall be measured at three voltages (or three voltages for each of the rated AC input voltages for signs rated for continuous operation at more ~~then on~~ than one AC input voltage).

- (A) ~~in~~ the rated input voltage which represents normal operation;
- (B) a voltage corresponding to the minimum voltage provided either by the internal battery or a remote emergency power source after one minute of operation, as applicable; and
- (C) a voltage corresponding to the minimum voltage provided by the internal battery after the marked rated operating time or at 87.5 percent of the rated emergency input voltage for signs intended to be connected to a remote emergency power source. The level of illumination of the exit sign shall be permitted to decline to 60 percent of the initial illumination by the end of the emergency lighting time duration.


All measurements shall be taken with less than 0.01 foot-candles of external illumination on the face of the sign. The luminances shall be measured from two viewing angles: 1) from normal ( $0^\circ$ ) to the face of the sign, and 2) from  $45^\circ$  to the face of the sign.

(4) Luminance measurement positions.

The positions where the luminances for the legend and background of the exit sign are to be measured are found in Figures 40.4 through 40.9A (as appropriate for the type of sign being tested) of UL 924-199~~9~~5 (revised 1999).

(5) Measurement of exit sign luminance.

Measurement of directional indicator.

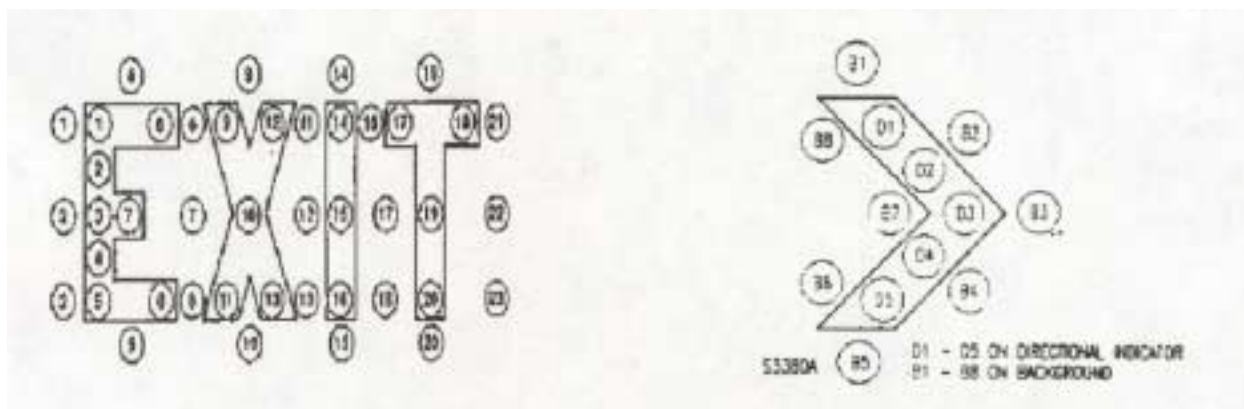

The luminance for each numbered position in the legend and directional indicator shall be measured over a circular area as large as possible while maintaining at least a 1.6 mm distance between the perimeter of the circular area and the adjacent border. The positions for measuring the luminances of the background shall lie within 25.4 mm of the legend and directional indicator but no closer than 1.6 mm to the border.

(6) Luminance calculations

The following shall be calculated:

(A) **Average luminance** of (a*i*) the legend or background of the legend, whichever is higher, and where applicable, (b*ii*) the directional indicator or its background, whichever is higher: for each, the luminance of all the positions measured.

(B) **Luminance contrast:**

$$\text{Contrast} = \frac{L_g - L_e}{L_g}$$

Where:  $L_g$  is the greater luminance and  
 $L_e$  is the lesser luminance,

either the variable  $L_g$  or  $L_e$  may represent the legend or directional indicator, and the remaining variable shall represent the respective background.

(C) **Minimum luminance** of (a*i*) the legend or background of the legend, whichever is higher, and where applicable, (b*ii*) the directional indicator or its background, whichever is higher: for each, the lowest luminance of all points measured.

(D) **Luminance uniformity** Maximum to minimum luminance ratio of (a*i*) the legend, or background of the legend, whichever is higher, and where applicable, (b*ii*) the directional indicator or its background, whichever is higher: for each the ratio of the

highest luminance of any position measured to the lowest luminance of any position measured.

- (m) **Traffic Signal Modules and Traffic Signal Lamps.** The test method for traffic signal modules and traffic signal lamps is the CalTrans Traffic Signal Specifications for LED Signal Modules, March 9, 2001.
- (n) **Luminaires.** There is no test method for torchieres.
- (o) **Dishwashers.** The test method for dishwashers is 10 CFR Section 430.23(c) ~~(2001)~~ [\(66 Federal Register 65,091 \(December 18, 2001\)\)](#).
- (p) **Clothes Washers.** The test methods for clothes washers are shown in Table P-1.

**Table P-1**  
**Clothes Washer Test Methods**

<i>Appliance</i>	<i>Test Method</i>
Clothes washers that are consumer products	10 CFR Section 430.23(j) (Appendix J to Subpart B of Part 430) (2001)
Commercial clothes washers	10 CFR Section 430.23(j) (Appendix J1 to Subpart B of Part 430) (2001)

- (q) **Clothes Dryers.** The test method for clothes dryers is 10 CFR Section 430.23(d) (2001).
- (r) **Cooking Products and Food Service Equipment.** The test methods for cooking products that are consumer products, commercial hot food holding cabinets, commercial convection ovens and commercial range tops are shown in Table R.

**Table R**  
**Cooking Products and Food Service Equipment Test Methods**

<i>Appliance</i>	<i>Test Method</i>
Cooking products that are consumer products	10 CFR Section 430.23(i) (2001)
Commercial hot food holding cabinets	ANSI/ASTM F2140-01
Commercial convection ovens	ANSI/ASTM F1496-99 (Test for energy input rate and idle energy consumption only)
Commercial range tops	ANSI/ASTM F1521-96 (Test for cooking energy efficiency only)

- (s) **Electric Motors.** The test method for electric motors is 10 CFR Sections 431.23 - 431.28 (2001), including but not limited to provisions on testing laboratories, recognition of accreditation bodies, and recognition of certification programs.
- (t) **Distribution Transformers.** The test method for distribution transformers is NEMA TP 2-1998.

The following documents are incorporated by reference in Section 1604.

### **CALIFORNIA ENERGY COMMISSION TEST METHODS**

CEC/Gas-Fired Heat Pumps Exceptional Method (1996)	Efficiency Calculation Method for Gas-Fired Heat Pumps as a New Compliance Option (1996)
---	---

Copies available from:	California Energy Commission Energy Hotline 1516 Ninth Street, MS-25 Sacramento, California 95814 Phone: (916) 654-5106 FAX: (916) 654-4304
------------------------	--

### **FEDERAL TEST METHODS**

CFR, Title 10, Section 430.23 (2001)

CFR, Title 10, Sections 431.23-431.28 (2001)

Copies available from:	Superintendent of Documents U.S. Government Printing Office Washington, DC 20402 <a href="http://www.access.gpo.gov/nara/cfr">www.access.gpo.gov/nara/cfr</a>
------------------------	--

### **AIR-CONDITIONING AND REFRIGERATION INSTITUTE (ARI)**

ANSI/ARI 210/240-94	Standard for Unitary Air-Conditioning and Air-Source Heat Pump Equipment
ANSI/ARI 310/380-93	Standard for Packaged Terminal Air-Conditioners and Heat Pumps
ANSI/ARI 320-98	Standard for Water-Source Heat Pumps
ANSI/ARI 340/360-93	Standard for Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment
ARI/ISO 13253:1995	Ducted Air Conditioners and Air-to-Air Heat Pumps

ARI/ISO 13256-1:1998

Standard for Water-Source Heat Pumps ([used only for ground water-source heat pumps and ground-source closed-loop heat pumps](#))

Copies available from:

Air-Conditioning and Refrigeration Institute  
4301 North Fairfax Drive, Suite 425  
Arlington, VA 22203  
[www.ari.org](http://www.ari.org)  
Phone: (703) 524-8800  
FAX: (703) 528-3816

**AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)**

ANSI Z21.10.3-1998

Standard for Gas Water Heaters, Volume III, Storage Water Heaters with Input Ratings Above 75,000 Btu per hour, Circulating and Instantaneous

ANSI Z21.40.4-1996 ~~and~~  
~~ANSI Z21.40.4a-1998~~

Performance Testing and Rating of Gas-Fired Air-Conditioning and Heat Pump Appliances

ANSI Z21.47-2001

Standard for Gas-Fired Central Furnaces

ANSI Z21.56-~~1994~~[1998](#)

Standard for Gas-Fired Pool Heaters

ANSI Z83.8-1996

Standard for Gas Unit Heaters

ANSI Z83.9-1990

Standard for Gas-Fired Duct Furnaces

ANSI Z83.19-2001

Standard for Gas-Fired High-Intensity Infrared Heaters

ANSI Z83.20-2001

Standard for Gas-Fired Low-Intensity Infrared Heaters

Copies available from:

American Gas Association  
400 North Capitol Street, N.W.  
Washington, DC 20001  
[www.aga.org](http://www.aga.org)  
Phone: (202) 824-7000  
FAX: (202) 824-7115

**AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)**

ANSI/ASHRAE 32.1-1997

Methods of Testing for Rating Bottled and Canned Beverage Vending Machines

[ASHRAE 58-74](#)

[Method of Testing Room Air Conditioner Heating Capacity](#)

ANSI/ASHRAE 72-1998

Method of Testing Open Refrigerators

ANSI/ASHRAE 117-1992	Method of Testing Closed Refrigerators
ANSI/ASHRAE 118.2-1993	Method of Testing for Rating Residential Water Heaters
ANSI/ASHRAE 124-1991	Method of Testing for Rating Combination Space-Heating and Water-Heating Appliances
ANSI/ASHRAE 127-2001	Method of Testing for Rating Computer and Data Processing Room Unitary Air-Conditioners
ANSI/ASHRAE 128-2001	Method of Rating Spot Unitary Air Conditioners
ANSI/ASHRAE 146-1998	Method of Testing and Rating Pool Heaters
Copies available from:	American Society of Heating, Refrigerating and Air-Conditioning Engineers 1791 Tullie Circle N.E. Atlanta, GA 30329 <a href="http://www.ashrae.org">www.ashrae.org</a> Phone: (800) 527-4723 (U.S./Canada) or (404) 636-8400 FAX: (404) 321-5478

#### **AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)**

ANSI/ASME A112.18.1-2000	Plumbing Fixture Fittings
ANSI/ASME A112.19.2M-1998	Vitreous China Plumbing Fixtures
Copies available from:	ASME International Three Park Avenue New York, NY 10016-5990 <a href="http://www.asme.org">www.asme.org</a> Phone: (800) THE-ASME (U.S./Canada) 95-800-843-2763 (Mexico) (973) 882-1167 (Outside North America)

#### **AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)**

ANSI/ASTM F2022-01	Standard Test Method for Performance of Booster Water Heaters
ANSI/ASTM F1496-99	Standard Test Method for Performance of Convection Ovens
ANSI/ASTM F1521-96	Standard Test Methods for Performance of Range Tops



## 1604

ANSI/ASTM F2140-01

Standard Test Method for the Performance of Hot Food Holding Cabinets

ANSI/ASTM F2143-01

Standard Test Method for the Performance of Refrigerated Buffet and Preparation Tables

Copies available from:

ASTM  
100 Barr Harbor Drive  
West Conshohocken, PA 19428-2959  
[www.astm.org](http://www.astm.org)  
Phone: (610) 832-9585  
FAX: (610) 832-9555

### ASSOCIATION OF HOME APPLIANCES MANUFACTURERS (AHAM)

ANSI/AHAM HRF1-1988

Household Refrigerators, Combination Refrigerator-Freezers, and Household Freezers

Copies available from:

Association of Home Appliance Manufacturers  
1111 19<sup>th</sup> Street, NW, Suite 402  
Washington, DC 20036  
[www.aham.org](http://www.aham.org)  
Phone: (202) 872-5955  
FAX: (202) 872-9354

### **CALIFORNIA DEPARTMENT OF TRANSPORTATION (CalTrans)**

Traffic Signal Specifications for LED Signal Modules,  
March 9, 2001

Copies available from:

California Department of Transportation  
Publication Distribution Unit  
1900 Royal Oaks Drive  
Sacramento, CA 95815  
[www.dot.ca.gov/hq/traffops/electsys/led/index.htm](http://www.dot.ca.gov/hq/traffops/electsys/led/index.htm)  
Phone: (916) 445-3520

### **HYDRONICS INSTITUTE (HI)**

BTS-2000

Method to Determine Efficiency of Commercial Space Heating Boilers

Copies available from:

Hydronics Institute Division of GAMA  
P.O. Box 218  
Berkeley Heights, NJ 07922-0218  
[www.gamanet.org](http://www.gamanet.org)  
Phone: (908) 464-8200  
FAX: (908) 464-7818

**NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)**

NEMA TP2-1998                      Standard Test Method for Measuring the Energy Consumption of  
Distribution Transformers

Copies available from:              National Electrical Manufacturers Association  
1300 N. 17<sup>th</sup> Street, Suite 1847  
Rosslyn, VA 22209  
www.nema.org  
Phone: (703) 841-3200  
FAX: (703) 841-3300

**NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)**

NFPA 101-2000                      Life Safety Code

Copies available from:              National Fire Protection Association  
1 Batterymarch Park  
P.O. Box 9101  
Quincy, MA 02269-9101  
www.nfpa.org  
Phone: (800) 344-3555 (U.S./Canada)  
95-800-844-6058 (Mexico)  
(617) 770-3000 (Outside North America)  
FAX: (508) 895-8301

**PG&E FOOD SERVICE TECHNOLOGY CENTER (FSTC)**

FSTC 025-01                      Standard Test Method for the Performance of Patio Heaters

Copies available from:              PG&E Food Service Technology Center  
12949 Alcosta Boulevard, Suite 101  
San Ramon, CA 94583  
www.pge.com/fstc  
Phone: (925) 866-2844  
FAX: (925) 866-2864

**POOL HEAT PUMP MANUFACTURERS ASSOCIATION**

Addendum Test Procedure – April 1999, Rev. 4: Feb. 28, 2000

Copies available from:              Pool Heat Pump Manufacturers Association  
Jeff Tawney, President  
c/o Aquacal  
2737 24<sup>th</sup> Street, North  
St. Petersburg, FL 33713  
Phone: (727) 823-5642 Ext. 130



**UNDERWRITERS LABORATORIES, INC. (UL)**

<del>ANSI</del> UL 727- <del>94</del> <a href="#">1994</a>	Standard for Safety for Oil-Fired Central Furnaces	
<del>ANSI</del> UL 731- <del>95</del> <a href="#">1995</a>	Standard for Safety for Oil-Fired Unit Heaters	
<del>ANSI</del> UL 924- <a href="#">1995</a> <del>9</del> ( <a href="#">rev. 1999</a> )	Standard for Safety for Emergency Lighting and Power Equipment	

Copies available from:

Underwriters Laboratories, Inc.  
 333 Pfingsten Road  
 Northbrook, IL 60062-2096  
[www.ul.com](http://www.ul.com)  
 Phone: (847) 272-8800  
 FAX: (847) 272-8129

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
 Reference: Sections 25402(c) and 25960, Public Resources Code.

**Section 1605. Energy Performance, Energy Design, Water Performance, and Water Design Standards: In General.**

- (a) **California Standards that are the Same as Federal Standards.** Section 1605.1 contains standards that are the same as the federal standards contained in, or adopted in regulations pursuant to, NAECA or EPAAct.
  - (1) The standards in Section 1605.1 are applicable as federal law to the sale of appliances in California and the rest of the United States.
  - (2) The standards in Section 1605.1 are also adopted in this Article as California state law applicable to appliance installation in Title 24 construction.
  - (3) Each standard in Section 1605.1 is also adopted in this Article as California state law applicable to the sale and offering for sale of appliances in California, if the corresponding federal standard is repealed or becomes inoperable, inapplicable, or otherwise invalid as federal law. Provided, however, that if a waiver from federal preemption is required for a standard in Section 1605.1, the state standard takes effect as California state law only on the effective date of a U.S. Department of Energy waiver from federal preemption.
- (b) **California Standards for Federally-Regulated Appliances.** Section 1605.2 contains standards that are exclusively California standards. They are applicable as state law to both sale and offering for sale of appliances in California and to appliance installation in Title 24 construction. Because the standards apply to federally-regulated appliances, they take effect as state law only on the effective date of a U.S. Department of Energy waiver from federal preemption.
- (c) **California Standards Applicable to Sale and Installation.** Section 1605.3 contains standards that are exclusively California standards. They are applicable as state law to both the sale or offering for sale of appliances in California and to appliance installation in Title 24 construction.
- (d) **Multiple Standards.** If more than one standard is shown for an appliance in Section 1605.1, 1605.2, or 1605.3, the appliance shall meet all the standards shown.
- (e) **Multiple Test Methods.** If more than one test method is shown as applicable to a standard in Section 1605.1, 1605.2, or 1605.3, the appliance shall comply with the standard when tested with each and every individual specified test method, except for those appliances where the appropriate provision in Section 1604 specifically allows a choice of test method at the manufacturer's option.
- (f) **Multiple Functions.** If an appliance can serve more than one function, such as either space-heating and service water-heating then: (1) if the primary function is served by ~~an appliance that is a~~ federally-regulated appliance, ~~consumer product or federally-regulated commercial and industrial equipment~~, the primary function appliance shall meet the applicable standard in Section 1605.1; and (2) if the primary function is served by an appliance that is not a federally-regulated appliance, ~~consumer product or federally-regulated commercial and industrial equipment~~, the primary function appliance shall meet the applicable standard in Section 1605.2 or Section 1605.3; and the secondary function appliances shall meet the applicable standards in Sections 1605.1, 1605.2, and 1605.3. Water heaters that are federally-regulated appliances, and that are contained in combination space heating and water heating appliances that are federally-regulated appliances, are required only to

meet the standard for the applicable type of water heater, and are not required to meet any standard for space heaters.

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
Reference: Sections 25402(c) and 25960, Public Resources Code.

## 1605.1

### **Section 1605.1. Federally-Regulated Appliances: Standards Applicable To Both Sale (Federal Enforcement) and to Title 24 Construction (California Enforcement).**

The standards in this Section are both federal law and California state law. They apply to federally-regulated consumer products and federally-regulated commercial and industrial equipment.

**Federal Law.** Under 42 U.S.C. Sections 6302(a)(5), 6316(a), and 6316(b)(1), which are enforced by the U.S. Department of Energy, no appliance listed in this Section may be sold in the United States unless the appliance complies with the applicable standard listed in this Section as determined using the applicable test method listed in Section 1604, and with all other requirements of federal law.

**State Law: Applicability to Title 24 Construction.** As described in Section 1608 and enforced by the ~~California Energy~~ Commission and local building departments, no appliance listed in this Section may be installed in Title 24 construction unless the appliance complies with the applicable standard in this Section as determined using the applicable test method listed in Section 1604, and with all other requirements of this Article.

**State Law: Applicability to Sale or Offering for Sale in California if Federal Standards Do Not Apply.** If any federal standard listed in this Section is repealed by the federal government, or if the federal standard becomes inoperable, inapplicable, or otherwise invalid as federal law, then immediately upon the effect of such federal repeal or invalidity the standard becomes effective as California state law, and no appliance previously covered by the federal standard shall be sold or offered for sale in the state unless the appliance complies with the state standard as determined using the applicable test method listed in Section 1604, and with all other requirements of this Article. Provided, however, that if a waiver from federal preemption is required for the state standard, the state standard takes effect as California state law only on the effective date of a U.S. Department of Energy waiver from federal preemption.

#### **(a) Refrigerators, Refrigerator-Freezers, and Freezers.**

- (1) **Standards.** The energy consumption of refrigerators; designed for the refrigerated storage of food at temperatures above 32° F and below 39° F, configured for general refrigerated food storage, refrigerator-freezers, and freezers, including internal freezers, drawer units, and kitchen units that are manufactured on or after the effective dates shown shall be not greater than the applicable values shown in Table A-3.

**Table A-3**  
**Standards for Refrigerators, Refrigerator-Freezers, and Freezers**

<i>Appliance</i>	<i>Maximum Energy Consumption (kWh/yr)</i>	
	<b>Effective January 1, 1993</b>	<b>Effective July 1, 2001</b>
Refrigerators and Refrigerator-Freezers with manual defrost	13.5AV + 299	8.82AV + 248.4
Refrigerator-Freezer – partial automatic defrost	10.4AV + 398	8.82AV + 248.4
Refrigerator-Freezers – automatic defrost with top-mounted freezer without through-the-door ice service and all refrigerators – automatic defrost	16.0AV + 355	9.80AV + 276.0
Refrigerator-Freezers – automatic defrost with side-mounted freezer without through-the-door ice service	11.8 AV + 501	4.91 AV + 507.5
Refrigerator-Freezers – automatic defrost with bottom-mounted freezer	16.5AV + 367	4.60AV + 459.0
Refrigerator-Freezers – automatic defrost with top-mounted freezer with through-the-door ice service	17.6 AV + 391	10.20AV + 356.0
Refrigerator-Freezers – automatic defrost with side-mounted freezer with through-the-door ice service	16.3AV + 527	10.10AV + 406.0
Upright Freezers with manual defrost	10.3AV + 264	7.55AV + 258.3
Upright Freezers with automatic defrost	14.9AV + 391	12.43AV + 326.1
Chest Freezers and all other Freezers except Compact Freezers	11.0AV + 160	9.88AV + 143.7
Compact Refrigerators and Refrigerator-Freezers with manual defrost	13.5AV + 299*	10.70AV + 299.0
Compact Refrigerator-Freezers – partial automatic defrost	10.4AV + 398*	7.00AV + 398.0
Compact Refrigerator-Freezers – automatic defrost with top-mounted freezer and compact all refrigerators – automatic defrost	16.0AV + 355*	12.70AV + 355.0
Compact Refrigerator-Freezers – automatic defrost with side-mounted freezer	11.8 AV + 501*	7.60AV + 501.0
Compact Refrigerator-Freezers – automatic defrost with bottom-mounted freezer	16.5AV + 367*	13.10AV + 367.0
Compact Upright Freezers with manual defrost	10.3AV + 264*	9.78AV + 250.8
Compact Upright Freezers with automatic defrost	14.9AV + 391*	11.40AV + 391.0
Compact Chest Freezers	11.0AV + 160*	10.45AV + 152.0
AV = adjusted total volume, expressed in ft <sup>3</sup> , as determined in 10 CFR, Part 430, Appendices A1 and B1 of Subpart B, which is: [1.44 x freezer volume (ft <sup>3</sup> )] + refrigerator volume (ft <sup>3</sup> ) for refrigerators; [1.63 x freezer volume (ft <sup>3</sup> )] + refrigerator volume (ft <sup>3</sup> ) for refrigerator-freezers; [1.73 x freezer volume (ft <sup>3</sup> )] for freezers.		
*Applicable standards for compact refrigerator products manufactured before July 1, 2001. Compact refrigerator products are not separate product categories under the standards effective January 1, 1993.		

Note: Maximum energy consumption standards for refrigerator-freezers with internal freezers are same as those for refrigerator-freezers with top-mounted freezers.

- (2) See Section 1605.3(a) for energy efficiency and energy design standards for freezers with volume exceeding 30 ft<sup>3</sup> that are consumer products, wine chillers that are consumer products, commercial refrigerators including but not limited to refrigerating bottled or canned beverage vending machines, commercial refrigerator-freezers, and commercial freezers.



## 1605.1

### (b) Room Air Conditioners, Room Air-Conditioning Heat Pumps, Packaged Terminal Air Conditioners, and Packaged Terminal Heat Pumps.

- (1) **Room Air Conditioners and Room Air-Conditioning Heat Pumps.** The EER of room air conditioners and room air-conditioning heat pumps that are manufactured on or after the effective dates shown shall be not less than the applicable values shown in Table B-2. The EER of room air conditioners and room air-conditioning heat pumps that are labeled for use at more than one voltage shall be not less than the applicable values shown in Table B-2 at each of the labeled voltages.

**Table B-2**  
**Standards for Room Air Conditioners and Room Air-Conditioning Heat Pumps**

<i>Appliance</i>	<i>Louvered Sides</i>	<i>Cooling Capacity (Btu/hr)</i>	<i>Minimum EER</i>	
			<i>Effective January 1, 1990</i>	<i>Effective October 1, 2000</i>
Room Air Conditioner	Yes	< 6,000	8.0	9.7
Room Air Conditioner	Yes	≥ 6,000 – 7,999	8.5	9.7
Room Air Conditioner	Yes	≥ 8,000 – 13,999	9.0	9.8
Room Air Conditioner	Yes	≥ 14,000 – 19,999	8.8	9.7
Room Air Conditioner	Yes	≥ 20,000	8.2	8.5
Room Air Conditioner	No	< 6,000	8.0	9.0
Room Air Conditioner	No	≥ 6,000 – 7,999	8.5	9.0
Room Air Conditioner	No	≥ 8,000 – 19,999	8.5	8.5
Room Air Conditioner	No	≥ 20,000	8.2	8.5
Room Air Conditioning Heat Pump	Yes	< 20,000	8.5	9.0
Room Air Conditioning Heat Pump	Yes	≥ 20,000	8.5	8.5
Room Air Conditioning Heat Pump	No	< 14,000	8.0	8.5
Room Air Conditioning Heat Pump	No	≥ 14,000	8.0	8.0
Casement-Only Room Air Conditioner	Either	Any	*	8.7
Casement-Slider Room Air Conditioner	Either	Any	*	9.5
*Casement-only room air conditioners and casement-slider room air conditioners are not separate product classes under standards effective January 1, 1990. Such appliances, if manufactured before October 1, 2000, are subject to the applicable standards in Table B-2 for the other room air conditioners based on capacity and the presence or absence of louvered sides.				

- (2) **Packaged Terminal Air Conditioners and Packaged Terminal Heat Pumps.** The EER and COP, as applicable, of packaged terminal air conditioners and packaged terminal heat pumps shall be not less than the applicable values shown in Table B-3.

**Table B-3**  
**Standards for Packaged Terminal Air Conditioners and Packaged Terminal Heat Pumps**

<i>Appliance</i>	<i>Mode</i>	<i>Cooling Capacity (Btu/hr)</i>	<i>Minimum EER or COP</i>
Packaged terminal air conditioners and packaged terminal heat pumps	Cooling	$\leq 7,000$	8.88 EER
		$> 7,000$ and $< 15,000$	$10.0 - (0.00016 \times \text{Cap.})$ EER
		$\geq 15,000$	7.6 EER
Packaged terminal heat pumps	Heating	Any	$1.3 + [0.16 (10.0 - 0.00016 \times \text{Cap.})]$ COP
Cap. = cooling capacity (Btu/hr)			

(c) **Central Air Conditioners.**

- (1) **Central Air Conditioners Other than Water Source Heat Pumps Below 135,000 Btu/hr.** The ~~energy efficiency ratio~~EER, ~~seasonal energy efficiency ratio~~SEER, ~~coefficient of performance~~COP, and ~~heating seasonal performance factor~~HSPF, as applicable, of all central air conditioners shall be not less than the applicable values shown in Tables C-2, C-3, C-4, and C-5. ~~Table C-4 does not include cooling standards for water source heat pumps less than 135,000 Btu/hr; see Subsection (c)(2)(B).~~

**Table C-2**  
**Standards for Single Phase Air-Cooled Air Conditioners with Cooling Capacity Less than 65,000 Btu per Hour and Single Phase Air-Source Heat Pumps with Cooling Capacity Less than 65,000 Btu per Hour, Not Subject to EPA Act**

1605.1

<i>Appliance</i>	<i>Minimum Efficiency</i>			
	<i>Effective January 1, 1995</i>		<i>Effective January 23, 2006</i>	
	<i>Minimum SEER</i>	<i>Minimum HSPF</i>	<i>Minimum SEER</i>	<i>Minimum HSPF</i>
Split system air conditioners	10.0	—	13.0 <sup>1,2</sup>	—
Split system heat pumps	10.0	6.8	13.0 <sup>1,2</sup>	7.7 <sup>1,2</sup>
Single package air conditioners	9.7	—	13.0 <sup>1,2</sup>	—
Single package heat pumps	9.7	6.6	13.0 <sup>1,2</sup>	7.7 <sup>1</sup>
<sup>1</sup> Except for space constrained products, for which the January 1, 1995 standards remain in effect.  <sup>2</sup> The U.S. Department of Energy has announced its intention to reconsider these values. Should these values be changed in federal regulations, the Commission will change the values in Table C-2 accordingly.				

**Table C-3**  
**Standards for Air-Cooled Air Conditioners and**  
**Air-Source Heat Pumps Subject to EPA Act**

<i>Appliance</i>	<i>Cooling Capacity (Btu/hr)</i>	<i>System Type</i>	<i>Minimum Efficiency</i>
Air-cooled unitary air conditioners and heat pumps (cooling mode)	< 65,000 *	Split system	10.0 SEER
	< 65,000 *	Single package	9.7 SEER
	≥ 65,000 and < 135,000	All	8.9 EER
	≥ 135,000 and < 240,000	All	8.5 EER
Air-cooled unitary air-conditioning heat pumps (heating mode)	< 65,000	Split system	6.8 HSPF
	< 65,000	Single package	6.6 HSPF
	≥ 65,000 and < 135,000	All	3.0 COP at 47° F db
	≥ 135,000 and < 240,000	All	2.9 COP
* Three phase models only.			

**Table C-4**  
**Standards for Evaporatively-Cooled Air Conditioners**

<i>Appliance</i>	<i>Cooling Capacity (Btu per hour)</i>	<i>Minimum EER</i>		
		<i>Effective January 1, 1994</i>	<i>Effective October 29, 2003</i>	<i>Effective October 29, 2004</i>
Evaporatively-cooled air conditioners	< 65,000	9.3	12.1	12.1
	≥ 65,000 and < 135,000	10.5	11.5 <sup>1</sup>	11.5 <sup>1</sup>
	≥ 135,000 < 240,000	9.6	9.6	11.0
<sup>1</sup> Deduct 0.2 from the required EER for units with heating sections other than electric resistance heat.				

**Table C-5**  
**Standards for Water-Cooled Air Conditioners and Water Source Heat Pumps**

<i>Appliance</i>	<i>Cooling Capacity (Btu per hour)</i>	<i>Minimum Efficiency</i>					
		<i>Effective January 1, 1995</i>		<i>Effective October 29, 2003</i>		<i>Effective October 29, 2004</i>	
		<i>Minimum EER</i>	<i>COP</i>	<i>Minimum EER</i>	<i>COP</i>	<i>Minimum EER</i>	<i>COP</i>
Water-cooled air conditioners	< 17,000	9.3	—	12.1	—	12.1	—
Water source heat pumps	< 17,000	9.3	3.8	11.2	4.2	11.2	4.2
Water-cooled air conditioners	≥ 17,000 and < 65,000	9.3	—	12.1	—	12.1	—
Water source heat pumps	≥ 17,000 and < 65,000	9.3	3.8	12.0	4.2	12.0	4.2
Water-cooled air conditioners	≥ 65,000 and < 135,000	10.5	—	11.5 <sup>1</sup>	—	11.5	—
Water source heat pumps	≥ 65,000 and < 135,000	10.5	3.8	12.0	4.2	12.0	4.2
Water-cooled air conditioners	≥ 135,000 and < 240,000	9.6	—	9.6	—	11.0	—
Water source heat pumps	≥ 135,000 and < 240,000	9.6	2.9	9.6	2.9	9.6	2.9
<sup>1</sup> Deduct 0.2 from the required EER for units with heating sections other than electric resistance heat.							

(2) **Water Source Heat Pumps below 135,000 Btu per Hour**

~~(A) Under federal law, the minimum EER~~

~~(i) for water source heat pumps less than 65,000 Btu/hr rated cooling capacity, is 9.3 and~~

~~(ii) for water source heat pumps at least 65,000 Btu/hr rated cooling capacity, and less than 135,000 Btu/hr rated cooling capacity, is 10.5.~~

~~California has another standard for water source heat pumps less than 65,000 Btu/hr, which is not preempted by federal law. The California standard for water source heat pumps equal to or greater than 65,000 Btu/hr and less than 135,000 Btu/hr is identical to the federal standards shown in Table C-5. The California standard for water source heat pumps less than 65,000 Btu/hr and which is shown in Table C-7 in Section 1605.3(c)(1). Table C-7 in Section 1605.3(e)(1).~~

~~(B)The minimum COP in the heating mode for water source heat pumps less than 135,000 Btu/hr (cooling capacity) shall be 3.8 [at a standard rating condition of 70° F entering water (water flow rate per manufacturer's specifications)].~~

- (3) **Gas-fired Air Conditioners and Heat Pumps.** There is no energy efficiency standard or energy design standard for gas-fired air conditioners or gas-fired heat pumps.
- (4) **Other Central Air Conditioners.** See Sections 1605.2(c) and 1605.3(c) for energy efficiency standards for other central air conditioners.

(d) **Spot Air Conditioners.**

There is no energy efficiency standard or energy design standard for spot air conditioners.

(e) **Gas and Oil Space Heaters.**

- (1) **Gas Wall Furnaces, Gas Floor Furnaces, and Gas Room Heaters.** The AFUE of gas wall furnaces, gas floor furnaces, and gas room heaters shall be not less than the applicable values shown in Table E-2.

**Table E-2**  
**Standards for Gas Wall Furnaces, Floor Furnaces, and Room Heaters**

<i>Appliance</i>	<i>Design Type</i>	<i>Capacity (Btu per hour)</i>	<i>Minimum AFUE (%)</i>
Wall furnace	Fan	≤ 42,000	73
Wall furnace	Fan	> 42,000	74
Wall furnace	Gravity	≤ 10,000	59
Wall furnace	Gravity	> 10,000 ≤ 12,000	60
Wall furnace	Gravity	> 12,000 ≤ 15,000	61
Wall furnace	Gravity	> 15,000 ≤ 19,000	62
Wall furnace	Gravity	> 19,000 ≤ 27,000	63
Wall furnace	Gravity	> 27,000 ≤ 46,000	64
Wall furnace	Gravity	> 46,000	65
Floor furnace	All	≤ 37,000	56
Floor furnace	All	> 37,000	57
Room heater	All	≤ 18,000	57
Room heater	All	> 18,000 and ≤ 20,000	58
Room heater	All	> 20,000 and ≤ 27,000	63
Room heater	All	> 27,000 and ≤ 46,000	64

**1605.1**

Room heater	All	> 46,000	65
-------------	-----	----------	----

- (2) **Central Gas Furnaces, Central Gas Boilers, Central Oil Furnaces, and Central Oil Boilers.** The AFUE, thermal efficiency, and combustion efficiency, as applicable, of central gas furnaces, central gas boilers, central oil furnaces, and central oil boilers shall be not less than the applicable values shown in Tables E-3 and E-4.

**Table E-3**  
**Standards for Gas- and Oil-Fired Central Boilers**

<i>Appliance</i>	<i>Rated Input (Btu/hr)</i>	<i>Minimum Efficiency (%)</i>	
		<i>AFUE</i>	<i>Combustion Efficiency at Maximum Rated Capacity</i>
Gas steam boilers with single phase electrical supply	< 300,000	75	—
All other boilers with single phase electrical supply	< 300,000	80	—
Gas packaged boilers	≥ 300,000	—	80
Oil packaged boilers	≥ 300,000	—	83

**Table E-4**  
**Standards for Gas- and Oil-Fired Central Furnaces**

<i>Appliance</i>	<i>Rated Input (Btu/hr)</i>	<i>Minimum Efficiency (%)</i>	
		<i>AFUE</i>	<i>Thermal Efficiency</i>
Mobile home gas and oil central furnaces with single phase electrical supply	< 225,000	75	—
All other gas and oil central furnaces with single phase electrical supply	< 225,000	78	—
Gas central furnaces	≥ 225,000	—	80
Oil central furnaces	≥ 225,000	—	81

- (3) **Infrared Gas Space Heaters.** There is no energy efficiency standard or energy design standard for infrared gas space heaters.
- (4) **Other Gas and Oil Space Heaters.** See Section 1605.3(e) for standards for boilers, central furnaces, duct furnaces, and unit heaters that are not federally-regulated consumer products or federally-regulated commercial and industrial equipment.



## 1605.1

### (f) Water Heaters.

- (1) **Large Water Heaters.** The thermal efficiency and standby loss of large water heaters manufactured during the applicable time period shall be not less than the applicable values shown in Tables F-2, F-3, and F-4.

**Table F-2**  
**Standards for Large Water Heaters**  
**(Effective January 1, 1994 through October 28, 2003)**

<i>Fuel</i>	<i>Input Rating</i>	<i>Volume (gallons)</i>	<i>Input to Volume Ratio (Btu/gal)</i>	<i>Minimum Thermal Efficiency (%)</i>	<i>Maximum Standby Loss (%/hour)<sup>1</sup></i>
Gas	> 75,000 and ≤ 155,000 (Btu/hour)	All	< 4,000	78	$1.3 + 114/V$
Oil	> 105,000 and ≤ 155,000 (Btu/hour)	All	< 4,000	78	$1.3 + 114/V$
Gas, oil	> 155,000 (Btu/hour)	≤ 140	< 4,000	78	$1.3 + 95/V$
Gas, oil	> 155,000 (Btu/hour)	> 140	< 4,000	78	$1.3 + 95/V^2$
Gas	> 200,000 (Btu/hour)	< 10	≥ 4,000	80	—
Oil	> 210,000 (Btu/hour)	< 10	≥ 4,000	80	—
Gas	> 200,000 (Btu/hour)	≥ 10	≥ 4,000	77	$2.3 + 67/V$
Oil	> 210,000 (Btu/hour)	≥ 10	≥ 4,000	77	$2.3 + 67/V$
Electric	> 12 kW	≤ 140	< 4,000	—	$0.3 + 27/V$
Electric	> 12 kW	> 140	< 4,000	—	$0.3 + 27/V^2$
Electric	> 12 kW	< 10	≥ 4,000	80	—
Electric	> 12 kW	≥ 10	≥ 4,000	77	$2.3 + 67/V$
<sup>1</sup> Volume (V) = measured storage volume in gallons					
<sup>2</sup> Storage-type water heaters with volume exceeding 140 gallons need not meet the standby loss requirement if they are thermally insulated to at least R-12.5 and if a standing pilot light is not used.					

**Table F-3**  
**Standards for Large Water Heaters**  
**(New Standards Effective October 29, 2003)**

<i>Appliance</i>	<i>Category</i>	<i>Size or Rating</i>	<i>Minimum Thermal Efficiency (%)</i>	<i>Maximum Standby Loss<sup>1,2</sup></i>
Gas storage water heaters	< 4,000 Btu/hr/gal	≤ 155,000 Btu/hr	80	$Q/800 + 110\sqrt{V}$ Btu/hr
		> 155,000 Btu/hr	80	$Q/800 + 110\sqrt{V}$ Btu/hr
Gas instantaneous water heaters	≥ 4,000 Btu/hr/gal	≥ 10 gal	80	$Q/800 + 110\sqrt{V}$ Btu/hr
Oil storage water heaters	< 4,000 Btu/hr/gal	≤ 155,000 Btu/hr	78	$Q/800 + 110\sqrt{V}$ Btu/hr
		> 155,000 Btu/hr	78	$Q/800 + 110\sqrt{V}$ Btu/hr
Oil instantaneous water heaters	≥ 4,000 Btu/hr/gal	< 10 gal	80	—
		≥ 10 gal	78	$Q/800 + 110\sqrt{V}$ Btu/hr
Gas hot water supply boilers	≥ 4,000 Btu/hr/gal	≥ 10 gal	80	$Q/800 + 110\sqrt{V}$ Btu/hr
Oil hot water supply boilers	≥ 4,000 Btu/hr/gal	≥ 10 gal	78	$Q/800 + 110\sqrt{V}$ Btu/hr
Electric water heaters	All	All	No requirement	$0.30 + 27/V$ % Per hour
<sup>1</sup> Standby loss is based on a 70° temperature difference between stored water and ambient requirements. In the standby loss equations, V is the rated volume in gallons, and Q is the nameplate input rate in Btu/hr.  <sup>2</sup> Water heaters and hot water supply boilers having more than 140 gallons of storage capacity are not required to meet the standby loss requirement if the tank surface is thermally insulated to R-12.5, if a standing pilot light is not installed, and for gas- or oil-fired storage water heaters, there is a flue damper or fan-assisted combustion.				

**Table F-4**  
**Standards for Large Water Heaters**  
**(Existing Standards Remaining in Effect On and After October 29, 2003)**

<i>Fuel</i>	<i>Input Rating</i>	<i>Volume (gallons)</i>	<i>Input to Volume Ratio (Btu/gal)</i>	<i>Minimum Thermal Efficiency (%)</i>	<i>Maximum Standby Loss (%/hour)<sup>1,2</sup></i>
Gas	> 200,000 (Btu/hour)	< 10	$\geq 4,000$	80	Not applicable
Electric	> 12 kW	$\leq 140$	< 4,000	Not applicable	$0.3 + 27/V$
Electric	> 12 kW	> 140	< 4,000	Not applicable	$0.3 + 27/V$
Electric	> 12 kW	< 10	$\geq 4,000$	80	Not applicable
Electric	> 12 kW	$\geq 10$	$\geq 4,000$	77	$2.3 + 67/V$
<sup>1</sup> Volume (V) = measured storage volume in gallons <sup>2</sup> Storage-type water heaters with volume exceeding 140 gallons need not meet the standby loss requirement if they are thermally-insulated to at least R-12.5 and if a standing pilot light is not used.					

- (2) **Small Water Heaters.** The energy factor of all small water heaters that are federally-regulated consumer products, (other than booster water heaters, hot water dispensers, mini-tank electric water heaters, and heat pump water heaters) shall be not less than the applicable values shown in Table F-5.

**Table F-5**  
**Standards for Small Federally-Regulated Water Heaters**

<i>Appliance</i>	<i>Minimum Energy Factor</i>	
	<i>Effective April 15, 1991</i>	<i>Effective January 20, 2004</i>
Gas-fired storage-type water heaters	$0.62 - (.0019 \times V)$	$0.67 - (.0019 \times V)$
Oil-fired water heaters (storage and instantaneous)	$0.59 - (.0019 \times V)$	$0.59 - (.0019 \times V)$
Electric storage water heaters (excluding tabletop water heaters)	$0.93 - (.00132 \times V)$	$0.97 - (.00132 \times V)$
Electric tabletop water heaters	$0.93 - (.00132 \times V)$	$0.93 - (.00132 \times V)$
Gas-fired instantaneous water heaters	$0.62 - (.0019 \times V)$	$0.62 - (.0019 \times V)$
Electric instantaneous water heaters (excluding tabletop water heaters)	$0.93 - (.00132 \times V)$	$0.93 - (.00132 \times V)$
Heat pump water heaters	$0.93 - (.00132 \times V)$	$0.97 - (.00132 \times V)$
V = rated volume in gallons.		

- (3) **Booster Water Heaters, Hot Water Dispensers, And Mini-Tank Electric Water Heaters.** There is no energy efficiency standard or energy design standard for booster water heaters, hot water dispensers, or mini-tank electric water heaters.
- (4) **Other Water Heaters.** See Section 1605.3(f) for standards for other water heaters.
- (5) **Combination Space-Heating and Water-Heating Appliances.** See Section 1605.3(e) for standards for combination space-heating and water-heating appliances.

(g) **Pool Heaters.**

- (1) **Energy Efficiency Standard for Gas-Fired Pool Heaters and Oil-Fired Pool Heaters.** The thermal efficiency of gas-fired pool heaters and oil-fired pool heaters shall be not less than 78 percent.
- (2) **Energy Efficiency Standards for Heat Pump Pool Heaters.** See Section 1605.3(g) for energy efficiency standards for heat pump pool heaters.
- (3) **Energy Efficiency Standard for Electric Resistance Pool Heaters.** There is no energy efficiency standard for electric resistance pool heaters.
- (4) **Energy Design Standards for Pool Heaters.** See Section 1605.3(g) for energy design standards for pool heaters.

(h) **Plumbing Fittings.**

- (1) **Plumbing Fittings Except Tub Spout Diverters.** The flow rate of showerheads, lavatory faucets, kitchen faucets, lavatory replacement aerators, kitchen replacement aerators, wash fountains, and metering faucets shall be not greater than the applicable values shown in Table H-1.

**Table H-1**  
**Standards for Plumbing Fittings**

<i>Appliance</i>	<i>Maximum Flow Rate</i>
Showerheads	2.5 gpm at 80 psi
Lavatory faucets	2.2 gpm at 60 psi
Kitchen faucets	2.2 gpm at 60 psi
Replacement aerators	2.2 gpm at 60 psi
Wash fountains	$2.2 \times \frac{\text{rim space (inches)}}{20}$ gpm at 60 psi
Metering faucets	0.25 gallons/cycle

~~(2) Tub Spout Diverters. See Section 1605.3(h) for standards for tub spout diverters.~~

~~(3)~~(2) **Showerhead-Tub Spout Diverter Combinations.** Showerhead-tub spout diverter combinations shall meet both the standard for showerheads and the standard for tub spout diverters.

(3) **Tub Spout Diverters.** See Section 1605.3(h) for standards for tub spout diverters.

(i) **Plumbing Fixtures.**

The water consumption of water closets and urinals shall be not greater than the values shown in Table I.

**Table I**  
**Standards for Plumbing Fixtures**

<i>Appliance</i>	<i>Maximum Gallons per Flush</i>
Gravity tank-type water closets	1.6
Flushometer tank water closets	1.6
Electromechanical hydraulic water closets	1.6
Blowout water closets	3.5
Trough-type urinals	<u>trough length (inches)</u> 16
Other urinals	1.0

(j) **Fluorescent Lamp Ballasts and Replacement Fluorescent Lamp Ballasts.**

(1) The ballast efficacy factor of

- (A) replacement fluorescent lamp ballasts manufactured on or before June 30, 2010;
- (B) fluorescent lamp ballasts manufactured on or after January 1, 1990;
- (C) fluorescent lamp ballasts sold by the manufacturer on or after April 1, 1990; and
- (D) fluorescent lamp ballasts incorporated into a luminaire by a luminaire manufacturer on or after April 1, 1991; shall be not less than the applicable values shown in Table J-1, except that fluorescent lamp ballasts (1) designed for dimming, (2) designed for use in ambient temperatures of 0° F or less, or (3) with a power factor of less than 0.90 and designed for use only in residential buildings are excluded.

**Table J-1**  
**Standards for Fluorescent Lamp Ballasts and Replacement Fluorescent Lamp Ballasts**

<i>Application for Operation of</i>	<i>Ballast Input Voltage</i>	<i>Total Nominal Lamp Watts</i>	<i>Minimum Ballast Efficacy Factor</i>
one F40T12 lamp	120 or 277	40	1.805
two F40T12 lamps	120	80	1.060
	277	80	1.050
two F96T12 lamps	120 or 277	150	0.570
two F96T12HO lamps	120 or 277	220	0.390

(2) The ballast efficacy factor of

- (A) fluorescent lamp ballasts manufactured on or after April 1, 2005;
- (B) fluorescent lamp ballasts sold by the manufacturer on or after July 1, 2005;
- (C) replacement fluorescent lamp ballasts manufactured after June 30, 2010; and
- (D) fluorescent lamp ballasts incorporated into a luminaire by a luminaire manufacturer on or after April 1, 2006; shall be not less than the applicable values shown in Table J-2 except that fluorescent lamp ballasts (1) designed for dimming to 50 percent or less of maximum output, (2) designed for use with two F96T12HO lamps at ambient temperatures of  $-20^{\circ}$  F or less and for use in an outdoor sign, (3) with a power factor of less than 0.90 and designed and labeled for use only in residential buildings, or (4) designated as a replacement ballast as defined in Section 1602(j) are excluded.

**Table J-2**  
**Standards for Fluorescent Lamp Ballasts**

<i>Application for Operation of</i>	<i>Ballast Input Voltage</i>	<i>Total Nominal Lamp Watts</i>	<i>Minimum Ballast Efficacy Factor</i>
one F40T12 lamp	120 or 277	40	2.29
two F40T12 lamps	120 or 277	80	1.17
two F96T12 lamps	120 or 277	150	0.63
two F96T12HO lamps	120 or 277	220	0.39

**1605.1**

- (3) All fluorescent lamp ballasts covered by paragraphs (1) or (2) except replacement fluorescent lamp ballasts, shall have a power factor of 0.90 or greater.
- (4) There are no energy efficiency standards or energy design standards for ballasts designed to operate T5 lamps, T8 lamps, three T12 lamps, or four T12 lamps.

**(k) Lamps.**

- (1) **General Service Fluorescent Lamps That Are Federally-Regulated Appliances.** The average lamp efficacy and the color rendering index of general service fluorescent lamps shall be not less than the applicable values shown in Table K-1.

**Table K-1**  
**Standards for General Service Fluorescent Lamps**

<i>Appliance</i>	<i>Nominal Lamp Wattage</i>	<i>Minimum Color Rendering Index (CRI)</i>	<i>Minimum Average Lamp Efficacy (LPW)</i>
4-foot medium bi-pin lamps	> 35	69	75.0
	≤ 35	45	75.0
2-foot U-shaped lamps	> 35	69	68.0
	≤ 35	45	64.0
8-foot slimline lamps	> 65	69	80.0
	≤ 65	45	80.0
8-foot high output lamps	> 100	69	80.0
	≤ 100	45	80.0

- (2) **Incandescent Reflector Lamps That Are Federally-Regulated Appliances.** The average lamp efficacy of incandescent reflector lamps shall be not less than the applicable values shown in Table K-2.

**Table K-2**  
**Standards for Incandescent Reflector Lamps**

<i>Nominal Lamp Wattage</i>	<i>Minimum Average Lamp Efficacy (LPW)</i>
40-50	10.5
51-66	11.0
67-85	12.5
86-115	14.0
116-155	14.5
156-205	15.0





## 1605.1

### (l) **Emergency Lighting.**

See Section 1605.3(l) for energy efficiency standards for illuminated exit signs.

### (m) **Traffic Signal Modules and Traffic Signal Lamps.**

See Section 1605.3(m) for energy efficiency standards for traffic signal modules and traffic signal lamps.

### (n) **Luminaires.**

See Section 1605.3(n) for [energy efficiency standards and](#) energy design standards for torchieres.

### (o) **Dishwashers.**

The energy factor of dishwashers that are consumer products shall be not less than the applicable values shown in Table O.

**Table O**  
**Standards for Dishwashers**

<i>Appliance</i>	<i>Minimum Energy Factor (cycles/kWh)</i>
Compact dishwashers	0.62
Standard dishwashers	0.46

### (p) **Clothes Washers.**

- (1) **Energy Efficiency Standards for Clothes Washers.** The energy factor and modified energy factor of clothes washers that are consumer products shall be not less than the applicable values shown in Table P-2.

**Table P-2**  
**Standards for Clothes Washers**

<i>Appliance</i>	<i>Minimum Energy Factor [ft<sup>3</sup>/(kWh/cycle)] Effective May 14, 1994</i>	<i>Minimum Modified Energy Factor [ft<sup>3</sup>/(kWh/cycle)]</i>	
		<i>Effective January 1, 2004</i>	<i>Effective January 1, 2007</i>
Top-loading compact clothes washers	0.90	0.65	0.65
Top-loading standard clothes washers	1.18	1.04	1.26
Front-loading clothes washers	N/A	1.04	1.26

- (2) **Energy Design Standard for Top-Loading Semi-Automatic Clothes Washers and Suds-Saving Clothes Washers.** Top-loading semi-automatic clothes washers that are consumer products and suds-saving clothes washers that are consumer products shall have an unheated rinse water option.
- (3) **Energy Design Standard for Front-Loading Clothes Washers.** Until December 31, 2003, front-loading clothes washers that are consumer products shall have an unheated rinse water option.
- (4) **Clothes Washers that are Not Consumer Products.** See Section 1605.3(p) for energy efficiency standards and energy design standards for clothes washers that are not consumer products.

(q) **Clothes Dryers.**

- (1) **Energy Efficiency Standards for Gas Clothes Dryers and Electric Clothes Dryers.** The energy factor of gas clothes dryers that are consumer products and electric clothes dryers that are consumer products shall be not less than the applicable values shown in Table Q.

**Table Q**  
**Standards for Clothes Dryers**

<i>Appliance</i>	<i>Minimum Energy Factor (lbs/kWh)</i>
Electric, standard clothes dryers	3.01
Electric, compact, 120 volt clothes dryers	3.13
Electric, compact, 240 volt clothes dryers	2.90
Gas clothes dryers	2.67

- (2) **Energy Design Standard for Gas Clothes Dryers.** Gas clothes dryers that are consumer products shall not be equipped with a constant burning pilot.

(r) **Cooking Products and Food Service Equipment.**

- (1) **Energy Design Standard for Gas Cooking Products with an Electrical Supply Cord.** Gas cooking products that are consumer products and that are equipped with an electrical supply cord shall not be equipped with a constant burning pilot.
- (2) **Other Cooking Products and Food Service Equipment.** There is no energy efficiency standard or energy design standard for other cooking products or for food service equipment.

(s) **Electric Motors.**

- (1) Except as provided in paragraph (2) of this subsection, the nominal full-load efficiency of all electric motors that are [federally-regulated](#) commercial and industrial equipment shall be not less than the applicable values shown in Table S.

**Table S**  
**Standards for Electric Motors**

<i><b>Motor Horsepower</b></i>	<i><b>Minimum Nominal Full-Load Efficiency</b></i>					
	<i><b>Open Motors</b></i>			<i><b>Closed Motors</b></i>		
	<i><b>6 poles</b></i>	<i><b>4 poles</b></i>	<i><b>2 poles</b></i>	<i><b>6 poles</b></i>	<i><b>4 poles</b></i>	<i><b>2 poles</b></i>
≥1 <1.5	80.0	82.5	...	80.0	82.5	75.5
≥1.5 <2	84.0	84.0	82.5	85.5	84.0	82.5
≥2 <3	85.5	84.0	84.0	86.5	84.0	84.0
≥3 <5	86.5	86.5	84.0	87.5	87.5	85.5
≥5 <7.5	87.5	87.5	85.5	87.5	87.5	87.5
≥7.5 <10	88.5	88.5	87.5	89.5	89.5	88.5
≥10 <15	90.2	89.5	88.5	89.5	89.5	89.5
≥15 <20	90.2	91.0	89.5	90.2	91.0	90.2
≥20 <25	91.0	91.0	90.2	90.2	91.0	90.2
≥25 <30	91.7	91.7	91.0	91.7	92.4	91.0
≥30 <40	92.4	92.4	91.0	91.7	92.4	91.0
≥40 <50	93.0	93.0	91.7	93.0	93.0	91.7
≥50 <60	93.0	93.0	92.4	93.0	93.0	92.4
≥60 <75	93.6	93.6	93.0	93.6	93.6	93.0
≥75 <100	93.6	94.1	93.0	93.6	94.1	93.0
≥100 <125	94.1	94.1	93.0	94.1	94.5	93.6
≥125 <150	94.1	94.5	93.6	94.1	94.5	94.5
≥150 <200	94.5	95.0	93.6	95.0	95.0	94.5
200	94.5	95.0	94.5	95.0	95.0	95.0

- (2) The standards in this subsection do not apply to electric motors that are (A) installed and sold within another appliance that is within the scope of this Article or (B) installed in low-rise residential buildings.

(t) **Distribution Transformers.**

See Section 1605.3(t) for energy efficiency standards for distribution transformers.

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.

Reference: Sections 25402(c) and 25960, Public Resources Code.



**Section 1605.2. State Standards for Federally-Regulated Appliances: Standards Applicable To Both Sale (California Enforcement) and to Title 24 Construction (California Enforcement).**

Each standard in this Section takes effect on:

- (1) the effective date of a waiver from federal preemption granted by the U.S. Department of Energy for the standard; or
- (2) one year after removal of federal preemption by action such as a change in federal law, but no earlier than July 1, 2004.

The standards in this Section are exclusively state law. They are not enforced by the U.S. Department of Energy. Under state law, as described in Section 1608 and enforced by the ~~California Energy~~ Commission and local building departments, no appliance may be sold or offered for sale in California, or installed in Title 24 construction, unless the appliance complies with the applicable standard in this Section as determined using the applicable test method listed in Section 1604 (and with all the other requirements of this Article).

**(a) Refrigerators, Refrigerator-Freezers and Freezers.**

See Sections 1605.1(a) and 1605.3(a) for energy efficiency standards and energy design standards for refrigerators, refrigerator-freezers, and freezers.

**(b) Room Air Conditioners, Room Air Conditioning Heat Pumps, Packaged Terminal Air Conditioners, and Packaged Terminal Heat Pumps.**

See Section 1605.1(b) for energy efficiency standards for room air conditioners, room air-conditioning heat pumps, packaged terminal air conditioners, and packaged terminal heat pumps [that are federally-regulated consumer products or federally-regulated commercial and industrial equipment](#).

**(c) Central Air Conditioners.**

**(1) Energy Efficiency Standards for Air-Cooled Air Conditioners and Air-Source Heat Pumps.**

(A) The EER, SEER, HSPF, and COP of air-cooled air conditioners and air-source heat pumps shall be not less than the applicable values shown in Table C-6.

(B) Each appliance of a type and cooling capacity covered by Table C-6 shall be equipped with a ~~thermostatic expansion valve (TXV)~~.

EXCEPTION 1 to Section 1605.2(c)(1)(B): Instead of installing a TXV, a manufacturer may install any other device that is certified by the manufacturer to the Executive Director to result in an EER that is within 90 percent of the rated EER when tested at all of the following conditions:

## 1605.2

1. Refrigerant charge at 70 percent of the refrigerant charge specified by the manufacturer of the appliance.
2. Refrigerant charge at 120 percent of the refrigerant charge specified by the manufacturer of the appliance.
3. Airflow at 80 percent of the airflow specified by the manufacturer of the appliance.

EXCEPTION 2 to [Section](#) 1605.2 (c)(1)(B): Instead of installing a TXV, a manufacturer may install a sensing mechanism integral to the compressor-containing unit, and a signaling device installed on the outside of the compressor-containing unit that is certified by the manufacturer to perform all of the following:

1. The device shall produce a visible malfunction signal whenever the refrigerant charge is less than 90 percent or greater than 120 percent of the refrigerant charge specified by the manufacturer.
2. The device shall not produce a malfunction signal when the refrigerant charge is between 95 percent and 115 percent of the refrigerant charge specified by the manufacturer.
3. The device shall produce a visible indication of proper charge whenever it is not producing a malfunction signal.
4. The device shall produce visible signals in a form that is accessible to, and readily understood by individuals with no technical training.
5. The device shall perform its tests and meet the above criteria at least once per every 10 hours of air conditioner run time.
6. The device shall provide a visible signal ~~shall~~[that](#) [indicates](#) the status of the refrigerant charge as of the time of the last test.

EXCEPTION 3 to [Section](#) 1605.2 (c) (1)(B): Instead of installing a TXV, a manufacturer may install a device whose performance is determined by the Executive Director to be equivalent in energy savings to a TXV.

**Table C-6**  
**Standards for Air-Cooled Air Conditioners and Air-Source Heat Pumps**

<i>Appliance</i>	<i>Cooling Capacity (Btu/hr)</i>	<i>Minimum Standards</i>	
		<i>Up to December 31, 2005</i>	<i>From January 1, 2006</i>
<del>Air-cooled air conditioners</del>	<del>&lt; 65,000</del>	<del>11.3 EER 13.0 SEER</del>	<del>11.6 EER 13.0 SEER</del>
<del>Air-source heat pumps</del>	<del>&lt; 65,000</del>	<del>11.3 EER 13.0 SEER 7.9 HSPF</del>	<del>11.6 EER 13.0 SEER 7.9 HSPF</del>
<u>Single package air-cooled air conditioners</u>	<u>&lt; 65,000</u>	<u>11.0 EER 13.0 SEER</u>	<u>11.0 EER 13.0 SEER</u>
<u>Other air-cooled air conditioners</u>	<u>&lt; 65,000</u>	<u>11.3 EER 13.0 SEER</u>	<u>11.6 EER 13.0 SEER</u>
<u>Single package air-cooled heat pumps</u>	<u>&lt; 65,000</u>	<u>11.0 EER 13.0 SEER 7.3 HSPF</u>	<u>11.0 EER 13.0 SEER 7.3 HSPF</u>
<u>Other air-cooled heat pumps</u>	<u>&lt; 65,000</u>	<u>11.3 EER 13.0 SEER 7.9 HSPF</u>	<u>11.6 EER 13.0 SEER 7.9 HSPF</u>
Air-cooled air conditioners	$\geq 65,000$ and $< 135,000$	11.0 EER	11.0 EER
Air-source heat pumps	$\geq 65,000$ and $< 135,000$	11.0 EER 3.4 at 47° F. COP 2.4 at 17° F. COP	11.0 EER 3.4 at 47° F. COP 2.4 at 17° F. COP
Air-cooled air conditioners	$\geq 135,000$ and $< 240,000$	10.8 EER	10.8 EER
Air-source heat pumps	$\geq 135,000$ and $< 240,000$	10.8 EER 3.3 at 47° F. COP 2.2 at 17° F. COP	10.8 EER 3.3 at 47° F. COP 2.2 at 17° F. COP

- (2) See Sections 1605.1(c) and 1605.3(c) for other energy efficiency standards for these and other central air conditioners.

(3) **Gas-fired Air Conditioners and Heat Pumps.** There is no energy efficiency standard or energy design standard for gas-fired air conditioners or gas-fired heat pumps.

- (d) **Spot Air Conditioners.**

There is no energy efficiency standard or energy design standard for spot air conditioners.



## 1605.2

### (e) **Gas and Oil Space Heaters.**

(1) See Sections 1605.1(e) and 1605.3(e) for energy efficiency standards for gas and oil space heaters.

(2) See Section 1605.3(e) for standards for combination space-heating and water-heating appliances.

### (f) **Water Heaters.**

(1) See Sections 1605.1(f) and 1605.3(f) for energy efficiency standards for water heaters.

(2) See Section 1605.3(e) for energy efficiency standards for combination space-heating and water-heating appliances.

### (g) **Pool Heaters.**

See Sections 1605.1(g) and 1605.3(g) for energy efficiency standards and energy design standards for pool heaters.

### (h) **Plumbing Fittings.**

See Sections 1605.1(h) and 1605.3(h) for water efficiency standards for plumbing fittings.

### (i) **Plumbing Fixtures.**

See Section 1605.1(i) for water efficiency standards for plumbing fixtures.

### (j) **Fluorescent Lamp Ballasts.**

See Section 1605.1(j) for energy efficiency standards for fluorescent lamp ballasts.

### (k) **Lamps.**

See Section 1605.1(k) for energy efficiency standards for lamps.

### (l) **Emergency Lighting.**

See Section 1605.3(l) for energy efficiency standards for ~~emergency lighting~~[illuminated exit signs](#).

### (m) **Traffic Signal Modules and Traffic Signal Lamps.**

See Section 1605.3(m) for energy efficiency standards for traffic signal modules and traffic signal lamps.

### (n) **Luminaires.**

See Section 1605.3(n) for energy efficiency standards and energy design standards for ~~luminaires~~[torchieres](#).

(o) **Dishwashers.**

See Section 1605.1(o) for energy efficiency standards for dishwashers.

(p) **Clothes Washers.**

See Sections 1605.1(p) and 1605.3(p) for energy efficiency standards [and energy design standards](#) for clothes washers.

(q) **Clothes Dryers.**

See Section 1605.1(q) for energy efficiency standards [and energy design standards](#) for clothes dryers.

(r) **Cooking Products and Food Service Equipment.**

[\(1\)](#) There is no energy efficiency standard for cooking products or food service equipment.

[\(2\)](#) See Section 1605.1(r) for energy design standards for cooking products.

(s) **Electric Motors.**

See Section 1605.1(s) for energy efficiency standards for electric motors.

(t) **Distribution Transformers.**

See Section 1605.3(t) for energy efficiency standards for distribution transformers.

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
Reference: Sections 25402(c) and 25960, Public Resources Code.



**Section 1605.3. State Standards for Non-Federally-Regulated Appliances: Standards Applicable To Both Sale (California Enforcement) and to Title 24 Construction (California Enforcement).**

The standards in this Section are exclusively state law. They are not enforced by the U.S. Department of Energy. Under state law, as described in Section 1608 and enforced by the ~~California Energy~~ Commission and local building departments, no appliance may be sold or offered for sale in California, or installed in Title 24 construction, unless the appliance complies with the applicable standard in this Section as determined using the applicable test method listed in Section 1604 (and with all the other requirements of this Article).

**(a) Refrigerators, Refrigerator-Freezers, and Freezers.**

- (1) Energy Efficiency Standard for Wine Chillers. The energy consumption of wine chillers designed and sold for use by an individual shall be no greater than the applicable values shown in Table A-4.

**Table A-4**  
**Standards for Wine Chillers**

<u>Appliance</u>	<u>Maximum Annual Energy Consumption (kWh)</u>
<u>Wine chillers with manual defrost</u>	<u><math>13.7V + 267</math></u>
<u>Wine chillers with automatic defrost</u>	<u><math>17.4V + 344</math></u>
<u><math>V = \text{volume in ft}^3</math></u>	

- ~~(1) **Energy Efficiency Standard for Wine Chillers.** The maximum annual energy consumption of wine chillers designed and sold for use by an individual shall be no greater than the value resulting from the equation  $[13.7V + 267]$  kWh, where V is volume in cubic feet.~~

- (2) **Energy Efficiency Standard for Freezers.** The energy consumption of freezers, exceeding 30 ft<sup>3</sup> and not exceeding 39 ft<sup>3</sup>, manufactured ~~12 months after adoption by the Commission on~~ or after March 1, 2003, shall be no greater than the applicable values shown in Table A-~~4~~5.

**Table A-~~4~~5**  
**Standards for Freezers**

<i>Appliance</i>	<i>Maximum Annual Energy Consumption (kWh)</i>
Upright Freezers with manual defrost	$7.55AV + 258.3$
Upright Freezers with automatic defrost	$12.43AV + 326.1$
Chest Freezers	$9.88AV + 143.7$
AV = adjusted total volume, expressed in ft <sup>3</sup> , which is 1.73 x freezer volume (ft <sup>3</sup> ).	

### 1605.3

- (3) **Energy Design Standard.** Internal illumination of the following appliances, manufactured ~~12 months after adoption by the Commission~~ on or after March 1, 2003, shall be only by (1) T-8 fluorescent lamps with electronic ballasts, or (2) a lighting system that has no fewer lumens per watt than a system using only T-8 fluorescent lamps with electronic ballasts.
- (A) refrigerating bottled or canned beverage vending machines;
- (B) reach-in cabinets, pass-through cabinets, and roll-in or roll-through cabinets, with transparent doors; and
- (C) wine chillers that are not consumer products.
- (4) **Energy Efficiency Standard.** The daily energy consumption of reach-in cabinets, pass-through cabinets, roll-in or roll-through cabinets, and wine chillers that are not consumer products, manufactured on or after the applicable dates shown in Table A-~~56~~, shall be no greater than the applicable values shown in Table A-~~56~~.
- (5) **Appliances Covered.**
- (A) Reach-in cabinets include but are not limited to ice cream cabinets; milk or beverage cabinets; and milk, beverage, and ice cream cabinets.
- (B) The appliances listed in paragraphs (3) and (4) and Table A-~~56~~ do not include preparation tables, refrigerated buffet and preparation tables, or work top tables.

**Table A-~~56~~**  
**Standards ~~F~~or Reach-In Cabinets, Pass-Through Cabinets,**  
**Roll-In Or Roll-Through Cabinets, and Wine Chillers that are Not Consumer Products**

<i>Appliance</i>	<i>Doors</i>	<i>Maximum Daily Energy Consumption(kWh)</i>	
		<del>12 Months After Adoption by the Commission</del> <u>March 1, 2003</u>	<i>August 1, 2004</i>
Reach-in cabinets, pass-through cabinets, and roll-in or roll-through cabinets that are refrigerators; and wine chillers that are not consumer products	Solid	0.125V + 4.22	0.125V + 2.76
	Transparent	0.172V + 5.78	0.172V + 4.77
Reach-in cabinets, pass-through cabinets, and roll-in or roll-through cabinets that are freezers	Solid	0.398V + 2.83	0.398V + 2.28
	Transparent	0.940V + 5.10	0.940V + 5.10
Reach-in cabinets that are refrigerator-freezers	Solid	0.273AV + 2.63	0.273AV + 1.65

$V$  = total volume (ft<sup>3</sup>)

$AV$  = Adjusted Volume =  $[1.63 \times \text{freezer volume (ft}^3\text{)}] + \text{refrigerator volume (ft}^3\text{)}$

- (6) See Section 1605.1(a) for energy efficiency standards for refrigerators, refrigerator-freezers, and freezers that are federally-regulated consumer products.

(b) **Room Air Conditioners, Room Air-Conditioning Heat Pumps, Packaged Terminal Air Conditioners, and Packaged Terminal Heat Pumps.**

See Section 1605.1(b) for energy efficiency standards for room air conditioners, room air conditioning heat pumps, packaged terminal air conditioners, and packaged terminal heat pumps [that are federally-regulated consumer products or federally-regulated commercial and industrial equipment](#).

(c) **Central Air Conditioners.**

- (1) **Energy Efficiency Standards for Water-Source Heat Pumps and Ground Water-Source Heat Pumps.** The EER and COP for water-source heat pumps, ground water-source heat pumps, and ground source heat pumps shall be not less than the applicable values shown in Tables C-7 and C-8.

**Table C-7**  
**Standards for Water-Source and Ground Water-Source Heat Pumps**  
**Manufactured On or After January 1, 1993, but Before October 29, 2003**

<i>Appliance</i>	<i>Cooling Capacity (Btu/hr)</i>	<i>Standard Rating</i>		<i>Low Temperature Rating</i>	
		<i>Rating Condition</i>	<i>Minimum Standard</i>	<i>Rating Condition</i>	<i>Minimum Standard</i>
Water source heat pumps (cooling)	< 65,000	85° F entering water temperature	10.0 EER	75° F entering water temperature	10.2 EER
Water-source heat pumps (cooling)	$\geq 65,000$ < 135,000	85° F entering water temperature	10.5 EER	—	—
Ground water-source heat pumps (cooling)	< 135,000	70° F entering water temperature	11.0 EER	50° F entering water temperature	11.5 EER
Ground water-source heat pumps (heating)	All	70° F entering water temperature <sup>1,2</sup>	3.5 COP	50° F entering water temperature <sup>1,2</sup>	3.0 COP
<sup>1</sup> Air entering indoor section 70° db/60° wb (maximum).					
<sup>2</sup> Water flow rate per manufacturer's specifications.					

**Table C-8**  
**Standards for Ground Water-Source and Ground-Source Heat Pumps**  
**Manufactured On or After October 29, 2003**

<i>Appliance</i>	<i>Rating Condition</i>	<i>Minimum Standard</i>
Ground water-source heat pumps (cooling)	59° F entering water temperature	16.2 EER
Ground water-source heat pumps (heating)	50° F entering water temperature	3.6 COP
Ground-source heat pumps (cooling)	77° F entering brine temperature	13.4 EER
Ground-source heat pumps (heating)	32° F entering brine temperature	3.1 COP

~~(2)Energy Efficiency Standards for Air-Cooled Air Conditioners and Air-Source Heat Pumps.~~  
~~See Sections 1605.1(c) and 1605.2(c) for energy efficiency standards for air-cooled air conditioners and air-source heat pumps.~~

~~(3)~~(2) **Energy Efficiency Standards for Computer Room Air Conditioners.** The EER of air-cooled, water-cooled, glycol-cooled, and evaporatively-cooled computer room air conditioners manufactured on or after the effective dates shown, shall be not less than the applicable values shown in Tables C-9 and C-10.

**Table C-9**  
**Standards for Air-Cooled Computer Room Air Conditioners**

<i>Appliance</i>	<i>Cooling Capacity (Btu/hr)</i>	<i>Minimum EER (Btu/watt-hour)</i>			
		<i>Effective January 1, 1998</i>	<i><del>Effective 12 Months After Adoption by the Commission</del> <u>March 1, 2003</u></i>	<i>Effective January 1, 2004</i>	<i>Effective January 1, 2006</i>
Air-cooled computer room air conditioners	< 65,000	8.3	9.3	10.7	11.0
	≥ 65,000 and <135,000	7.7	8.3	10.4	10.4
	≥ 135,000 and < 240,000	—	7.9	10.2	10.2

**Table C-10**  
**Standards for Water-Cooled, Glycol-Cooled, and Evaporatively-Cooled**  
**Computer Room Air Conditioners**

<i>Appliance</i>	<i>Cooling Capacity (Btu/hr)</i>	<i>Minimum EER (Btu/watt-hour)</i>			
		<i>Effective January 1, 1998</i>	<i>Effective <del>12 Months After Adoption by the Commission</del> <u>March 1, 2003</u></i>	<i>Effective October 29, 2004</i>	<i>Effective October 29, 2006</i>
Water-cooled, glycol-cooled, and evaporatively-cooled computer room air conditioners	< 65,000	8.1	8.3	11.7	11.1
	≥ 65,000 and <135,000	8.4	9.5	10.5	10.5
	≥ 135,000 and < 240,000	—	8.6	8.6	10.0

~~(4)~~**(3) Gas-fired Air Conditioners and Heat Pumps.** There is no energy efficiency standard or energy design standard for gas-fired air conditioners or gas-fired heat pumps.

~~(5)~~**(4) Other Central Air Conditioners.** See Sections 1605.1(c) and 1605.2(c) for energy efficiency standards for ~~other~~ central air conditioners that are federally-regulated consumer products or federally-regulated commercial and industrial equipment.

(d) **Spot Air Conditioners.**

There is no energy efficiency standard or energy design standard for spot air conditioners.

(e) **Gas and Oil Space Heaters.**

(1) **Boilers, Central Furnaces, Duct Furnaces, and Unit Heaters.** The efficiency of boilers, central furnaces, duct furnaces, and unit heaters shall be not less than, and the standby loss shall be not greater than, the applicable values shown in Tables E-5, E-6, and E-7.



**Table E-5  
Standards for Boilers**

<i>Appliance</i>	<i>Output (Btu/hr)</i>	<i>Standards</i>		
		<i>Minimum AFUE %</i>	<i>Minimum Combustion Efficiency % *</i>	<i>Maximum Standby Loss (watts)</i>
Gas steam boilers with 3-phase electrical supply	< 300,000	75	—	—
All other boilers with 3-phase electrical supply	< 300,000	80	—	—
Natural gas, non-packaged boilers	≥ 300,000	—	80	147
LPG Non-packaged boilers	≥ 300,000	—	80	352
Oil, non-packaged boilers	≥ 300,000	—	83	—
*At both maximum and minimum rated capacity, as provided and allowed by the controls.				

**Table E-6  
Standards for Furnaces**

<i>Appliance</i>	<i>Application</i>	<i>Minimum Efficiency %</i>
Central furnaces with 3-phase electrical supply < 225,000 Btu/hour	Mobile Home	75 AFUE
	All others	78 AFUE or 80 Thermal Efficiency (at manufacturer's option)

**Table E-7**  
**Standards for Duct Furnaces and Unit Heaters**

<i>Appliance</i>	<i>Fuel</i>	<i>Standards</i>		
		<i>Minimum Thermal Efficiency %<sup>1</sup></i>		<i>Maximum Energy Consumption during standby (watts)</i>
		<i>At maximum rated capacity</i>	<i>At minimum rated capacity</i>	
Duct furnaces	Natural gas	80	75	10
Duct furnaces	LPG <sup>2</sup>	80	75	147
Unit heaters	Natural gas	80	74	10
Unit heaters	LPG <sup>2</sup>	80	74	147
Unit heaters	Oil	81	81	N/A
<sup>1</sup> As provided and allowed by the controls.				
<sup>2</sup> Designed expressly for use with LPG.				

- (2) **Oil Wall Furnaces, Oil Floor Furnaces and Infrared Gas Space Heaters.** There are no energy efficiency standards or energy design standards for oil wall furnaces, oil floor furnaces, or infrared gas space heaters.

~~(3) See Section 1605.1(e) for standards for gas and oil space heaters that are federally-regulated.~~

~~(4)~~(3) **Combination Space-Heating and Water-Heating Appliances.**

- (A) If part of a combination space-heating and water-heating appliance is a water heater, that part shall comply with the applicable water heater standards in Sections 1605.1(f), 1605.2(f), and 1605.3(f).
- (B) If part of a combination space-heating and water-heating appliance is a furnace, boiler, or other space heater, that part shall comply with the applicable furnace, boiler, or other space heater standards in Sections 1605.1(e), 1605.2(e), and 1605.3(e).
- (C) Water heaters that are federally-regulated appliances, and that are contained in combination space heating and water heating appliances that are federally-regulated appliances, are required only to meet the standard for the applicable type of water heater, and are not required to meet any standard for space heaters.
- (4) **Other Gas and Oil Space Heaters.** See Section 1605.1(e) for standards for gas and oil space heaters that are federally-regulated.

### 1605.3

#### (f) Water Heaters.

- (1) **Hot Water Dispensers and Mini-Tank Electric Water Heaters.** The standby loss of hot water dispensers and mini-tank electric water heaters manufactured ~~12 months after adoption by the Commission~~ on or after March 1, 2003 shall be not ~~be~~ greater than 35 watts.
- (2) **Small Water Heaters that are Not Federally-Regulated Consumer Products.** The energy factor of small water heaters manufactured ~~12 months after adoption by the Commission~~ on or after March 1, 2003 that are not federally-regulated consumer products, other than hot water dispensers, booster water heaters, and mini-tank electric water heaters, shall be not less than the applicable values shown in Table F-6.

**Table F-6**  
**Standards for Small Water Heaters that are Not Federally-Regulated Consumer Products**

<i>Appliance</i>	<i>Energy Source</i>	<i>Input Rating</i>	<i>Volume (gallons)</i>	<i>Minimum Energy Factor<sup>1</sup></i>
Storage water heaters	Gas	≤ 75,000 Btu/hr	< 20	0.62 – (.0019 x V)
Storage water heaters	Gas	≤ 75,000 Btu/hr	> 100	0.62 – (.0019 x V)
Storage water heaters	Oil	≤ 105,000 Btu/hr	> 50	0.59 – (.0019 x V)
<del>Storage water heaters</del>	<del>Electricity</del>	<del>≤ 12 kW</del>	<del>&lt; 20</del>	<del>0.93 – (.00132 x V)</del>
Storage water heaters	Electricity	≤ 12 kW	> 120	0.93 – (.00132 x V)
Instantaneous Water Heaters	Gas	≤ 50,000 Btu/hr	Any	0.62 – (.0019 x V)
Instantaneous Water Heaters	Gas	≤ 200,000 Btu/hr	≥ 2	0.62 – (.0019 x V)
Instantaneous Water Heaters	Oil	≤ 210,000 Btu/hr	Any	0.59 – (.0019 x V)
Instantaneous Water Heaters	Electricity	≤ 12 kW	Any	0.93 – (.00132 x V)
<sup>1</sup> Volume (V) = rated storage volume in gallons.				

- (3) **Energy Efficiency Standards for Combination Space-Heating and Water-Heating Appliances.** See Section 1605.3(e)(4) for standards for combination space-heating and water-heating appliances.

~~(3)~~(4) **Energy Efficiency Standards for ~~Small~~ Water Heaters.** See Sections 1605.1(f) ~~and 1605.2(f)~~ for standards for ~~other small~~ water heaters that are federally-regulated consumer products or federally-regulated commercial and industrial equipment.

~~(4)~~**Energy Efficiency Standards for Combination Space Heating and Water Heating Appliances.** See Section 1605.3(e)(4) for standards for combination space heating and water heating appliances.

(g) **Pool Heaters.**

- (1) **Energy Design Standard for Natural Gas Pool Heaters.** Natural gas pool heaters shall not be equipped with constant burning pilots.
- (2) **Energy Design Standard for All Pool Heaters.** All pool heaters shall have a readily accessible on-off switch that is mounted on the outside of the heater and that allows shutting off the heater without adjusting the thermostat setting.

~~(3)~~**Energy Efficiency Standards for Gas and Oil Pool Heaters.** See Section 1605.1(g) for energy efficiency standards for gas and oil pool heaters that are federally-regulated.

~~(4)~~(3) **Energy Efficiency Standards for Heat Pump Pool Heaters.** For heat pump pool heaters manufactured ~~12 months after adoption by the Commission~~ on or after March 1, 2003, the average of the coefficient of performance (COP) at Standard Temperature Rating and the coefficient of performance (COP) at Low Temperature Rating shall be not less than 3.5.

- (4) **Energy Efficiency Standards for Gas and Oil Pool Heaters.** See Section 1605.1(g) for energy efficiency standards for gas and oil pool heaters that are federally-regulated consumer products.

(h) **Plumbing Fittings.**

- (1) **Tub Spout Diverters.** The leakage rate of tub spout diverters shall be not greater than the applicable values shown in Table H-2.

**Table H-2**  
**Standards for Tub Spout Diverters**

<i>Appliance</i>	<i>Testing Conditions</i>	<i>Maximum Leakage Rate</i>	
		<i>Effective March 20, 1992</i>	<i>Effective <del>12 Months After Adoption by the Commission</del> <u>March 1, 2003</u></i>
Tub spout diverters	When new	0.1 gpm	0.01 gpm

	After 15,000 cycles of diverting	0.3 gpm	0.05 gpm
--	----------------------------------	---------	----------

(2) **Showerhead-Tub Spout Diverter Combinations.** Showerhead-tub spout diverter combinations shall meet both the standard for showerheads and the standard for tub spout diverters.

(2)(3) **Other Plumbing Fittings.** See Section 1605.1(h) for energy efficiency standards for ~~other~~ plumbing fittings that are federally-regulated consumer products.

(i) **Plumbing Fixtures.**

See Section 1605.1(i) for energy efficiency standards for plumbing fixtures that are federally-regulated consumer products.

(j) **Fluorescent Lamp Ballasts.**

See Section 1605.1(j) for energy efficiency standards for fluorescent lamp ballasts that are federally-regulated consumer products.

(k) **Lamps.**

See Section 1605.1(k) for energy efficiency standards for ~~general service fluorescent lamps and general service incandescent reflector lamps,~~ lamps that are federally-regulated consumer products.

(l) **Emergency Lighting.**

**Energy Standards for Illuminated Exit Signs.** The input power, luminance contrast, minimum luminance, average luminance and ~~ratio of maximum luminance to minimum luminance~~ maximum to minimum luminance ratio of illuminated exit signs manufactured ~~12 months after the adoption by the Commission,~~ on or after March 1, 2003 shall meet the requirements of Table L.

**Table L**  
**Standards for Exit Signs**

<i>Standard</i>	<i>Requirement</i>
Input power	< 5 watts per face
Luminance contrast	> 0.8
Minimum luminance	>8.6 candelas/meter <sup>2</sup> measured at normal (0°) and 45° viewing angles
Average luminance	> 15 candelas/meter <sup>2</sup> measured at normal (0°) and 45° viewing angles
<del>Luminance uniformity</del> <u>Maximum to minimum luminance ratio</u>	< 20:1 measured at normal (0°) and 45° viewing angles



### 1605.3

#### (m) Traffic Signal Modules and Traffic Signal Lamps.

- (1) **Energy Efficiency Standards for Traffic Signal Modules.** The power consumption of traffic signal modules manufactured ~~12 months after adoption by the Commission~~ on or after March 1, 2003, shall be not greater than the applicable values shown in Table M when tested at the temperatures shown.

**Table M**  
**Standards for Traffic Signal Modules**

<i>Type</i>	<i>Red</i>		<i>Amber</i>		<i>Green</i>	
	<i>at 25° C (77° F)</i>	<i>at 74° C (165.2° F)</i>	<i>at 25° C (77° F)</i>	<i>at 74° C (165.2° F)</i>	<i>at 25° C (77° F)</i>	<i>at 74° C (165.2° F)</i>
300 mm circular	11 watts	17 watts	22 watts	25 watts	15 watts	15 watts
200 mm circular	8 watts	13 watts	13 watts	16 watts	12 watts	12 watts
300 mm arrow	9 watts	12 watts	10 watts	12 watts	11 watts	11 watts
Lane Control (X)	9 watts	12 watts	No requirement	No requirement	No requirement	No requirement
Lane Control (Arrow)	No requirement	No requirement	No requirement	No requirement	11 watts	11 watts

- (2) **Energy Efficiency Standards for Traffic Signal Lamps.** The power consumption of traffic signal lamps manufactured ~~12 months after adoption by the Commission~~ on or after March 1, 2003, shall be not greater than 25 watts.

#### (n) Luminaires.

**Energy Efficiency Standard and Energy Design Standard for Torchieres.** Torchieres manufactured ~~12 months after adoption by the Commission~~ on or after March 1, 2003, shall not consume more than 190 watts and shall not be capable of operating with lamps that total more than 190 watts.

#### (o) Dishwashers.

See Section 1605.1(o) for energy efficiency standards for dishwashers that are federally-regulated consumer products.

#### (p) Commercial Clothes Washers.

- (1) **Energy Efficiency Standards for Commercial Front-Loading and Commercial Top-Loading Automatic Clothes Washers.** The modified energy factor and water factor of commercial front-loading and commercial top-loading automatic clothes washers manufactured on or after the dates indicated in Table P-3 that are not consumer products shall be not less than (modified energy factor) and not more than (water factor) the applicable values shown in Table P-3.

**Table P-3**  
**Standards for Commercial Clothes Washers**

<i>Appliance</i>	<i>Clothes Container Compartment Capacity (ft<sup>3</sup>)</i>	<i>Minimum Modified Energy Factor Effective January 1, 2005</i>	<i>Maximum Water Factor Effective January 1, 2007</i>
Front-loading clothes washers	< 3.5 ft <sup>3</sup>	1.26	9.5
Top-loading clothes washers	< 1.6 ft <sup>3</sup>	0.65	9.5
	≥ 1.6 ft <sup>3</sup> and < 4.0 ft <sup>3</sup>	1.26	9.5

- (2) **Energy Design Standard for Commercial Top-Loading Semi-Automatic Clothes Washers and Commercial Suds-Saving Clothes Washers.** Commercial top-loading semi-automatic clothes washers and commercial suds-saving clothes washers manufactured on or after January 1, 2005 shall have an unheated rinse water option.
- (3) **Other Clothes Washers.** See Section 1605.1(p) for energy efficiency standards and energy design standards for clothes washers that are federally-regulated [consumer products](#).

(q) **Clothes Dryers.**

See Section 1605.1(q) for energy efficiency standards [and energy design standards](#) for clothes dryers that are federally-regulated [consumer products](#).

(r) **Cooking Products and Food Service Equipment.**

- (1) **Energy Standards for Food Service Equipment.** There is no energy efficiency standard or energy design standard for food service equipment.
- (2) **Cooking Products.** See Section 1605.1(r) for the energy design standard for cooking products that are federally-regulated [consumer products](#).

(s) **Electric Motors.**



**1605.3**

See Section 1605.1(s) for energy efficiency standards for electric motors that are federally-regulated commercial and industrial equipment.

- (t) **Distribution Transformers.** The efficiency of all low voltage dry-type distribution transformers manufactured ~~on or after August 1, 2002~~ on or after March 1, 2003 shall be not less than the applicable values shown in Table T.

**Table T**  
**Standards for Distribution Transformers**

<i>Single Phase</i>		<i>Three Phase</i>	
<i>Rated Power Output kVa</i>	<i>Minimum Efficiency %</i>	<i>Rated Power Output kVa</i>	<i>Minimum Efficiency %</i>
≥ 15 < 25	97.7	≥ 15 < 30	97.0
≥ 25 < 37.5	98.0	≥ 30 < 45	97.5
≥ 37.5 < 50	98.2	≥ 45 < 75	97.7
≥ 50 < 75	98.3	≥ 75 < 112.5	98.0
≥ 75 < 100	98.5	≥ 112.5 < 150	98.2
≥ 100 < 167	98.6	≥ 150 < 225	98.3
≥ 167 < 250	98.7	≥ 225 < 300	98.5
≥ 250 < 333	98.8	≥ 300 < 500	98.6
333	98.9	≥ 500 < 750	98.7
—	—	≥ 750 < 1000	98.8
—	—	1000	98.9

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
Reference: Sections 25402(c) and 25960, Public Resources Code.



**Section 1606. Filing by Manufacturers; Listing of Appliances in Database.****(a) Filing of Statements.**

Each manufacturer shall file with the Executive Director a statement for each appliance that is sold or offered for sale in California, or that is intended to be installed in Title 24 construction. The statement shall contain all of the information described in paragraphs (2) through (4) of this subsection and shall meet all of the requirements of paragraph (1) of this subsection and all other applicable requirements in this ~~article~~[Article](#).

EXCEPTIONS. This subsection is not applicable to:

1. luminaires, and
2. cooking products until, as determined by the Executive Director, there takes effect a federal standard or a federal reporting requirement for annual cooking energy consumption or for a similar measure of energy performance.

**(1) General Rules.**

- (A) **Format and Categories.** Each statement shall be in a format (including but not limited to computer formats) and in categories specified by the Executive Director.
- (B) **When Different Statements are Required.** The Executive Director may establish, modify, and enforce schedules for the submittal of statements where it is reasonably necessary for orderly processing of submittals, for example when manufacturers or third parties often submit many statements simultaneously.
- (C) **Asterisks in Model Numbers.** In filing any statement, the manufacturer may use asterisks as a substitute for letters, numbers, blanks, or other characters in the model number, provided that an asterisk (i) shall be used only for a part of the model number that does not indicate energy consumption, energy efficiency, water consumption, or water efficiency, or a design or feature affecting such efficiency or consumption; (ii) shall represent a single letter, number, blank, or other character at the asterisk's location in the model number; and (iii) shall not be used for any of the first four letters, numbers, blanks, or other characters in the model number.
- (D) **Different Functions.** Except as provided in Section 1606(a)(1)(G), if the same appliance can be categorized as more than one type of appliance shown in Table U (for example, if the appliance can serve both water heating and pool heating functions), the manufacturer shall submit a statement for each appliance type. Each appliance type for which a statement is submitted must match all the common identifiers shown in Table U.
- (E) **Multiple Statements.** A manufacturer may file statements for more than one appliance in a single submittal to the Executive Director. If a submittal contains statements for more than one appliance, there shall be only one statement for each appliance, except as provided in Sections 1606(a)(1)(D) and 1606(a)(1)(G). The

Executive Director shall allow multiple statements to be submitted on the same sheet of paper or in the same electronic file under conditions she or he determines are reasonably necessary to ensure accuracy and compatibility with the database.

- (F) **Split System Central Air Conditioners.** For split system air conditioners, the statement shall be for the combination of the compressor-containing unit and the non-compressor-containing unit most likely to represent the highest national sales volume, consistent with Section 1604(c)(3).
  - (G) **Combination Space-Heating and Water-Heating Appliances.** Manufacturers of combination space-heating and water-heating appliances shall file two statements for each such appliance: one statement containing the information listed in Table U for combination space-heating and water-heating appliances, and all other information required by this subsection; and another statement containing the information listed in Table U for the category of space heater or water heater that the appliance is according to the determination required by Sections 1605.3(e)(4) and 1605.3(f)(~~5~~3), and containing all other information required by this subsection. Each appliance type for which a statement is submitted must match all the common identifiers shown in Table U.
- (2) **Manufacturer Information**
- (A) The name, address, telephone number, and, if available, fax number, URL (web site) address, and e-mail address of the manufacturer.
  - (B) The name, address, telephone number, and, if available, fax number and e-mail address of the individual to contact concerning the statement and (if a different individual) of the individual signing the declaration pursuant to Section 1606(a)(4). There shall be only one individual to contact for each category (box) in the "Appliance" column of Table U, except that the individual may, during his or her absence, delegate his or her duties in this regard.
- (3) **Testing and Performance Information.**
- (A) A statement that the appliance has been tested in accordance with all applicable requirements of Sections 1603 and 1604. If Section 1604 provides more than one test method that may be used, the manufacturer shall identify which method was used.
  - (B) The name, address, and telephone number, and, if available, fax number, URL (web site) address, and e-mail address of the laboratory or other institution where the testing required by Sections 1603 and 1604 was performed.
  - (C) For commercial refrigerators, commercial refrigerator-freezers, commercial freezers, large storage water heaters, and plumbing fittings, the test reports upon which the manufacturer relies in filing information pursuant to paragraph (D) immediately below.

- (D) The applicable information listed in Table U. [Where there is text in the "Permissible Answers" column, the information provided must be one of the answers shown.](#)

**(E) How Tested Data Must Be Reported.**

- (i) For any numerical value required by Table U that is produced by a test specified in Section 1604, the reported value shall be no higher for the value for which the consumer would prefer a high number, and no lower for the value for which the consumer would prefer a low number, than the values obtained by testing; unless differing specific rounding-off instructions are specified in the test method specified in Section 1604.
- (ii) For any numerical value required by Table U that is produced by calculation from measured numerical test results, the reported value shall be no higher for the values where the consumer would prefer a high number than the exact result of the calculation, and no lower than the exact result of the calculation where the consumer would prefer a low number, than the values obtained by calculating, unless specific rounding-off instructions are specified in the test method specified in Section 1604.
- (iii) Manufacturers may report:
  - (I) numbers higher than tested values, where the consumer would, all other things being equal, prefer lower values (or is indifferent); and
  - (II) numbers lower than tested values, where the consumer would, all other things being equal, prefer higher values (or is indifferent).

**Example:**

- An air conditioner is tested using the appropriate test method specified in Section 1604 that does not include specific instructions about rounding off or precision of reporting.
- Cooling capacity is measured as: 36,014 Btu per hour.
- The manufacturer may report any value up to 36,014 Btu per hour.
- For cooling capacity, consumers prefer higher values.
- The manufacturer chooses to report 36,000 Btu per hour.
- Electrical energy use is measured at 3,487 watts.
- The manufacturer may report any value down to 3,487 watts.
- For electrical energy use, consumers prefer lower values.
- The manufacturer chooses to report 3,500 watts.
- Using the data the manufacturer chooses to report,  $EER = 36,000/3,500 = 10.285714$ .
- For ~~energy efficiency ratio~~EER, consumers prefer higher values.
- The manufacturer may not report any value of EER over 10.285714.
- The manufacturer chooses to report  $EER = 10.2$  Btu per watt hour.

**Table U**  
**Data Submittal Requirements**

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
	All Appliances	* Manufacturer's Name	
		* Brand Name	
		* Model Number	
		Regulatory Status	Federally-regulated consumer product, federally-regulated commercial and industrial equipment, non-federally-regulated
A	Non-Commercial Refrigerators, Non-Commercial Refrigerator-Freezers, Non-Commercial Freezers	*Style	Kitchen unit, drawer unit, internal freezer, freezer > 30ft <sup>3</sup> and ≤ 39 ft <sup>3</sup> , wine chiller that is a consumer product, category in Table A-3 (specify).
		*Defrost System (except Wine Chillers)	Automatic, manual, partial-automatic
		*Type	Refrigerator, refrigerator-freezer, freezer
		Refrigerator Volume	
		Freezer Volume	
		Total Volume	
		Height, Width, and Depth	
		Annual Energy Consumption (Low, High, and Mean)	
		Anti-sweat Heater Switch	Yes, no
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
		Insulation Type	Ozone-depleting, non-ozone-depleting
	Commercial Refrigerators, Commercial Refrigerator-Freezers, Commercial Freezers	*Style	Ice cream cabinet; milk or beverage cabinet; milk, beverage, or ice cream cabinet; undercounter cabinet; other reach-in cabinet; pass-through cabinet; roll-in or roll-through cabinet; preparation table; buffet table; work top table; wine chiller that is not a consumer product.
		*Defrost System	Automatic, manual, partial-automatic
		*Type	Refrigerator, refrigerator-freezer, freezer
		*Door Style (if applicable)	Solid hinged, solid sliding, transparent hinged, transparent sliding, none.
		Refrigerator Volume	
		Freezer Volume	
		Total Volume	
		Height, Width, and Depth	
		Daily Energy Consumption	
		Type of Illumination (reach-in cabinets, pass-through cabinets, roll-in or roll-through cabinets, with transparent doors, and wine chillers that are not consumer products only)	T-8 fluorescent lamps with electronic ballasts, slim line T-12 fluorescent lamps with electronic ballasts, slim line T-12 fluorescent lamps with magnetic ballasts, other (specify LPW).
		<a href="#">Illumination Wattage</a>	
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
		Insulation Type	Ozone-depleting, non-ozone-depleting
	Refrigerating Bottled or Canned Beverage Vending Machines	Daily Energy Consumption	
		Type of Illumination	T-8 fluorescent lamps with electronic ballasts, other (specify design and LPW).
		Standard Vendible Product	Can (specify size in ounces), Bottle (specify size in ounces)
		Standard Vendible Capacity	
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
		Insulation Type	Ozone-depleting, non-ozone-depleting

\* "Identifier" information as described in Section 1606(e).

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
B	Room Air Conditioners and Room Air-Conditioning Heat Pumps	*Voltage	
		*Electrical Phase	1, 3
		*Type	Room air conditioner, room air conditioning heat pump, casement-only room air conditioner, casement-slider room air conditioner.
		* Louvered Sides	Yes, no
		Cooling Capacity at 95° F	
		Electrical Input at 95° F	
		Energy Efficiency Ratio (EER) at 95° F	
		Heat Capability	Heat pump, electric resistance heating, heat pump and electric resistance heating, no heating capability
		Heating Capacity (for heat pumps)	
		Electrical Input (for heat pumps)	
		Coefficient of Performance (for heat pumps)	
		Heating Capacity (for those with electric resistance heating)	
		Electrical Input (for those with electric resistance heating)	
		Coefficient of Performance (for heat pumps)	
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
	Packaged Terminal Air Conditioners and Packaged Terminal Heat Pumps	*Voltage	
		*Electrical Phase	1, 3
		*Type	PTAC, PTHP
		Cooling Capacity at 95° F	
		Electrical Input at 95° F	
		Energy Efficiency Ratio (EER) at 95° F	
		Heating Capability	Heat pump, electric resistance heating, no heating capability
		Heating Capacity (for those with heating capability)	
		Electrical Input (for those with heating capability)	
		Coefficient of Performance (for those with heating capability)	
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
		Indoor Fan Nominal Horsepower	
		Indoor Fan Motor Type	Premium, standard
		Outdoor Fan Nominal Horsepower	
		Outdoor Fan Motor Type	Premium, standard
		Compressor Power	

\* “Identifier” information as described in Section 1606(e).



	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
C	All Central Air Conditioners and Central Air-Conditioning Heat Pumps	*Non-Compressor-Containing Unit Model Number (for split systems only)	
		*Type	Air conditioner, heat pump (heating and cooling), heat pump (heating only), heat pump (cooling only)
		*Energy Source for Cooling	Electricity, natural gas
		*Energy Source for Heating	Gas, oil, electric heat pump, electric resistance, none
		*Computer Room Air Conditioner	Yes, no
		*System Design	Single package, split system
		*Year-Round	Yes, no
		*Refrigeration Chassis	Yes, no
		*Source of Heating or Cooling	Air, evaporative, water, ground-water, ground, glycol
		*Ducted	Yes, no
		*Type of Condenser or Condensing Unit	Remote condenser, remote condensing unit, non-remote condensing unit, remote chiller condensing unit, remote outdoor unit, remote drycooler
		*Coil Design	Coil alone, coil with blower, remote outdoor coil
		*Indoor Fan	Yes, no
		*Voltage	
		*Electrical Phase	1, 3
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
		Power Factor (for models with variable speed motors only)	
		Thermostatic Expansion Valve (air-source or air-cooled only)	Yes, Exception 1, Exception 2, Exception 3 [See Section 1605.2(c)(1)(B)]
		Coil Model Number with which Compressor was Tested (split systems only)	
		Compressor Motor Design	Single-speed, dual-speed, multiple-speed, variable-speed
		Compressor Motor Horsepower	
		Compressor Motor Type	Premium, standard
		Outdoor Fan Motor Design	Single-speed, dual-speed, multiple-speed, variable-speed
		Outdoor Fan Motor Nominal Horsepower	
		Outdoor Fan Motor Type	Premium, standard
		Indoor Fan Motor Design	Single-speed, dual-speed, multiple-speed, variable-speed
		Indoor Fan Motor Nominal Horsepower	
		Indoor Fan Motor Type	Premium, standard
		Indoor Fan Motor Power Factor (for variable speed motors only)	
	Air-Cooled, Single Package CAC < 65,000 Btu/hour and  Air-Cooled, Split System CAC < 65,000 Btu/hour	Seasonal Energy Efficiency Ratio (SEER)	
		Cooling Capacity at 82° F	
		Electrical Input at 82° F	
		Degradation Coefficient at 82° F	
		Cooling Capacity at 95° F	
		Electrical Input at 95° F	
		Energy Efficiency Ratio (EER) at 95° F	
		Cooling Capacity at 105° F ( <a href="#">Voluntary</a> )	
		Electrical Input at 105° F ( <a href="#">Voluntary</a> )	
		Energy Efficiency Ratio (EER) at 105° F ( <a href="#">Voluntary</a> )	
		Cooling Capacity at 115° F ( <a href="#">Voluntary</a> )	
		Electrical Input at 115° F ( <a href="#">Voluntary</a> )	
		Energy Efficiency Ratio (EER) at 115° F ( <a href="#">Voluntary</a> )	
		Space Constrained Product	Yes, no

\* “Identifier” information as described in Section 1606(e).

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
C	Air-Source, Single Package HP <65,000 Btu/hour and  Air-Source Split System HP <65,000 Btu/hour	Seasonal Energy Efficiency Ratio (SEER)	
		Cooling Capacity at 82° F	
		Electrical Input at 82° F	
		Degradation Coefficient at 82° F	
		Cooling Capacity at 95° F	
		Electrical Input at 95° F	
		Energy Efficiency Ratio (EER) at 95° F	
		Cooling Capacity at 115° F (Voluntary)	
		Electrical Input at 115° F (Voluntary)	
		Energy Efficiency Ratio (EER) at 115° F (Voluntary)	
		Heating Seasonal Performance Factor (HSPF)	
		Heating Capacity	
		Electrical Input	
		Space Constrained Product?	Yes, no
	Air-Cooled, Single Package CAC ≥ 65,000 and < 240,000 Btu/hour and;  Air-Cooled, Split System CAC ≥ 65,000 and < 40,000 Btu/hour; and;  All Computer Room Air Conditioners	Cooling Capacity at 95° F	
		Electrical Input at 95° F	
		Energy Efficiency Ratio (EER) at 95° F	
		Integrated Part Load Value (IPLV) if applicable	
		Heating System Type	Gas, oil, electric resistance, none
	Air-Source, Single Package HP ≥ 65,000 Btu/hour and < 240,000 Btu/hour; and  Air-Source, Split-System HP ≥ 65,000 and < 240,000 Btu/hour	Cooling Capacity at 95° F	
		Electrical Input at 95° F	
		Energy Efficiency Ratio (EER) at 95° F	
		Integrated Part Load Value (IPLV) if applicable	
		Heating Capacity at 47° F	
		Electrical Input at 47° F	
		Coefficient of Performance (COP) at 47° F	
		Heating Capacity at 17° F	
		Electrical Input at 17° F	
		Coefficient of Performance (COP) at 17° F	
	Evaporatively-Cooled Single Package CAC < 240,000 Btu/hour and  Evaporatively-Cooled Split System CAC < 240,000 Btu/hour	Cooling Capacity at 95° F	
		Electrical Input at 95° F	
		Energy Efficiency Ratio (EER) at 95° F	
		Integrated Part Load Value (IPLV) if applicable	
		Heating System Type	Gas, oil, electric resistance, none
	Water-Cooled Single-Package CAC < 240,000 Btu/hour and  Water-Cooled, Split System CAC < 240,000 Btu/hour	Compressor Electrical Input (for models ≥ 65,000 only)	
		Indoor Fan Electrical Input (for models ≥ 65,000 only)	
		Outdoor Fan Electrical Input (for models ≥ 65,000 only)	
		Cooling Capacity at 85° F Entering Water Temperature	
		Electrical Input at 85° F Entering Water Temperature	
		Energy Efficiency Ratio (EER) at 85° F Entering Water Temperature	
		Low Temperature EER at 75° F Entering Water Temperature (for models < 65,000 Btu/hour only)	
		Heating System Type	Gas, oil electric resistance, none

\* “Identifier” information as described in Section 1606(e).

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
C	Water-Source, Single Package HP < 240,000 Btu/hour and  Water-Source Split System HP < 240,000 Btu/hour	Compressor Electrical Input (for models $\geq 65,000$ only)	
		Indoor Fan Electrical Input (for models $\geq 65,000$ only)	
		Outdoor Fan Electrical Input (for models $\geq 65,000$ only)	
		Cooling Capacity at 85° F Entering Water Temperature	
		Electrical Input at 85° F Entering Water Temperature	
		Energy Efficiency Ratio (EER) at 85° F Entering Water Temperature	
		Heating Capacity at 70° F Entering Water Temperature	
		Electrical Input at 70° F Entering Water Temperature	
		Coefficient of Performance (COP) at 70° F Entering Water Temperature	
		Low Temperature EER at 75° F for Entering Water Temperature (models < 65,000 Btu/hour)	
	Ground Water-Source, Single Package HP < 240,000 Btu/hour and  Ground Water-Source Split System HP < 240,000 Btu/hour	Compressor Electrical Input (for models $\geq 65,000$ only)	
		Indoor Fan Electrical Input (for models $\geq 65,000$ only)	
		Outdoor Fan Electrical Input (for models $\geq 65,000$ only)	
		Cooling Capacity at 70° F Entering Water Temperature	
		Electrical Input at 70° F Entering Water Temperature	
		Energy Efficiency Ratio (EER) at 70° F Entering Water Temperature	
		Cooling Capacity at 59° F Entering Water Temperature (for models manufactured on or after October 29, 2003 only)	
		Electrical Input at 59° F Entering Water Temperature (for models manufactured on or after October 29, 2003 only)	
		Energy Efficiency Ratio (EER) at 59° F Entering Water Temperature (for models manufactured on or after October 29, 2003 only)	
		Heating Capacity at 70° F Entering Water Temperature	
		Electrical Input at 70° F Entering Water Temperature	
		Coefficient of Performance (COP) at 70° F Entering Water Temperature	
		Heating Capacity at 50° F Entering Water Temperature	
		Electrical Input at 50° F Entering Water Temperature	
		Coefficient of Performance (COP) at 50° F Entering Water Temperature	
		Low Temperature EER at 50° F Entering Water Temperature	
	Ground Source, Closed-Loop, Single Package HP and  Ground-Source, Closed-Loop, Split System HP	Compressor Electrical Input (for models $\geq 65,000$ only)	
		Indoor Fan Electrical Input (for models $\geq 65,000$ only)	
		Outdoor Fan Electrical Input (for models $\geq 65,000$ only)	
		Cooling Capacity at 77° F Entering Brine Temperature	
		Electrical Input at 77° F Entering Brine Temperature	
		Energy Efficiency Ratio (EER) at 77° F Entering Brine Temperature	
		Heating Capacity at 32° F Entering Brine Temperature	
		Electrical Input at 32° F Entering Brine Temperature	
		Coefficient of Performance (COP) at 32° F Entering Brine Temperature	
	Gas-Fired Air Conditioners and Gas-Fired Heat Pumps	Cooling Capacity – (cooling bin summary)	
		Gas Input While Cooling – (cooling bin summary)	
		Electric Input While Cooling – (cooling bin summary)	
		Cooling COP – Gas	
		Cooling COP – Electric	
		Heating Output – (heating bin summary)	
		Gas Input While Heating – (cooling bin summary)	
		Electric Input While Heating – (cooling bin summary)	
		Heating COP – Gas	
		Heating COP – Electric	

\* “Identifier” information as described in Section 1606(e).

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
D	Spot Air Conditioners	*Type	
		Cooling Capacity	
		Total Electrical Input	
		Cooling Efficiency Ratio (CER)	
		Fan Electrical Input	
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
E	All Space Heaters	*Energy Source	Natural gas, LPG, oil, <del>electric-resistance</del>
		*Burner type	Atmospheric, power (natural draft), power (forced draft, power (induced draft), power (pulse combustion)
		*Ignition (for gas/oil)	Continuous pilot, intermittent or interrupted operating ignition
		Draft Equipment	Draft hood, draft diverter, barometric regulator, none
		Off-cycle Devices	Stack damper, electro-mechanical inlet damper, electro-mechanical flue damper, none
		*Labeled for Outdoor Installation?	Yes, no
		Flue Gas	Condensing, non-condensing
		Control	Single-stage, two-stage modulating, step modulating
		*Electrical Phase	1, 3
		*Air Flow Direction	Up, down, horizontal
		Fan Motor Design (furnaces only)	Single-speed, dual-speed, multiple-speed, variable-speed
		Fan Motor Horsepower (furnaces only)	
		Fan Motor Type (furnaces only)	Premium, standard
		Fan Motor Power Factor (furnaces with variable-speed motors only)	
		Pump Motor Design (boilers only)	Single-speed, dual-speed, multiple-speed, variable-speed
		Pump Motor Horsepower (boilers only)	
		Pump Motor Type (boilers only)	Premium, standard
		Pump Motor Power Factor (boilers with variable-speed motors only)	
		Nameplate Input Rating	
		Rated Output	
	Central Furnaces	*Mobile Home	Yes, no
		In-Door Blower Capacity, High, at 0.5 Degrees W.C.	
		In-Door Blower Capacity, Low, at 0.5 Degrees W.C.	
		Thermal Efficiency (for models $\geq 225,000$ Btu/hr input only)	
		Standby Watts [controls, not fan energy] (for models $\geq 225,000$ Btu/hour input only)	
		Annual Fuel Energy Consumption (for models $< 225,000$ Btu/hour input only)	
		Annual Fuel Utilization Efficiency [AFUE] (for models $< 225,000$ Btu/hour input only)	
		Annual Auxiliary Electrical Energy Consumption <del>Providing Heat to Heated Space</del> (for models $< 225,000$ Btu/hour input only)	
		Total Annual Auxiliary Electrical Energy (for models $< 225,000$ Btu/hour input only)	
		Part Load Steady State Efficiency	

\* “Identifier” information as described in Section 1606(e).

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
E	Room Heaters, Floor Furnaces, and Wall Furnaces	*Type	Room heater (vented); floor furnace (fan); floor furnace (gravity); wall furnace (direct vent fan); wall furnace (direct vent gravity); wall furnace (vented fan); wall furnace (vented gravity)
		<del>Electrical Power During Standby</del>	
		Annual Fuel Utilization Efficiency (AFUE)	
		<del>Maximum Electrical Power Providing Heat to the Heated Space (fan type models only)</del>	
		<del>Electrical Power During Standby which Provides Heat to Heated Space (fan type models only)</del>	
		<del>Maximum Electrical Power (fan type models only)</del>	
		<del>Auxiliary Electric Power (vented heaters only)</del>	
		<del>Average Annual Auxiliary Electrical Energy Consumption (vented heaters only)</del>	
	Duct Furnaces and Unit Heaters	*Type	Duct furnace; low static unit heater; high static unit heater; floor-mounted unit heater
		Thermal Efficiency at Maximum Rated Capacity	
		Energy Consumption During Standby	
		Thermal Efficiency at Minimum Rated Capacity	
	Infrared Gas Space Heaters	*Type	Patio heater, non-patio heater
		Intensity	High, low
		Radiant tube type	Yes, no
		Portable	Yes, no
		Vented	Yes, no
		Physically possible to measure radiant coefficient	Yes, no
		Combustion Efficiency (for models using ANSI test method only)	
		Radiant Coefficient (for models using ANSI test method only)	
		Effective Heating Area (for models using FSTC test method only)	
		Efficiency Index (for models using FSTC test method only)	
	Combination Space-Heating and Water-Heating Equipment	*Primary Function	Primary function is space heating, secondary function is domestic water heating; primary function is domestic water heating, secondary function is space heating
		Volume (measured)	
		Volume (rated)	
		Energy factor	
		Annual Fuel Utilization Efficiency (AFUE)	
		Combined Annual Efficiency (CAE)	
	Boilers	*Type	Steam, hot water
		Design	<del>Finned tube</del> copper, cast iron, other
		Input at Minimum Capacity	
		Input at Maximum Capacity	
		Output at Maximum Capacity	
		Output at Minimum Capacity	
		Combustion Efficiency (for models $\geq 300,000$ Btu/hour input only)	
		Thermal Efficiency (for models $\geq 300,000$ Btu/hour input only)	
		Standby Loss (for models $\geq 300,000$ Btu/hour input only)	
		AFUE (for models $< 300,000$ Btu/hour input only)	
		Input at Minimum Capacity Rating (for non-packaged boilers $> 300,000$ Btu/hr input only)	
		Thermal Efficiency at Minimum Capacity Rating	

\* “Identifier” information as described in Section 1606(e).

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
F	All Water Heaters	*Energy Source	Natural gas, LPG, oil, electric resistance, heat pump
		Rated Volume (except booster heater)	
		Measured Volume (except booster heater)	
		Rated Input	
		Heat Traps (for storage models only)	Yes, no
		Ozone Depleting Substance in Insulation	Yes, no
		Ozone Depleting Substance in Refrigerant (for heat pump water heaters only)	Yes, no
		Standing Pilot (natural gas/LPG only)	Yes, no
		Mobile Home	Yes, no
	Booster Heaters	Rated Output	
		Flow Capacity	Gal/min, gal/hr
		Thermal Efficiency at 100% Capacity with 110° F Water Input Temperature	
	Hot Water Dispensers	Rated Output	
		Standby Loss	
	Mini-Tank Electric Water Heater	First Hour Rating (gallons/hour)	
		Size (overall dimensions in inches)	
		Recovery Efficiency (%)	
		Standby Loss (%/hour)	
		Total Standby Loss (watts)	
		Annual Energy Consumption (kBtu)	
	Other Small Electric Water Heaters	Annual Energy Consumption	
		Tabletop Water Heater	Yes, no
		First Hour Rating (gallons/hour)	
		Energy Factor	
	Large Electric Water Heaters	<del>Tabletop Water Heater</del>	<del>Yes, no</del>
		<del>Thermal Efficiency % (for non-heat pump types)</del>	
		Standby Loss, % (large storage models only)	
		Standby Loss, Watts (large storage models only)	
		R-value of Insulation (for units over 140 gallons)	
	Small Gas Water Heaters and Small Oil Water Heaters	First Hour Rating (For storage models only)	
		Maximum Gallons per Minute (For instantaneous models only)	
		Recovery Efficiency	
		Annual Energy Consumption	
		Energy Factor	
		Pilot Light Energy Consumption (Instantaneous models only)	
	Large Gas Water Heaters and Large Oil Water Heaters	Thermal Efficiency (%)	
		Standby Loss (%/hr)	
		Standby Loss (Btu/hr)	
		<del>Auxiliary</del> Electrical Power During Recovery in Watts (While appliance is heating, for storage models only)	
		<del>Auxiliary</del> Electrical Power During Standby in Watts	
		R-value of Insulation (for units over 140 gallons)	
		Flue Damper (for units over 140 gallons)	Yes, no
		Fan Assisted Combustion (for units over 140 gallons)	Yes, no

\* “Identifier” information as described in Section 1606(e).

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
F	Heat Pump Water Heaters	Current Rating	
		Voltage	
		Energy Factor (for models not greater than 24 amps current rating)	
		Standby Loss (for models over 24 amps current rating)	
		Thermal Efficiency (for models over 24 amps current rating and $\geq 4,000$ Btu/hour per gallon)	
		R-value of Insulation (for models over 24 amps current rating)	
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
G	Heat Pump Pool Heaters	Heating Capacity at Standard Temperature Rating	
		Coefficient of Performance at Standard Temperature Rating	
		Heating Capacity at Low Temperature Rating	
		Coefficient of Performance at Low Temperature Rating	
		Heating Capacity at Spa Conditions Rating	
		Coefficient of Performance at Spa Conditions Rating	
		Refrigerant Type	Ozone-depleting, non-ozone-depleting
	Other Pool Heaters	Type	Natural gas, LPG, oil, electric resistance
		IID Gas Only	Yes, no; gas only
		Input	
		Thermal Efficiency	
H	Plumbing Fittings	*Type	Showerhead, lavatory faucet, lift-type tub spout diverter, turn-type tub spout diverter, pull-type tub spout diverter, push-type tub spout diverter
		Flow Rate	
		Pulsating Showerheads Only	Yes, no
		Rim Space (wash fountains only)	
		Tub Spout Leakage Rate When New	
		Tub Spout Leakage Rate After 15,000 Cycles	
I	Plumbing Fixtures	*Type	Blowout water closet, gravity tank type water closet, electromechanical hydraulic water closet, flushometer tank water closet, urinal, prison-type urinal, prison-type water closet, trough-type urinal, waterless urinal, vacuum type urinal, vacuum type water closet
		Water Consumption	
		Trough Length (trough-type urinals only)	
J	Fluorescent Lamp Ballasts	*Ballast Input Voltage	120, 277, other (specify)
		*Number of Lamps	1, 2, 3, 4, other (specify)
		*Type of Lamp	F40T12, F96T12, F96T12HO, other T12 (specify), T5, T8, other (specify)
		Designed for Dimming	Continuous, stepped, no
		Designed for Dimming to 50% or Less of Maximum Output	Continuous, stepped, no
		Power Factor	
		Building Application	Designed but not labeled for use only in residential buildings, designed and labeled for use only in residential buildings, other
		Designed for Use in Ambient Temperatures of $\leq 0^{\circ}$ F	Yes, no
		Designed for Use (a) at Ambient Temperatures $\leq -20^{\circ}$ F and (b) in an Outdoor Sign (for models with two F96T12HO lamps only)	Yes, no
		Designated as a Replacement Ballast as Defined in Section 1602(j)	Yes, no
		Total Nominal Lamp Watts	
		Ballast Efficacy Factor	
		Relative Light Output	
		Circuit Design	Cathode cut-out, electronic, magnetic
		Start	Instant, rapid

\* “Identifier” information as described in Section 1606(e).

	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
K	Lamps	*Type	4-foot medium bi-pin general service fluorescent lamp, 2-foot U-shaped general service fluorescent lamp, 8-foot slim line general service fluorescent lamp, 8-foot high output general service fluorescent lamp, incandescent reflector lamp, other (specify)
		Lumens	
		Nominal Lamp Wattage	
		Color Rendition Index (for general service fluorescent lamp models only)	
		Average Lamp Efficacy	
L	Emergency Lighting	Light Source Type	LED, electroluminescent, fluorescent, incandescent, other (specify)
		Height and Width of Letters "E, X, T" (cm)	
		Height and Width of Letter "I" (cm)	
		Battery Backup	Yes, no
		Number of Faces	
		Sign Format	Edge-lit, panel, matrix, stencil, other (specify)
		Input Power (watts)	
		Minimum Luminance of face (candelas per square meter of face)	
		Maximum Luminance (candelas per square meter of face)	
		Average Luminance of face (candelas per square meter of face)	
		<u>Luminance Uniformity</u> <u>Maximum to Minimum Luminance Ratio</u>	A ratio X:Y
M	Traffic Signal Modules	Luminance Contrast	0.00 – 1.00
		Module Color (Green, Amber, Red)	
		Module Size and Type (300 mm Circular, 200 mm Circular, 300 mm Arrow, Lane Control)	
		Power Consumption (at 25° C)	
N	Luminaires	Power Consumption (at 74° C)	
		None	
O	Dishwashers	*Type	Compact, standard
		Power Consumption Per Cycle	
		*Width	
		Water Heating Dishwasher	
		Truncated Normal Cycle Capable	
P	Clothes Washers	Energy Factor	
		*Type	Front-loading, top loading
		*Controls	Automatic, semi-automatic, other (specify)
		*Axis	Horizontal, vertical
		Suds-saving	Yes, no
		Combination Washer/Dryer	Yes, no
		Clothes Container Compartment Capacity	
		Power Consumption Per Cycle	
		Water Consumption Per Cycle (for commercial models only)	
		Energy Factor	
		Water Factor (for commercial models only)	
Q	Clothes Dryers	<u>≠ Remaining Moisture Content (required only on and after January 1, 2004)</u>	
		*Fuel	Gas, electric
		*Drum Capacity	
		*Voltage	120, 240, other (specify)
		Combination Washer/Dryer	Yes, no
		Automatic Termination Control	Yes, no
		Energy Factor	
		Pilot Light (for gas models only)	Yes, no

\* "Identifier" information as described in Section 1606(e).

≠ RMC must be reported effective January 1, 2004.



	<i>Appliance</i>	<i>Required Information</i>	<i>Permissible Answers</i>
R	Consumer Product Cooking Products [filing requirements only when there is a federal standard or federal reporting requirement for annual cooking energy consumption (or similar measure of energy performance).]	Type	Conventional range, conventional cooking top, conventional oven, microwave oven, microwave/conventional range, other (specify)
		Energy Type	Gas, electric, microwave
		Electrical Supply cord (for gas models only)	Yes, no
		Constant Burning Pilot (for gas models only)	Yes, no
		Annual Cooking Energy Consumption	
		Annual Self-cleaning Energy Consumption (conventional ovens only)	
		Total Annual Energy Consumption (conventional ovens only)	
		Clock Power Consumption (gas conventional ovens only)	
		Pilot Light Consumption (gas conventional ovens only)	
		Annual Secondary Energy Consumption (gas conventional ovens only)	
	Commercial Convection Ovens	Energy Input Rate	
		Idle Energy Consumption Rate	
	Commercial Hot Food Holding Cabinets	Energy Input Rate	
		Idle Energy Consumption Rate	
	Commercial range tops	Energy Input Rate	
		Cooking Energy Efficiency	
S	Electric Motors	Type	NEMA Design A, NEMA Design B, IEC Design N, other (specify)
		Voltage	230V, 460V, both 230V and 460V
		Speed	Single, multiple
		Rated Horsepower	1-200
		Power Consumption	Watts
		Air Exchange	Open, enclosed
		Number of Poles	2, 4, 6, 8
		Nominal Full Load Efficiency	Percent
T	Distribution Transformers	Rated Output Power	
		Output Power at 35% of the Rated Output Power	
		Total Loss Power at 35% of the Rated Output Power	
		Efficiency at 35% of the Rated Output Power	

\* “Identifier” information as described in Section 1606(e).

**(4) Declaration.**

- (A) Each statement shall include a declaration, executed under penalty of perjury of the laws of California, that (1) all the information provided in the statement is true, complete, accurate, and in compliance with all applicable provisions of this Article; (2) if the statement is being filed electronically, that the requirements of Section 1606(g) have been and are being complied with; and (3) for appliances for which there is an energy efficiency, energy consumption, energy design, water efficiency, water consumption, or water design standard in Section 1605.1, 1605.2, or 1605.3, that the appliance complies with the applicable standards.
- (B) If the manufacturer is a corporation, partnership, or other business entity, the declaration shall be signed by an individual authorized to make the declaration and file the statement on behalf of the business entity, and the declaration shall contain an affirmation that the individual signing is so authorized.
- (C) The declaration shall be submitted and maintained as follows:
  - (i) Statements filed on paper.
    - (I) If the statement is filed by a manufacturer, then the manufacturer shall file a wet-signed paper declaration with the Executive Director and the Executive Director shall keep the declaration.
    - (II) If the statement is filed by a third party under Section 1606(f), then the manufacturer shall file a wet-signed paper declaration with the third party and the third party shall keep the declaration and shall provide it to the Executive Director on request.
  - (ii) Statements filed electronically.
    - (I) If the information is filed by a manufacturer, then either:
      - (one) the manufacturer shall file a wet-signed paper declaration with the Executive Director and the Executive Director shall keep the declaration;
      - (two) if the Executive Director has approved the use of a unique digital identifier for this purpose, the manufacturer shall include in the statement a declaration digitally signed under Government Code 16.5 and Title 2, California Code of Regulations, Division 7, Chapter 10 (beginning with Section 22000); or
      - (three) the manufacturer shall execute a wet-signed paper declaration, electronically scan and copy the declaration, include the electronic copy of the declaration with the statement filed with the Executive Director, and keep the wet-signed paper

declaration and provide it upon request to the Commission; and the Commission shall keep the electronic copy of the declaration.

- (II) If the information is filed by a third party under Section 1606(f), then either:
  - (one) the manufacturer shall file a wet-signed paper declaration with the third party and the third party shall keep the declaration and shall provide it to the Executive Director on request;
  - (two) if the Executive Director has approved the use of a unique digital identifier for this purpose, the manufacturer shall execute a declaration digitally signed under Government Code 16.5 and Title 2, California Code of Regulations, Division 7, Chapter 10 (beginning with Section 22000), and provide the electronic declaration to the third party; and the third party shall keep a copy of the electronic declaration and shall provide it to the Executive Director on request; or
  - (three) the manufacturer shall execute a wet-signed paper declaration, electronically scan and copy the declaration, include both the wet-signed paper declaration and the electronic copy of the declaration with the electronic information provided to the third party; the third party shall include the electronic copy with information filed with the Executive Director, shall keep an electronic copy, and shall provide the wet-signed paper declaration to the Executive Director upon request; and the Executive Director shall keep a copy of the electronic declaration.

(b) **Review of Statements by the Executive Director.**

In this subsection, "manufacturer" also includes a third party filing a statement under Section 1606(f).

- (1) **Determination.** The Executive Director shall determine whether a statement is complete, accurate, and in compliance with all applicable provisions of this Article, and whether the appliance for which the statement was submitted complies with all applicable standards in Sections 1605.1, 1605.2, [and](#) 1605.3.

(2) **Informing Manufacturer of Determination.**

- (A) The Executive Director shall inform the manufacturer of the determination within these time limits:

through ~~January~~ ~~February~~ 3128, 2003:

if the statement was filed electronically, within 30 calendar days after receipt by the Executive Director;

if the statement was filed on paper, within 45 calendar days after receipt by the Executive Director; and

beginning ~~February~~ March 1, 2003:

if the statement was filed electronically, within 14 calendar days after receipt by the Executive Director;

if the statement was filed on paper, within 21 calendar days after receipt by the Executive Director.

- (B) The Executive Director's determination shall be sent to the manufacturer electronically if the statement was filed electronically and either electronically or on paper if the statement was filed on paper.

(3) **Nature of Determination.**

- (A) **Statement is Incomplete.** If the Executive Director determines that a statement is not complete, or that the statement does not contain enough information to determine whether it is accurate or whether the appliance complies with an applicable standard, the Executive Director shall return the statement to the manufacturer with an explanation of its defects and a request for any necessary additional information. The manufacturer shall refile the statement with all information requested by the Executive Director and with any other information it wants to file. The Executive Director shall review the refiled statement according to the time limits in Section 1606(b)(2).
- (B) **Statement is Inaccurate or Appliance Does Not Comply.** If the Executive Director determines that the statement is inaccurate or that the appliance does not comply with an applicable standard, the Executive Director shall reject the statement and return it to the manufacturer with an explanation of its defects. The manufacturer may submit another statement for the appliance at any time.
- (C) **Statement is Complete and Accurate and Appliance Complies.** If the Executive Director determines that the statement is complete and accurate and that the appliance complies with all applicable standards, the Executive Director shall immediately include the appliance in the database and shall so inform the manufacturer. (Section 1608(a) states that no appliance within the scope of these regulations may be sold or offered for sale in California, or installed in Title 24 construction, unless the appliance is in the database.)

(c) **Database of Appliance Models.**

- (1) **Creation of Database.** The Executive Director shall maintain a paper or electronic database. The database shall consist of two parts:
  - (A) "Active Database." The active database shall contain, at least, information on all appliances that are currently in production, for which complete and accurate statements have been received pursuant to Section 1606(a), and that have not been removed from

the database pursuant to Sections 1606(d)-(h), or 1608(b)-(e).

- (B) “Historical Database.” The historical database shall contain, at least, information on all appliances that (1) are no longer in production, for which complete and accurate statements have been received pursuant to Section 1606(a) or (2) all appliances that have been removed from the current database pursuant to Sections 1606(d)-(h), Section 1608(b), or 1608(c).

- (2) **Status of Database.** The database is the directory published by the Commission within the meaning of Title 24, California Code of Regulations, Part 6, Subchapter 1, Section 100(g). The database in existence on the effective date of this paragraph is the directory referred to in this paragraph, until that existing database is modified by the Executive Director pursuant to this Article.
- (3) **Annual Confirmation of Database Listings.** At least annually the Executive Director shall, by writing to the most recent address filed pursuant to Section 1606(a)(~~1~~2)(B), request each manufacturer of an appliance listed in the database to confirm the validity, or to correct in compliance with this Article, all of the information in each of its database listings, including but not limited to the appliance’s compliance with any applicable standard adopted since the most recent filing by the manufacturer. If, within 30 days after the mailing, there is any appliance for which the Executive Director has not received a reply from the manufacturer that confirms the validity of, or corrects, all of the information in the database listing, the Executive Director shall write via certified mail, to the same address. If within 30 days of the latter mailing there is no such reply, the appliance shall be removed from the database and moved into the ~~historie~~Historical databaseDatabase, and it may be presumed that the appliance is no longer in production.

- (d) **Assessment of Completeness, Accuracy, and Compliance of Manufacturer Statements.**

Notwithstanding any other provision of these regulations, the Executive Director may at any time challenge the completeness, accuracy, and compliance with the requirements of this Article, of any statement or confirmation filed pursuant to this Section. If the statement is incomplete or inaccurate, or if the Executive Director determines that the statement otherwise fails to comply with any of the requirements of this Article, then he or she shall, ten days after providing written notice by certified mail to the person designated in Section 1606(a)(~~1~~2)(B), remove the appliance from the database described in Section 1606(c).

- (e) **Modified and Discontinued Appliances.**

- (1) If any of the characteristics listed in Table U are changed, the manufacturer shall file a statement containing the identifiers listed in Table U for the appliance and updated information for all of the characteristics that have been changed. Upon receipt of such a statement, the Executive Director shall review the statement under Section 1606(b). If the statement is complete, accurate, in compliance with all applicable standards, the Executive Director shall modify the database accordingly.
- (2) After any appliance has ceased being sold or offered for sale in California, or distributed by the manufacturer with the intention of installing it in Title 24 construction, the manufacturer

shall file a statement so stating and containing the Identifiers listed in Table U for the appliance. Upon receipt of such a statement, the Executive Director shall review the statement under Section 1606(b). If the statement is complete, accurate, and in compliance with all applicable provisions of this Article, the Executive Director shall move the appliance from the Active Database to the Historical Database.

(f) **Filing by Third Parties.**

- (1) A third party may file on behalf of a manufacturer the information required by Sections 1606(a)(~~2~~<sup>1</sup>), 1606(a)(~~2~~<sup>3</sup>), 1606(a)(~~3~~<sup>4</sup>), 1606(c)(3), or 1606(e) if:
  - (A) before or with its first submittal, and at least annually thereafter, the third party submits to the Executive Director, under penalty of perjury, persuasive evidence that:
    - (i) the third party has read and understood all the provisions of this Article, of federal law, and of all other documents applicable to each appliance category in Subsections (a) – (t) of Section 1601 for which the third party will file information; and
    - (ii) the third party is financially and technically capable of complying with the applicable provisions of this Article;
  - (B) the manufacturer submits to the third party:
    - (i) the information that is required;
    - (ii) a declaration under penalty of perjury, and where applicable pursuant to Section 1606(a)(4)(B),
      - (I) that the information is true, complete, accurate, and in compliance with all applicable provisions of this Article, and,
      - (II) for appliances for which there is an energy efficiency or energy design standard in Section 1605.1, 1605.2, or 1605.3, that the model complies with the applicable standards; and
    - (iii) an authorization, filed with both the third party and the Commission, for the third party to submit the information to the Commission on behalf of the manufacturer.
  - (C) the third party submits to the Executive Director, in compliance with the requirements of this Article applicable to manufacturer-filed submittals:
    - (i) the information that is required; and
    - (ii) a declaration under penalty of perjury, and where applicable pursuant to Section 1606(a)(4)(B), that:

- (I) to the best of the third party's knowledge and belief, the information submitted to the Commission is the same as the information submitted by the manufacturer to the third party; the information is true, complete, accurate, and in compliance with all applicable provisions of this Article; and, for appliances for which there is an energy efficiency, energy design,

water consumption, or water efficiency standard in Section 1605.1, 1605.2, or 1605.3, the appliance complies with the applicable standards; and

- (II) the requirements of Sections 1606(f)(1) are met;
  - (D) the third party has an agreement with the manufacturer that allows the third party to challenge the truth, accuracy, and completeness of information submitted by the manufacturer to the third party, and to refuse to submit to the Commission information that the third party believes is not truthful, accurate, or complete; and
  - (E) the third party provides, upon ten days' written notice from the Executive Director, all information provided by the manufacturer and all information relating to any challenges pursuant to Section 1606(f)(1)(D).
- (2) Whether a manufacturer files information required by this Section by itself or via a third party, the manufacturer remains responsible for the truth, accuracy, completeness, and timeliness of all required filings.
  - (3) At any time the Executive Director may forbid a third party from making filings for a specified time, allow reinstatement subject to appropriate conditions, and remove affected appliances from the database, if he or she finds that there is noncompliance with an applicable provision of this Article.
  - (4) The provisions of this Article are applicable to all submittals and filings, whether made by a manufacturer directly or by a third party on behalf of a manufacturer.

**(g) Electronic Filing.**

- (1) Unless otherwise stated in this Article, the statements and other submittals required or allowed by this Article shall be filed electronically by all third parties acting under Section 1606(f) so that:
  - (A) the electronic filing uses a format and characteristics, including without limitation appropriate formatting, that are specified by the Executive Director, and includes a declaration that complies with Section 1606(a)(4);
  - (B) within three days of the electronic filing being made, an exact paper copy of all declarations required by Sections 1606(a)(4) or 1606(f)(1)(C)(ii) is executed by a person authorized under the appropriate section to execute it;
  - (C) for two years from the date of filing the person making the filing keeps the exact paper copies required by paragraph (B) immediately above and provides those copies to the Executive Director upon 10 days' written request.
- (2) Any electronic filing constitutes a representation by the person making the filing that:
  - (A) all applicable requirements of this Article have been met;



- (B) the person will electronically acknowledge receipt of all electronic communications concerning the filing from the Executive Director to the person;
  - (C) all electronic communications concerning the filing from the Executive Director to the person shall be deemed received by the person upon notification to the Executive Director, by the computer from which the Executive Director communication has been sent, that the communication has been sent; and
  - (D) all electronic communications concerning the filing from the person to the Executive Director shall be deemed received by the Executive Director only upon actual receipt.
- (3) At any time the Executive Director may forbid electronic filings by any person, or generically, and may remove affected appliance models from the database, if he or she finds that an applicable requirement of this Article ~~are~~is not being met.

(h) **Trade Association Directories.**

- (1) A paper or electronic directory, or a part thereof, published by an appliance trade association may be used for any purpose that the database established pursuant to Section 1606(c) is used for, if the Executive Director approves the directory, or part thereof, by determining and confirming that:
  - (A) the trade association is an approved industry certification program for each appliance listed in the directory;
  - (B) all of the applicable requirements of Section 1606(f) for third party submittals are met for the directory;
  - (C) the entity submits to the Executive Director:
    - (i) all of the information in the directory, within one working day of the approval of the directory;
    - (ii) all of the information in the directory that has changed since the previous submittal, at the end of each week during which there has been any change;
    - (iii) a declaration, signed under penalty of perjury of the laws of California, that to the best of the trade association's knowledge and belief:
      - (I) the information in the directory is the same as the information submitted by manufacturers to the trade association;
      - (II) the information is true, complete, accurate, and in compliance with all applicable provisions of this Article;
      - (III) each appliance complies with the applicable standards in Section 1605.1; and

- (IV) for any appliance for which there is a standard in Section 1605.2 or Section 1605.3, that the appliance meets all applicable standards unless the directory states, in a format approved by the Executive Director (including without limitation font, type size, and placement in the directory), that it is illegal in California to sell the appliance or offer it for, or to install the appliance in Title 24 construction ~~unless the directory, in a manner specified by the Executive Director, clearly marks the appliances that do not comply and indicates that those appliances cannot legally be sold or offered for sale in California or be installed in Title 24 construction.~~
- (D) for each appliance that is listed in a trade association directory, the directory includes all of the following information, where applicable to the appliance:
- manufacturer;
  - brand;
  - model number as it appears on the appliance;
  - type;
  - fuel type;
  - voltage;
  - electrical phase;
  - capacity or other size measurement;
  - input;
  - output;
  - standby consumption, loss, or other similar measurement; and
  - energy efficiency ~~ratings~~, energy consumption, water efficiency, or water consumption;
- (E) the directory contains no appliance in the following categories:
- (i) an appliance that fails to meet an applicable energy efficiency, energy consumption, energy design, water efficiency, or water consumption standard established in or pursuant to NAECA or EPAAct;
  - (ii) an appliance for which the manufacturer has stated or certified that the appliance meets an energy efficiency, energy consumption, energy design, water efficiency, or water consumption standard not applicable to it; or
  - (iii) an appliance that does not, or an appliance whose manufacturer does not, meet an applicable requirement of this Article, unless the directory states, in a format approved by the Executive Director (including without limitation font, type size, and placement in the directory), that it is illegal in California to sell the appliance, or to install the appliance in Title 24 construction, as applicable; and
- (F) each directory contains the following statement, in at least 20 point bolded type and on the front cover or first page, or in another format and with other characteristics as specified by the Executive Director:

“This directory [insert parts if appropriate] has been approved by the California Energy Commission (Commission) for determining compliance with its appliance efficiency regulations (Title 20, California Code of Regulations, Sections 1601-1608) and its building standards (Title 24, California Code of Regulations, Part 6). UNLESS INDICATED OTHERWISE, any appliance listed in this directory [insert parts if appropriate] may be sold, offered for sale, or installed in new construction in California. For appliances manufactured by manufacturers participating in this directory, but who have not given authorization for data submittal to the Commission, this directory cannot be used for determining compliance. For information about such appliances, appliances that are beyond the scope of this directory, or appliances produced by manufacturers who do not participate in this directory, please contact the Commission’s Building Standards Hotline at 916-654-5106, 800-772-3300 (in California only), or [www.energy.ca.gov/efficiency/appliances/index.html](http://www.energy.ca.gov/efficiency/appliances/index.html) [eehomes@energy.state.ca.us](mailto:eehomes@energy.state.ca.us), manufacturers not granting authorization for data submittal to the Commission as of the publication date of this directory include [list all affected manufacturers]”; and

- (G) at the end of each calendar quarter, the trade association mails, at no cost to recipients, a paper copy of the current directory or supplement or part thereof to the Executive Director and to all California building officials as specified by the Executive Director, and provides to the Executive Director a list of the building officials to whom the directory or supplement was sent.
- (2) If the Executive Director at any time determines that an approved trade association directory does not comply with an applicable provision of this Article, or that any information in a trade association directory is substantially incomplete, inaccurate, or not in compliance with an applicable provision of this Article, then:
- (A) upon written notice from the Executive Director the trade association shall ~~immediately remove from the directory any appliance designated by the Executive Director and shall~~ immediately indicate in the directory, in a format approved by the Executive Director (including without limitation font, type size, and placement in the directory), that it is illegal in California to sell the appliance, or to install the appliance in Title 24 construction ~~directory in a manner specified by the Executive Director, that the appliance cannot legally be sold or offered for sale in California or installed in Title 24 construction.~~ In addition, the Executive Director shall remove the appliance from the Commission’s database established under Section 1606(c) or indicate in the database that the appliance cannot legally be sold or offered for sale in California or installed in Title 24 construction. The appliance shall be removed from, or indicated in, the Commission’s directory and the trade association directory, for at least sixty days, until the end of a proceeding held to consider the matter pursuant to Sections 11445.10-11445.60 of the California Government Code (or, at the third party or affected manufacturer’s option, pursuant to Sections 11425.10-11425.60 of the California Government Code); and
  - (B) the Executive Director may suspend or revoke the approval of the trade association directory; if approval is revoked, the trade association may not seek re-approval for two years after the revocation.

- (3) If the Executive Director takes action under Sections 1606(b)(2)(A) or (B), or 1608(~~d~~c), (~~e~~d), or (~~f~~e), he or she shall direct that all trade associations directories be modified accordingly.
- (4) There may be more than one third-party directory for the same appliance.

(i) **Retention of Records**

Manufacturers, and third parties or trade associations acting under Sections 1606(a), 1606(f), and 1606(g), shall retain all data, forms, information, and all other records required by this Article concerning each appliance (1) for at least ~~10 years after the record is created, or until~~ 2 years after the manufacturer informs the Executive Director, in writing, of the cessation of production of the appliance, ~~whichever is longer~~; and (2) in a manner allowing ready access by the Executive Director on request. The Executive Director shall retain all data, forms, information, and all other records required by this Article concerning each appliance for at least 10 years after the record is initially filed or reconfirmed.

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
Reference: Sections 25402(c) and 25960, Public Resources Code.

**Section 1607. Marking of Appliances.****(a) Scope of this Section.**

Every unit of every appliance within the scope of Section 1601 shall comply with the applicable provisions of this Section.

**(b) Name and Model Number.**

The manufacturer's name, brand name, or trademark, and the model number, shall be permanently and legibly displayed on each unit or, for plumbing fittings on the unit's packaging. Where there is a nameplate, the display shall be on the nameplate. On appliances without nameplates, the display shall be in a conspicuous and accessible place on the unit.

**(c) Date of Manufacture.**

The date of manufacture, and other date information chosen by the manufacturer, shall be permanently and legibly displayed on an accessible and conspicuous place on each unit or, for plumbing fittings, on the unit's packaging, in the following format: month and four digit year.

**(d) Energy Performance Information.****(1) Federally-Regulated Consumer Products.**

- (A) The marking required by 16 CFR Part 305 (2001) shall be displayed on all units of all federally-regulated consumer products of the following classes:

Refrigerators  
Refrigerator-freezers  
Freezers  
Central air conditioners  
Heat pumps  
Dishwashers  
Water heaters  
Room air conditioners  
Warm air furnaces  
Pool heaters  
Clothes washers  
Clothes dryers  
Fluorescent lamp ballasts  
Showerheads  
Faucets  
Water closets  
Urinals  
General service fluorescent lamps  
Incandescent reflector lamps  
Direct heating equipment  
Medium-base compact fluorescent lamps

Cooking equipment (kitchen ranges and ovens)

(B) In addition, beginning on the effective date of the central air conditioner standards in Section 1605.2(c)(1), the following information shall be permanently and legibly displayed on an accessible and conspicuous place on all units subject to those standards:

(i) EER; and

(ii) “Complies with California TXV requirement”

- (2) **Federally-Regulated Commercial and Industrial Equipment:** Each unit of an appliance listed in Table V that is federally-regulated commercial and industrial equipment ~~except for split system central air conditioners and split system heat pumps~~ shall be marked, permanently and legibly on an accessible and conspicuous place on the unit, with the applicable energy performance information shown in Table V, and such information shall also be included on all printed material that is displayed or distributed at the point of sale.

**Table V**  
**Requirements for Marking of Federally-Regulated Commercial and Industrial Equipment**

<i>Class</i>	<i>Energy Performance Information</i>
Split system central air conditioners	Cooling capacity, SEER, EER <u>(on printed material only)</u>
Single package central air conditioners	Cooling capacity, SEER, EER
Split system heat pumps	Cooling capacity, heating capacity, SEER, EER, HSPF, COP (on printed material only)
Single package heat pumps	Cooling capacity, heating capacity, SEER, EER, HSPF, COP <del>(on printed material only)</del>
Package terminal air conditioners	Cooling capacity, EER
Package terminal heat pumps	Cooling capacity, heating capacity, EER, COP
Warm air furnaces	Input rating, thermal efficiency
Packaged boilers	Input rating, thermal efficiency, combustion efficiency
Water heaters	Input rating, rated storage volume, measured storage volume, thermal efficiency, standby loss (%/hr), standby loss (Btu/hr)
Hot water supply boilers	Rated input, rated storage volume, measured storage volume, thermal efficiency, standby loss

- (3) **Air Conditioners, Heat Pumps, Furnaces, Boilers, and Water Heaters.** ~~Air~~ Each unit of air conditioners, heat pumps, furnaces, boilers, and water heaters that are not subject to NAECA and that comply with the October 29, 2001 provisions in Tables 6.2.1 A through G of ASHRAE/IESNA Standard 90.1-1999 shall be marked, permanently and legibly on an

accessible and conspicuous place on the unit, with a statement that the equipment complies with the 2001 requirements of ASHRAE Standard 90.1. ~~Other~~ Each unit of other air conditioners, heat pumps, furnaces, boilers, and water heaters that are not subject to NAECA and that comply with the October 29, 1999 provisions (but not with the October 29, 2001 provisions) in Tables 6.2.1 A through G shall be marked, permanently and legibly on an accessible and conspicuous place on the unit, with a statement that the equipment complies with the 1999 requirements of ASHRAE Standard 90.1.

- (4) **Distribution Transformers.** ~~Distribution~~ Each unit of distribution transformers shall comply with the labeling requirements of NEMA Standard TP3-2000.
- (5) **Illuminated Exit Signs.** Each unit of illuminated ~~Huminated~~ exit signs meeting the criteria of Section 1605.3(1) that are sold in California (subject to the limitations of Section 1601) shall be marked by the manufacturer with a block E inside a circle; the mark commonly referred to as "Circle E". The size of the mark shall be commensurate with other markings on the sign, but not smaller than 1/4". Signs not meeting 1605.3(1) shall not be so marked.
- (6) **Luminaires.** Each unit of torchieres and each package containing a torchiere shall be marked, permanently and legibly on an accessible and conspicuous place on the unit, in characters no less than 1/8" on the inner surface of the reflector bowl of the torchiere, and 1/4" on the packaging, "LAMPS MUST BE NO MORE THAN 190 WATTS."

The following standards are incorporated by reference in Section 1607.

**Number**

**Title**

**FEDERAL MARKING REQUIREMENTS**

CFR, Title 16, Part 305 (2001)

Copies available from:

Superintendent of Documents  
U.S. Government Printing Office  
Washington, D.C. 20402  
[www.access.gpo.gov/nara/cfr](http://www.access.gpo.gov/nara/cfr)

**AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)**

ANSI/ASHRAE 90.1-1999

Energy Standard for Buildings Except Low-Rise Residential Buildings

Copies available from:

American Society of Heating, Refrigerating and  
Air-Conditioning Engineers  
1791 Tullie Circle N.E.  
Atlanta, GA 30329  
[www.ashrae.org](http://www.ashrae.org)  
Phone: (800) 527-4723 (U.S./Canada) or (404) 636-8400



FAX: (404) 321-5478

**NATIONAL ELECTRIC MANUFACTURERS ASSOCIATION (NEMA)**

NEMA TP3-2000                      Standard for the Labeling of Distribution Transformer Efficiency

Copies available from:              National Electric Manufacturers Association  
1300 N. 17<sup>th</sup> Street, Suite 1847  
Rosslyn, VA 22209  
[www.nema.org](http://www.nema.org)  
Phone: (703) 841-3200  
FAX: (703) 841-3300

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
Reference: Sections 25402(c) and 25960, Public Resources Code.

## **Section 1608. Compliance, Enforcement, and General Administrative Matters.**

### **(a) General Requirements for the Sale or Installation of All Appliances.**

Any unit of any appliance within the scope of Section 1601 may be sold or offered for sale in California, or installed in Title 24 construction, only if:

- (1) the appliance appears in the most recent database established pursuant to Section 1606(c);
- (2) the manufacturer has:
  - (A) tested the appliance as required by Sections 1603 and 1604;
  - (B) marked the unit as required by Section 1607;
  - (C) for any appliance for which there is an applicable standard in Section 1605.1, 1605.2, or 1605.3, certified under Section 1606(a) that the appliance complies with the standard;
- (3) the unit has the same components, design characteristics, and all other features that affect energy or water consumption or energy or water efficiency, as applicable, as the units that were tested under Sections 1603 and 1604 and for which information was submitted under Section 1606(a); and
- (4) for any appliance for which there is an applicable standard in Section 1605.1, 1605.2, or 1605.3, the unit complies with the standard.

### **(b) Appliances Not in Database.**

If the Executive Director determines that an appliance that is not in the database is being sold or offered for sale in California, or installed or intended to be installed in Title 24 construction, he or she shall take appropriate legal action to restrain and discourage such sale, offering, installation, or intent, including, but not limited to testing units of the appliance at the manufacturer's cost and seeking appropriate judicial action.

### **(c) All Appliances: Submittal of Reports of Manufacturers' Certification Testing.**

- (1) For any appliance, the Executive Director may at any time request from a manufacturer a copy of the test report that describes the results of the testing that was performed pursuant to Section 1604 and that provides the basis for the information submitted under Section 1606(a)(3)(D). The request shall be sent to the address or e-mail address designated in Section 1606(a)(2)(B). If the appliance is a commercial refrigerator, commercial refrigerator-freezer, commercial freezer, large storage water heater, or plumbing fitting, or if the Executive Director includes with the request information that, in his or her opinion, constitutes substantial evidence that the appliance or the manufacturer is not in compliance with an applicable provision of this Article, or that the energy or water performance of the appliance is not as certified under Section 1606(a)(3)(D) or is not as required by an applicable standard in Section 1605.1, 1605.2, or 1605.3, then the manufacturer shall

provide a copy of the applicable test report to the Executive Director within 5 days of the manufacturer's receipt of the request.

- (2) If the Executive Director does not receive the test report within the required time, the Executive Director shall remove the appliance from the database.
- (3) If the test report indicates that the energy or water consumption of the appliance is greater than, or the energy or water efficiency of the appliance is less than, the consumption or efficiency certified by the manufacturer pursuant to Section 1606(a)(3)(D), ~~(where the exception to Section 1606(a)(3)(D)(i) is used, either value certified)~~, the Executive Director shall, after providing written notice by certified mail to the person designated in Section 1606(a)(~~1~~2)(B), modify the listing of the appliance in the database to reflect accurately the test report.
- (4) If the test report indicates that the appliance model does not comply with an applicable standard in Section 1605.1, 1605.2, or 1605.3, the Executive Director shall, ten days after providing written notice by certified mail to the person designated in Section 1606(a)(~~1~~2)(B), remove the model from the database.

(d) **Inspection by the Executive Director of Appliances Subject to Energy Design, and Water Design Standards, and Marking ~~Standards~~Requirements.**

- (1) The Executive Director shall periodically inspect appliances sold or offered for sale in the state, or installed or intended to be installed in Title 24 construction, to determine whether they conform with the applicable energy design and water design standards of Sections 1605.1, 1605.2, and 1605.3, and with the applicable marking requirements of Section 1607.
- (2) Inspection of an appliance shall consist of inspection of one unit.
  - (A) If the inspection indicates that the unit complies with the applicable energy or water design standard, ~~water design, and or~~ marking requirements, the matter shall be closed.
  - (B) If the inspection indicates that the unit does not comply with an applicable energy or water design standard or marking requirements, the Commission shall undertake a proceeding pursuant to Sections 11445.10-11445.60 of the California Government Code (or, at the manufacturer's option, pursuant to Sections 11425.10-11425.60 of the California Government Code). If the Commission confirms the Executive Director's determination, then he or she shall remove the appliance from the database.

(e) **Executive Director's Enforcement Testing of Appliances Subject to Energy Efficiency, Energy Consumption, ~~and~~ Water Efficiency, and Water Consumption Standards.**

The Executive Director shall periodically cause, at laboratories meeting the criteria of Section 1603(a), the testing of appliance units sold or offered for sale in the state, or installed or intended to be installed in Title 24 construction, to determine whether the appliances conform with the applicable standards in Sections 1605.1, 1605.2, and 1605.3, and to determine whether their performance is as reported or certified by the manufacturer pursuant to Sections ~~1606(a)~~. Within

ten working days of receipt of a request from any person that such testing be done, the Executive Director shall inform the person of the estimated cost of the testing. Testing shall be performed as follows:

- (1) **Initial Test.** The Executive Director shall perform an initial test on one unit, using the applicable test procedure specified in Section 1604. Upon completion of the initial test, the Executive Director shall make a determination as follows:
  - (A) **Performance Is No Worse Than Required by Standards and Is No Worse Than as Certified by Manufacturer.** If the initial test result indicates that the energy and water consumption of the unit is no greater than, and the energy and water efficiency of the unit is no less than, the consumption or efficiency that is permitted and required by all applicable standards in Section 1605.1, 1605.2, or 1605.3, and that was certified by the manufacturer pursuant to Section 1606(a), the matter shall be closed.
  - (B) **Performance Is Worse Than Required by Standard or Is Worse Than as Certified by Manufacturer.** If the initial test result indicates that the energy or water consumption of the unit is greater, or the energy or water efficiency of the unit is less, than the consumption or efficiency that is permitted or required by any applicable standard in Section 1605.1, 1605.2, or 1605.3, or that was certified by the manufacturer pursuant to Section 1606(a), the Executive Director shall perform a second test on a second unit, using the applicable test procedure specified in Section 1604.
- (2) **Second Test; Mean of Results.** If a second test is performed, the Executive Director shall calculate the mean of the results of the initial test and the second test. Upon completion of the second test, the Executive Director shall inform the manufacturer of the results and shall make a determination as follows:
  - (A) **Performance Is No Worse Than Required by Standards and Is No Worse Than as Certified by Manufacturer.** If the two test results indicates that the mean energy and water consumption of the two units is no greater than, and the mean energy and water efficiency of the two units is no less than, the consumption and efficiency permitted or required by all applicable standards in Section 1605.1, 1605.2, or 1605.3, and that was certified by the manufacturer pursuant to Sections 1606(a)(3)(E) and 1606(a)(4) (where the exception to Section 1606(a) applies), the matter shall be closed.
  - (B) **Performance is As Required by Standard but is Worse Than as Certified by Manufacturer.** If the two test results indicate that the mean energy or water consumption of the two units is greater than, or the mean energy or water efficiency of the two units is less than, the consumption or efficiency that was certified by the manufacturer pursuant to Section 1606(a), but that the mean result nevertheless complies with all applicable standards in Section 1605.1, 1605.2, or 1605.3, the Commission shall undertake a proceeding pursuant to Sections 11445.10-11445.60 of the California Government Code (or, at the manufacturer's option, pursuant to Sections 11425.10-11425.60 of the California Government Code). If the Commission determines that the two test results indicate that (1) the mean energy or water

consumption of the two units is greater than, or the mean energy or water efficiency of the two units is less than, the consumption or efficiency as reported or certified by the manufacturer pursuant to Sections 1606(a), and (2) the mean result nevertheless complies with all applicable standards in Section 1605.1, 1605.2, or 1605.3, then the Executive Director shall modify the listing of the appliance in the database to reflect accurately the Commission's determination.

- (C) **Performance is Not As Required by Standard.** If the two test results indicate that the mean energy or water consumption of the two units is greater than, or the mean energy or water efficiency of the two units is less than, any applicable standard in Section 1605.1, 1605.2, or 1605.3, the Commission shall undertake a proceeding pursuant to Sections 11445.10-11445.60 of the California Government Code (or, at the manufacturer's option, Sections 11425.10-11425.60 of the California Government Code). If the Commission determines that the mean energy consumption or water consumption of the two units is greater than, or the mean energy or water efficiency of the two units is less than any applicable standard, the Executive Director shall remove the appliance from the database established pursuant to Section 1606(~~de~~).

- (3) **Optional Method of Determining Energy or Water Performance.** If, at any time before a Commission determination under Section 1608(d)(2)(B) or 1608(e)(2)(C), the manufacturer so chooses, instead of using the mean-of-two-units approach set forth in Sections 1608(~~de~~)(1) and 1608(~~de~~)(2), the Executive Director shall test the appliance using the sampling method set forth in 10 CFR Part 430, Appendix B to Subpart F (2001), and shall make the determinations under Sections 1608(~~de~~)(1) and 1608(~~de~~)(2) based on those test results. The manufacturer shall pay for all such testing.

(f) **Costs.**

Except as otherwise provided in this Article, all costs of initial tests showing results as described in Section 1608(d)(2)(A) shall be borne by the Commission. All costs of all other tests shall be paid by the manufacturer.

(g) **Federally-Regulated Appliances.**

If:

- (1) the appliance tested is a federally-regulated consumer product or federally-regulated commercial and industrial equipment; and
- (2) either:
  - (A) the test results show that the appliance does not comply with an applicable federal standard or other applicable federal requirement; or
  - (B) the test results are at variance with the results reported by the manufacturer to the U.S. Department of Energy or the U.S. Federal Trade Commission;

then, in addition to taking the applicable actions described in Sections 1608(e)(1) and 1608(e)(2), the Executive Director shall inform the appropriate federal agency.

**(h) Forms and Formats Specified by Executive Director.**

The Executive Director may specify, and require the use of, any particular form or format for the submittal of any data, reports, or other information required by this Article, including but not limited to computer programs or formats.

**(i) Executive Director Determinations.**

Whenever this Article refers to a finding, conclusion, or other determination by the Executive Director, any person seeking such a determination shall submit to the Executive Director a written request. Within 21 days of receipt of a request, the Executive Director shall make a determination, which shall be within the discretion of the Executive Director acting on the basis of the entire record, which shall be assembled and made publicly available by the Executive Director. Within 10 days of a determination, whether made in response to a request or made on the Executive Director's own initiative, any affected person, including but not limited to the person, if any, who made a request for the determination, may appeal the determination to the Commission in writing. At the same time that the appeal is filed, the appellant shall file all the evidence the appellant wishes the Commission to consider. The Commission Staff and any affected person shall file all the evidence they wish the Commission to consider within 20 days after the appeal is filed. The Commission shall hear and decide the appeal at the next regularly-scheduled business meeting that is at least 30 days after the appeal is filed. At the hearing the Commission may require the filed evidence to be presented under oath and may allow questions and cross-examination from participants.

**~~(j) Supplemental Compliance Requirements.~~**

~~See Section 1609(b) for supplemental compliance requirements.~~

NOTE: Authority cited: Sections 25213, 25218(e), and 25402(c), Public Resources Code.  
Reference: Sections 25402(c) and 25960, Public Resources Code.





## **Title 24**

# **ENERGY EFFICIENCY STANDARDS FOR RESIDENTIAL AND NONRESIDENTIAL BUILDINGS**

## **CALIFORNIA CODE OF REGULATIONS TITLE 24, PART 6**

### **Subchapter 2**

### **All Occupancies - Mandatory Requirements for the Manufacture, Construction and Installation of Systems, Equipment and Building Components.**

#### **Section 110 – Systems and Equipment - General**

Sections 111 through 119 establish requirements for the manufacture, construction, and installation of certain systems, equipment and building components that are installed in buildings regulated by Title 24, Part 6. Systems, equipment and building components listed below may be installed only if:

- (a) The manufacturer has certified that the system, equipment or building component complies with the applicable manufacture provisions of Sections 111 through 119;
- (b) The system, equipment or building component complies with the applicable installation provisions of Sections 111 through 119 ; and

No system, equipment, or building component covered by the provisions of Sections 111 through 119 that is not certified or that fails to comply with the applicable installation requirements may be installed in a building regulated by Title 24, Part 6.

The systems, equipment and building components covered are:

Appliances regulated by the Appliance Efficiency Regulations which are hereby incorporated by reference (Section 111).

Other space-conditioning equipment (Section 112).

Other service water-heating systems and equipment (Section 113).

Pool and spa heating systems and equipment (Section 114).

Gas appliances (Section 115).

Doors, windows, and fenestration products (Section 116).

Joints and other openings (Section 117).

Insulation and cool roofs (Section 118).

Lighting control devices (Section 119).

**Section 111 – Mandatory Requirements for Appliances Regulated by the Appliance Efficiency Regulations**

- (a) Any appliance for which there is a California standard established in the Appliance Efficiency Regulations, which are hereby incorporated by reference, may be installed only if the manufacturer has certified to the Commission, as specified in those regulations, that the appliance complies with the applicable standard for that appliance. See Appendix 1-A for availability of directories of certified appliances.
- (b) In determining whether an appliance complies with both these regulations and the Appliance Efficiency Regulations, differences between the regulations shall be resolved by separating out the individual elements of each applicable regulation and applying the element which is the most restrictive (consumes the least energy or provides the most energy savings) to the appliance in question. For example, in the case of large water heaters, the efficiency standards in each set of regulations combine a numerical thermal efficiency performance measure and a numerical standby loss performance measure. The thermal efficiency and standby loss measures shall be examined separately and the most restrictive versions of each combined, along with their respective test methods, to yield the standards that the appliance must satisfy.